



කෘෂි නවීකරණ ව්‍යාපෘතිය
விவசாய நவீகமாக்கல் திட்டம்
Agriculture Modernization Project



කෘෂිකර්ම අමාත්‍යාංශය
Ministry of Agriculture
கமத்தொழில் அமைச்சு

Environmental Screening Report

Strengthening Capacity to Enhance Planting Material Production of Vegetables- Construction of Poly Tunnels and Thermo-Gradient Tunnels at Gannoruwa, Kundasale and Dodangolla



University Experimental
Station, Dodangolla, Kundasale, Sri Lanka.



Project Management Unit
Agriculture Sector Modernization Project
January 2022

Table of Contents

ABBREVIATIONS	4
A. THE PROJECT IDENTIFICATION.....	5
B. PROJECT LOCATION	5
C. PROJECT JUSTIFICATION	12
D. PROJECT DESCRIPTION	15
E. DESCRIPTION OF PROPOSED SUBPROJECT ACTIVITIES.....	17
F. DESCRIPTION OF THE EXISTING ENVIRONMENT.....	26
G. SOCIO-ECONOMIC ENVIRONMENT.....	30
H. SCREENING OF POTENTIAL ENVIRONMENTAL IMPACTS.....	34
I. CONCLUSION AND SCREENING DECISION SUMMARY OF ENVIRONMENTAL EFFECTS:	39
J. ENVIRONMENTAL MANAGEMENT PLAN	40
K. OPERATIONAL ENVIRONMENT MANAGEMENT PLAN	49
K. EMP IMPLEMENTATION RESPONSIBILITIES AND COST.....	53
L. DETAILS OF PERSON RESPONSIBLE FOR THE ENVIRONMENTAL SCREENING.....	53
M. DETAILS OF PERSONS RESPONSIBLE FOR THE ENVIRONMENTAL SCREENING	53
N. ANNEXES	54
Annex 1: Google Map/ Location Map	55
Annex 2: Organizational Structure of HORDI.....	58
Annex 3: Organizational Structure of University Experimental Station- Dodangolla.....	59
Annex 4: Design drawings of New Construction and Renovation Activities.....	60
Annex 5: Interim Guidelines on COVID-19 of World Bank.....	68
Annex 6: CEA- Licensed e-waste Collectors in Sri Lanka	81

FIGURES

Figure 1: Location of HORDI @ Gannoruwa	6
Figure 2: Location of Seed and Planting Material Production Farm @ Kundasale.....	6
Figure 3: Location of University Experimental Station @ Dodangolla.....	6
Figure 4: Horticultural Crops Research and Development Institute.....	7
Figure 5: Seed Farm at Kundasale.....	8
Figure 6: A research activity in a polytunnel at University Experimental Station	9
Figure 7: An earthen pond located within seed farm.....	11
Figure 8: A facility building located in the station	11
Figure 9: Land identified to construct the polytunnels.....	21
Figure 10: The greenhouses identified to rehabilitate.....	21
Figure 11: Existing polytunnels	22
Figure 12: Area identified to construct new polytunnels under ASMP	22
Figure 13: An earthen pond that uses for irrigation.....	22
Figure 14: Land identified to construct new polytunnels	24

Figure 15: Ongoing research at a polytunnel..... 24

TABLES

Table 1: Responsible Officers in HORDI Project Activities 30
Table 2: Consultation outputs..... 32

ABBREVIATIONS

AI	Agriculture Instructor
ASMP	Agriculture Sector Modernization Project
ASC	Agrarian Service Center
ATDP	Agricultural Technology Demonstration Park
CBO	Community-Based Organization
DSD	Divisional Secretary Division
EMF	Environmental Management Framework
EMP	Environmental Management Plan
ESR	Environmental Screening Report
FO	Farmers Organization
FPO	Farmers' Production Organization
GAP	Good Agricultural Practices
GND	Grama Niladhari Division
GoSL	Government of Sri Lanka
IDA	International Development Association
IEE	Initial Environmental Examination
IPM	Integrated Pest Management
LGA	Local Government Authority
MOA	Ministry of Agriculture
MOPI	Ministry of Primary Industries
NIRP	National Involuntary Resettlement Policy
NGO	Non-Governmental Organization
OP	Operational Policy
PAP	Project Affected Persons
PCR	Physical Cultural Resources
PMP	Pest Management Plan
PMU	Project Management Unit
SLRs	Sri Lanka Rupees

ENVIRONMENTAL SCREENING REPORT (ESR)

A. THE PROJECT IDENTIFICATION

Project Title	Strengthening Capacity to Enhance Planting Material Production of Vegetables- Construction of Poly Tunnels and Thermo-Gradient Tunnels at Gannoruwa, Kundasale and Dodangolla
Project Proponent	Agriculture Sector Modernization Project (ASMP)
Purpose and scope of ESR	The purpose of the ESR is to provide viable mitigation measures against all identified environmental impacts during the screening process of the subproject. This ESR includes the basic information of the subproject, justification of the subproject selection, anticipated impacts, and environmental condition of the subproject area, and stakeholder consultations and concerns on subproject identification, designing, and implementation, the implementation plan of the viable mitigation measures against the identified environmental impacts.

B. PROJECT LOCATION

Location	<p>The subproject's activities will be mainly implemented in 3 different locations. They are;</p> <ol style="list-style-type: none">1. Horticultural Crops Research and Development Institute (HORDI) at Gannoruwa- The institute is located at Gannoruwa 8 km away from Kandy city in Yatinuwra DS division of Kandy district in Central Province.2. Government Seed and Planting Material Production Farm at Kudasale- The farm is located at Kundasale 10.4km away from Kandy city in Kundasale DS division of Kandy district in Central Province3. University Experimental Station at Dodangolla, Kundasale- University experimental station is located at Dadangolla 11.7km away from Kandy city in Kundasale DS division of Kandy district in Central Province <p>Under this subproject, construction of Polytunnels and Thermo-Gradient Tunnels will be implemented for strengthening the research and seed production facilities of the station. The location maps are annexed as Annex 1.</p>
-----------------	--

Location (Google Map)

1. HORDI @ Gannoruwa
7°16'25.70" N
80°36'08.89" E

2. Seed Farm @ Kundasale
7°17'00.67" N
80°41'17.16" E

3. University Experimental Station @ Dodangolla
7°17'07.21" N
80°42'28.24" E

1. Horticultural Crops Research Development Institute (HORDI)- Gannoruwa

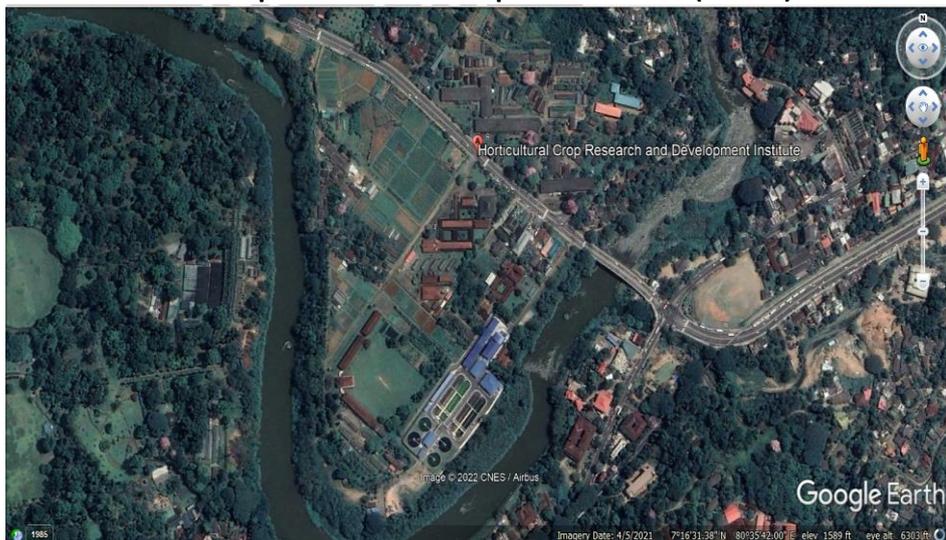


Figure 1: Location of HORDI @ Gannoruwa

2. Seed and Planting Material Production Farm at Kundasale

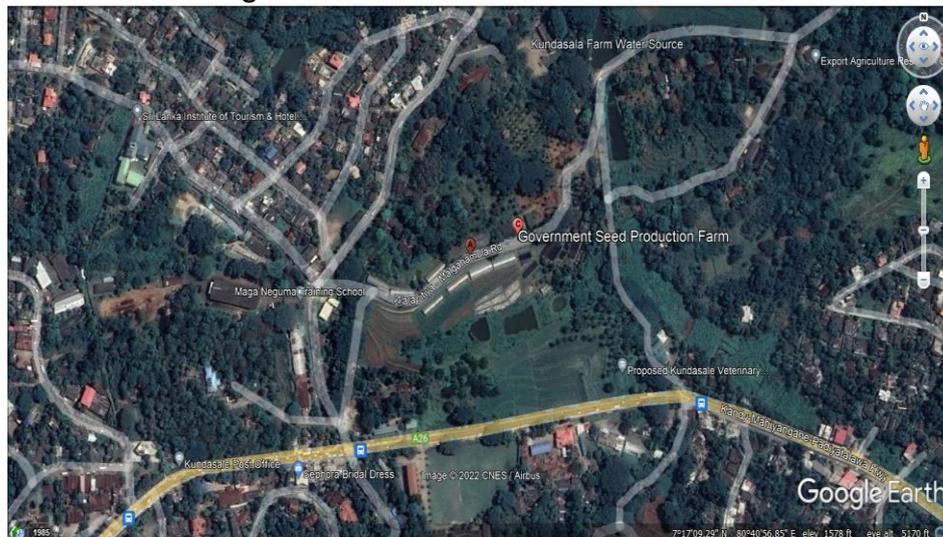


Figure 2: Location of Seed and Planting Material Production Farm @ Kundasale

3. University Experimental Station at Dodangolla

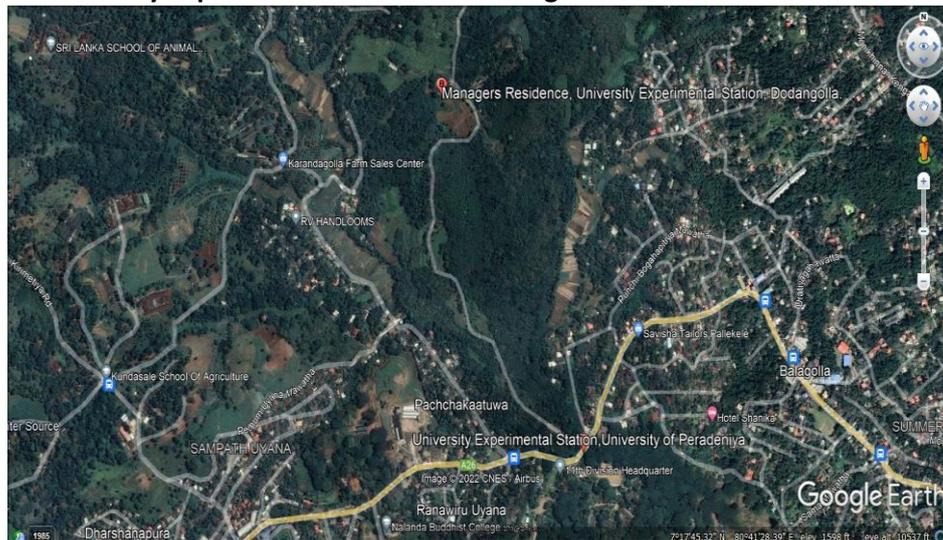


Figure 3: Location of University Experimental Station @ Dodangolla

Definition of Project Area

(The geographical extent of the project & areas affected during construction)

1. Horticultural Crops Research and Development Institute (HORDI)

The Horticultural Crop Research and Development Institute (HORDI) is vested with the responsibility of technology development concerning vegetables, root and tuber crops and floriculture. The research program focuses on the development of improved crop varieties, new propagation methods, post-harvest and food processing methods, the use of protected culture and ensuring better plant health with fewer dependants on chemicals. It is situated at Gannoruwa Peradeniya, coordinating the network of RARDCS, ARSS and horticultural farms.

History of HORDI

The Department of Agriculture was established in 1912 and the Division of Research was one of its important sections that provide scientific information for establishment of major plantation crops, tea, rubber coconut and other plants of economic and ornamental importance.

Three separate institutions for tea, rubber and coconut were established and thereafter the Division of Research in the Department of agriculture placed the emphasis on peasant agriculture and established the Central Agricultural Research Institute.

The foundation stone for new laboratories of the Central Agricultural Research Institute was laid in Gannoruwa on 21 June 1958 by the Honorable S.W.R.D Bandranayake. Honorable Dudley Senanayaka, late Prime Minister of Ceylon, formally declared the Institute open on 6th August 1967. Apart from the administrative Headquarters housed in the institute, there were Research divisions of Agricultural Botany, Agricultural Chemistry, Plant Pathology, Entomology, Horticulture, Food technology, Minor plantation crops, Tobacco & soil conservation and Statistics.

With re-structure of the Department of Agriculture, three national Institutes were formed in 1994 to conduct research and development activities on horticulture, rice & field crops. The Central Agriculture Research Institute at Gannoruwa was renamed as Horticultural Crop Research and Development Institute to carryout efficient and intensive research & development work on horticulture.



Figure 4: Horticultural Crops Research and Development Institute

There are ten sub units comes under HORDI. Regional wise research activities are carried out at these sub stations with coordination of HORDI.

2. Seed and Planting Material Production Farm- Kundasale

The Seed and Planting Material Development Center (SPMDC) has been established under the Department of Agriculture to achieve the vision of achieving excellence in Agriculture through increasing quality seed and planting materials. SPMDC has established 29 regional seed production farms over the country and Seed Farm-Kundasale is one of among them. The seed and planting material production farm was established in Kundasale as the affiliated center by SMPDC and its main objective is locally producing vegetable seeds to supply high-quality planting materials to the growers.



Figure 5: Seed Farm at Kundasale

The cultivatable land extent belongs to seed and planting materials farm is about 60ha (150 acres). Meanwhile, research station buildings, farm's buildings, polytunnels, and the road network covers considerable land extent.

Agriculture School is located adjoining to this seed farm. This seed far has been established in the agro-ecological zone belonging to the mid-country intermediate zone (IM3). The surrounding area is predominantly steep hilly terrain areas where the land use is mixed (agriculture, residential, commercial and scrublands).

3. University Experimental Station- Dodangolla

The University Experimental Station is based at Dodangolla, Kundasale in the mid country intermediate zone (IM3) in Sri Lanka. The farm was established in 1968 for the purpose of utilizing for the undergraduate academic program offered by the Faculty of Agriculture, University of Peradeniya and provides great support in outreach training program and research opportunities, offered for various government, private and non-government organizations in the country and promote collaborative research with foreign universities, on agriculture and allied field of study.



Figure 6: A research activity in a polytunnel at University Experimental Station

The farm occupies 79 ha (195 Acres) of land which is extending from sloppy landscape to flat landscape. Meanwhile, experimental station buildings, students and staff accommodation buildings, polytunnels, and the road network covers considerable land extent.

The surrounding area is predominantly from sloppy landscape to flat landscape areas where the land use is mixed (agriculture, residential, commercial and scrublands).

Adjacent land and features

1. Horticultural Crops Research and Development Institute (HORDI)

The HORDI administration complex, laboratories, and cultivation area are located on the land belongs to DOA. The land with an extent about 120ha (300acres) is allocated for the several government institutions comes under DOA in Gannoruwa. The area where HORDI is located belongs to Yatinuwara DS division of the Kandy district in Central Province. The area belongs to the Mid country wet zone.

The mission of the institute is functioning as the national center for research and development of sustainable and productive technologies for horticultural crops to ensure economic and social development of the farmers, and other stakeholders.

The HORDI promotes the Good Agricultural Practices (GAP) program for the quality assurance of agricultural products as healthy products through their research activities.

As the development perspective, HORDI transfer new technologies which are developed by the research divisions to the agriculture extension officers, vegetable farmers, students (School, School of Agriculture & University) Entrepreneurs in the private sector. Improve the research extension linkage by coordinating research extension dialogue, technology demonstrations at farmer fields. Coordinating and testing of adaptability on research-proven technologies of HORDI at field level.

The administrative complex and the labs are located together bounded to Gannoruwa Kandy road. The cultivation area used for the research activities is bounded by Kandy- Gannoruwa main road and Mahaweli river. There are many government institutions located surrounding area.

They are;

- Seed Certification and Plant Protection Center
- Plant Genetic Resource Center (PGRC)
- Gannoruwa Agricultural Complex

- Agro Technology Park Unit
- Agro Enterprise Development & Information Service
- Quality Seeds and Planting Material and Agriculture Publications Sales Center
- Inservice Training Center
- Plant Protection Service
- Fruit Crop Research and Development Station
- Food Research Unit
- National Agriculture Information and Communication Center
- Plant Propagation and Nursery Management Division
- Natural Resource Management Center
- Vegetable Seed Center
- Central seed Testing Laboratory
- Veterinary Research Center (VRI)
- Sri Lanka Army- Gannoruwa Camp
- Provincial Surveyor General's Office
- Hadabima Authority of Sri Lanka
- Government Staff Quarters and Circuit Bungalows

The Department of Agriculture is one of the few departments that has been established out of the capital city Colombo Sri Lanka. Therefore, many institutes affiliated with DOA are centralized in Gannoruwa and Peradeniya area.

A part of DOA- owned land is used for the demonstration cultivations, research activities (cultivations), and agriculture park by the relevant institutions. Except for the DOA and other government agencies' owned land, there are no agricultural lands in the surrounding area. All the private lands located surrounding areas are residential or commercials. Mahaweli river flows adjoining the DOA-owned land. The opposite side of the Mahaweli River is bounded by the Royal Botanical Garden of Sri Lanka.

2. Seed and Planting Material Production Farm- Kundasale

The total land extent under seed farm is about 60ha (150 acres). This land extent is covered by the cultivatable area, seed farm station buildings, polytunnels, and road networks. There are five earthen ponds located within the farmland. These ponds are used for irrigation activities of the farm.



Figure 7: An earthen pond located within seed farm

The seed farm is located in the area that belongs to Kundasale DSD of Kandy district in Central Province. The main task of the seed farm is to ensure the availability of quality seed and planting material to satisfy the demand of local growers through the development of the local seed production industry with the participation of the public and private sectors.

The agriculture school- Kundasale is located adjoining to the seed farm and operated separately. The surrounding area adjacent to the farmland is owned by private owners. The land use of the surrounding area is agriculture, residential and commercial. The farm is located separately from other institutions. There is no encroachment, activities, or accesses of other parties are get affected or disturbed by their activities

3. University Experimental Station- Dodangolla

The total land extent under experimental station is about 79ha (195 acres). This station has facilities for residential training programs, agricultural demonstrations and research trials. Students of the University of Peradeniya and students from other Sri Lankan and foreign universities conduct their Bachelors, Masters and Doctoral field experiments at this station. In addition, leading local and foreign private organizations use the unit for research purposes. Very importantly, the unit offers very good facilities for academia of the University of Peradeniya to conduct research programs.

Approximately 50% of the station's land is covered with perennial tree species such as Teak, Coffee and Coconut.



Figure 8: A facility building located in the station

	<p>This experimental site is located separately from other institutions and human settlement areas. The land is owned by the University of Peradeniya and vested by the faculty of agriculture.</p> <p>The surrounding area adjacent to the station is owned by private owners. The land use of the surrounding area is agriculture, residential and commercial. There is no encroachment, activities, or accesses of other parties are get affected or disturbed by the station’s activities or vice-versa.</p>
--	--

C. PROJECT JUSTIFICATION

<p>Need for the project (What problem is the project going to solve)</p>	<p>ASMP has launched its activities in nine districts of seven provinces of the country. Project Management Unit (PMU) and Provincial Project Management (PPMUs) directly implement the two kinds of subproject activities that mainly consist with Productivity Enhancement and Diversification Demonstrations and the infrastructure development programs. The Department of Agriculture (DOA) acts as the main project partner agency of Productivity Enhancement and Diversification Demonstrations. DOA’s activities consist with designing of subprojects, training farmers, monitoring subprojects’ activities and involving the troubleshooting of the program.</p> <p>Strengthening infrastructure and Technological/Technical capacities of the Department of Agriculture is an essential need to ensure provision services and follow up support for the farmer production organization (FPOs) established under the Component 2 of the Agriculture Sector Modernization Project (ASMP). This is further to the basic field facilities established for basic seed production of chilly and maize (FIELD CROPS CENTER), vegetables including potato (VEGETABLES CENTER) and the fruit crops (FRUIT Center), which the centers of excellence of the relevant crop categories established at Mahailuppallama (including Kilinochchi and Aralaganiwila), Gannoruwa/ Kundasale/ Dondagolla/ Seetha Eliya Complex, and Horana, respectively.</p> <p>Furthermore, addressing issues related to food safety are pivotal owing to the increased trend of non-communicable diseases in Sri Lanka, thus, prompting people be more health conscious in terms of food they consume. This is true for both processed or packed food as well as fresh produce. Though some of the safety standards and traceability systems are available for processed food, food safety certification for fresh agricultural produce is still a new concept to Sri Lankan consumers.</p> <p>Hence, apart from having basic seed production to support enhanced productivity drive and farmer livelihood development through the component 2 of the ASMP, fulfilling requirement of certified safe food is considered important through the promotion of SL- GAP program, which is in existence Sri Lanka since 2015. Insufficient production, scattered producers, non-continuous supply, poor marketing channels, and low</p>
---	--

	<p>consumer awareness on GAP-certified products have become major issues as at present that required immediate solutions. At present there is a gap in market requirement and the supply of GAP-certified products. Hence, expanding the SL-GAP program among the FPOs under the ASMP would provide quality agriculture produce at a lower price while providing high income for the SL-GAP farmers.</p> <p>Strengthening of seed and planting material production facilities of HORDI at Gannoruwa, seed farm at Kundasale and University Experimental Station at Dodangolla will be a sustainable solution for the continuing of modern technologies that are introduced to the farmers by ASMP. Therefore, launching of capacity building program at these institutions to enhance the quality assurance of agricultural products is an essential and mandatory requirement of the agriculture sector modernization.</p> <p>Agriculture in Sri Lanka is one of the sectors which has been given a prominent focus for a number of years where paddy cultivation is identified as the most important crop. However, over the years the horticulture sector which includes fruits and vegetables has been gaining significant prominence and is a major contributor to the overall agriculture sector. Sri Lanka's ability to grow a variety of fruits and vegetable crops year-round under different climatic zones has led to a keen interest both locally and internationally to further develop this sector due to the identified high potential. In recent times the potential and interest for the horticulture sector has intensified due to government policy and the Covid pandemic. The present domain of the horticulture industry in Sri Lanka is evolving and includes cultivation, plant propagation, breeding of plants, production of crops, plant physiology as well as biochemistry and genetic engineering. The use of biotechnology is also poised to enter the domain of horticulture in Sri Lanka.</p> <p>Sri Lanka's smallholder farmers are faced with increasing risks related to the impacts of climate factors, socio-economic conditions, technology transfer issues. Risk has always been a factor for farmers, and there are many traditional methods of risk management that have been developed over generations, including cultivation techniques, crop varieties, irrigation systems, soil management, natural insect and pest control, integrated crop-livestock systems, and livelihood diversification.</p> <p>In addition to employing these traditional methods, farmers can benefit from technology and modern knowledge to better manage their risks on different levels, such as agro-meteorological advisory, climate projections, crop insurance schemes, value addition, micro-irrigation, mechanization, or reduction of post-harvest losses.</p> <p>As a holistic approach, enhancing farmer capacities, agricultural input supply, and value chain is a sustainable effort for the industry. Meantime, the enhancement of the DOA's capacity as the main project partner agency of the ASMP is a mandatory requirement that should be</p>
--	--

	<p>accelerated for the better performance of the agriculture sector development.</p> <p>The ultimate effort of the ASMP is to establish good agriculture practices (GAP) in the farming activities by introducing new technologies.</p> <p>Therefore, strengthening of the seeds and planting material production facilities of HORDI at Gannoruwa, Seed Farm at Kundasale and University Experimental Station at Dodangolla is considered an essential and timely need for quality assurance of agricultural products which can be utilized by other public and private sector agencies to enhance the safe food and good health of the people in Sri Lanka.</p>
<p>Purpose of the project (<i>What is going to be achieved by carrying out the project</i>)</p>	<p>The project will directly result the strengthening of planting material production facilities at HORDI- Gannoruwa, Seed Farm- Kundasale and University Experimental Station- Dodangolla. Ultimately, it gives the benefits to the farmers who have engaged in vegetable cultivation in the country. The following purposes will be achieved by implementing the subproject.</p> <ul style="list-style-type: none"> • Continuing research and development activities of horticultural; crops by HORDI and Faculty of Agriculture-University of Peradeniya and sharing technology and knowledge with local and foreign universities, agriculture schools, private agricultural firms, other academic centers, and stakeholders • Conducting development programs to transfer new technologies which are developed by the research divisions to the agriculture extension officers, vegetable farmers, students (School, School of Agriculture & University) Entrepreneurs in the private sector. • Improve the research extension linkage by coordinating research extension dialogue, technology demonstrations at farmer fields. Coordinating and testing of adaptability on research-proven technologies of HORDI at field level. • Transferring Technologies released by the Food Research Unit and the findings regarding the new disease identification and confirmation through molecular techniques to farmers and other stakeholders • Continuing to diagnose to identify the pest and diseases attacks, nutrient deficiency, and other challenges for the horticultural crop management. Giving recommendations and creating awareness of the stakeholders to overcome the issues. Meantime, conducts the analysis to identify the residual impacts of the agriculture inputs and the management activities. To achieve this objective HORDI carry out soil sample analysis, fertilizer sample analysis, compost analysis, water sample analysis, plant sample analysis, bio-efficacy testing of special fertilizer, training programs, quality analysis laboratory reports, research facilities, advising and consulting, and awareness programs are being conducted

	<ul style="list-style-type: none"> • Releasing new crop varieties- Continues research activities to release the high yielding, pest and diseases resistant, drought resistant and high food quality contains crop varieties. • Supplying quality seed and planting material to seed production farmers, private institutions, and other interested groups for multiplication. Through this program, hope to enhance the local seed supplying <p>The ultimate effort of the ASMP is to establish good agriculture practices (GAP) in the farming activities by introducing new technologies.</p>
<p>Alternatives considered (Different ways to meet the project need and achieve the project purpose)</p>	<p>There is no private sector program for conducting research and development activities in the country on horticultural crops. HORDI is the mandatory institution responsible for this service.</p> <p>Currently, HORDI does not have adequate facilities to support the horticultural crops planting material production since they have limited resources. Dissemination of new crops varieties to farmers/ growers needs additional trustworthy support from the outsider. Seed and Planting Material Production Center is the best-fitted government institute to undertake this task. HORDI has identified the seed production farm at Kundasale as the most appropriate institute out of 29 government seed production farms considering the geographical location and other existing collaboration programs.</p> <p>Even though there is private sector involvement in seed production, their services are very narrow and are limited to their own needs only. Hence, there is a gap to be filled and the government sector involvement is essential. The farmers keep trust in the government sector service since there is a trustworthy service and DOA has improved human capital to deliver the service.</p> <p>The faculty of agriculture is the leading academia in agriculture science in Sri Lanka. They have undertaken a remarkable responsibility for the agriculture sector development of the country. For more than seven decades, they have contributed to the sector by introducing modern technology through research activities and producing agriculture professionals in the country. The university experimental capacity has also been identified to be strengthened under ASMP.</p> <p>Therefore, ASMP together with DOA have identified the need for a subproject and decided to enhance the planting material production facilities through the capacity building program. Construction of controlled environment research facilities (Polytunnels) and automated polytunnels for the three institutions and rehabilitation of existing five greenhouses of HORDI are identified as the only alternative under this subproject since it gives the maximum output for the least investment.</p> <p>There is no alternative to be considered since there is well established system in the sector.</p>

D. PROJECT DESCRIPTION

Proposed Start Date (Duration)	March 2022 (02 Months)
Proposed completion Date	April 2022
Estimated total cost	SLRs 72.90 Mn
Present Land Ownership	HORDI- Gannoruwa and Seed Farm- Kundasale are located in Gannoruwa on the state land that is under the purview of the DOA. The university experimental station is located on the land that belongs to University of Peradeniya and vested to the Faculty of Agriculture.
Description of the Project <i>(With supporting material such as maps, drawings, etc. attached as required)</i>	The following activities are included as the civil works of the subproject at three different locations. <ol style="list-style-type: none"> 1. Rehabilitation and upgrading of 5 Nos of existing Greenhouses at Planting Materials Production Unit, HORDI- Gannoruwa 2. Construction of 10 Nos of Semi-Automated Poly Tunnel for Planting Materials Production Units at University Experimental Station- Dodangolla, Seed Farm-Kundasale and HORDI-Gannoruwa. 3. Construction of 01 No of Fully Automated Poly Tunnel for Planting Materials Production Unit at HORDI, Gannoruwa <p>The design drawings of subproject activities are annexed in Annex 4.</p>
Project Management Team	A Project Management Unit (PMU) has been established under the Ministry of Agriculture to implement the proposed project activities. Contact Persons: <p>Project Director Agriculture Sector Modernization Project Ministry of Agriculture No. 123/2 Pannipitiya Road, Battaramulla Tel: +94 112 877 550, Fax: +94 112 877 546 Email: projectdirectorasmp2@hotmail.com Web: https://www.asmp.lk/</p> <p>Environmental and Social Safeguards Specialist Agriculture Sector Modernization Project Ministry of Agriculture No. 123/2 Pannipitiya Road, Battaramulla Tel: +94 112 877 550, Fax: +94 112 877 546 Email: sanjayadms@hotmail.com Web: https://www.asmp.lk/</p> <p>Nature of Consultations and Inputs Received Consultations with Environmental and Social Safeguard Specialist/ PMU and field visits to the project site.</p>

E. DESCRIPTION OF PROPOSED SUBPROJECT ACTIVITIES

<p>Existing Condition of the Facilities</p>	<p>1. <u>Horticultural Crops Research and Development Institute (HORDI)</u></p> <p>The HORDI is a de-centralized organization. The central administration has been established at the head office in Gannoruwa but island wide research and development activities and the services are delivered by the HORDI in addition to services provided by the regional sub units. There are ten sub units comes under HORDI,</p> <ol style="list-style-type: none"> 1. Regional Agriculture Research & Development Centre – Bandarawela 2. Agricultural Research Station -Seetha Eliya 3. Agriculture Research and Development Center -Girandurukotte 4. Agriculture Research Station -Kalpitiya 5. Agriculture Research Station -Thelijjawila 6. Adaptive Research Unit – Wagolla 7. Adaptive Research Unit – Wariyapola 8. Adaptive Research Unit – Thibbatumulla 9. Adaptive Research Unit – Thabbowa 10. Food Research Unit – Gannoruwa <p>The HORDI is a prime research and development institute among the agricultural research stations of the country. It consists of all the sections that want to continue the improved research and development activities at a higher standard level. There are Seven Sections that comes under HORDI,</p> <ol style="list-style-type: none"> 1. Plant Breeding Division 2. Plant Pathology Division 3. Agronomy Division 4. Entomology Division 5. Soil and Plant Nutrition Division 6. Food Contaminant Analytical Division 7. Extension and Communication Division <p><u>Plant Breeding Division</u></p> <p>Division of plant breeding is employed in developing new vegetable varieties to cope with the market demand, consumer preference, climate change, and biotic & abiotic stresses using conventional and modern breeding tools. In achieving the above goals current research and development activities are being focused on the following area.</p> <ul style="list-style-type: none"> • Germplasm collection, evaluation, and selection for rational utilization of germplasm in crop improvement program of vegetable crops • Development of high-yielding vegetable varieties in cooperated with other preferable quality characters suitable for diverse environments. • Development of climate-smart varieties to mitigate climate change
--	---

- Development of pest and disease-resistant varieties to reduce the usage of chemicals in vegetable cultivation and ensure sustainable agriculture industry

The services delivered by the plant breeding division;

- Production of new vegetable varieties
- Breeder seed production of new varieties produced
- Awareness of farmers
- Training Programs (Farmers, Students, Officers)
- Contributing to Technology Programs (Radio, Television)
- Conducting research on imported seeds and finding out whether they are suitable for cultivation in the country.
- Awareness on techniques (Tissue Culture, Mushrooms)
- Providing planting material

Plant Pathology Division

The Plant Pathology division is responsible for identification of plant diseases, development of integrated disease management packages, fungicides screening, seed and plant health test, advisory service for disease control. New technologies are disseminated by training classes, plant clinics, leaflets, and research papers. The plant pathology division provide following service to the sector;

- Disease Diagnosis and Advisory Service
- Providing Teaching and Training Facilities
- Participate as Resource Persons

Disease identification is one of the major tasks assigned for this division. The plant pathology division of HORDI continues a remarkable duty in prior identification of pest and disease attacks' outbreaks and taking necessary actions to mitigate the vulnerable situations. Currently, the division has been modified to detect and confirm diseases through molecular biology techniques. Using this technique, the following new diseases were traced during the recent period;

1. **Aloe vera** soft rot (*Dickeya chrysanthemi*)
2. Target spot of **tomato** (*Corynespora cassiicola*)
3. *Corynespora* blight of **cucurbits** (*Corynespora cassiicola*)
4. Bacterial wilt of **cucurbits bean and weed** hosts (*Ralstonia solanacearum*)
5. *Fusarium* crown and root rot of **tomato** (*Fusarium radices-lycopersici*)
6. **Moringa** (Drumstick) diseases (*Drechelera* sp.) and (*Lasiodiplodia theohromae*)
7. **Tomato** canker disease (*Clavibacter michiganensis* subsp. *Michiganensis*)
8. **Watermelon** fruit blotch (*Acidovorax avenae*)

Agronomy Division

The main activity of the division is conducting agronomic research with the propound objective of increasing the production and productivity of vegetables, ornamentals, and root and tuber crops.

Through the developing agronomic technologies, the division is working to minimize the gap between potential and actual yield and quality of the crops and increase the overall vegetable and root & tuber crops production of the nation.

The division offers a different kinds of agronomy related services to the public, mainly on vegetables, flowers, and root and tuber crop cultivations and home gardening.

Services

- Provision of planting material and seeds of traditional - varieties for farmers that requested.
- Solving farmers problems on vegetables
- Participating for research extension dialogues requested by extension divisions.
- Participating and conducting lectures for pre-seasonal training programs

Entomology Division

The main activity of the division is conducting research and development activities related to the diagnosis and management of pests in vegetables and root crops

Soil and Plant Nutrition Division

Division of Soil and Plant nutrition mainly conducts research on soil fertility, plant nutrient management, organic farming, environmental pollution, food safety, and soil microbiology and soil physics relevant to vegetables. The division promotes farmers for soil test-based fertilizer application in the food crop sector. Further provides analytical services on request for soil, plant, water, and chemical fertilizers, compost, and manures and offers advice on their use of them. The division also undertakes training programs on soil fertility and plant nutrition, correct use of fertilizers, organic farming with special reference to nutrient and soil management, and other related topics for farmers, students, extension officers, and the interested public. Students from universities and other government and private institutions are being trained for the laboratory analytical works of organic farming. The division consists of laboratories for soil, fertilizer, plant, water analysis, and Soil microbiology. These are equipped with required instruments to measure essential soil chemical, physical and microbial properties. Soil and fertilizer laboratories are accredited for analyzing pH, EC. Phosphorus, Potassium, Micronutrients (Fe, Cu, Mn, Zn), secondary nutrients (Ca, Mg), total trace metals (As Cd, Cr, Pb, Fe, Cu, Mn, Zn) in soil and total nitrogen, total and water-soluble phosphorous, total potassium, moisture, and heavy metals (Fe, Cu, Mn, Zn,

Pb, Cd, Cr, As) in chemical fertilizer. The following services are provided by the division;

1. Soil Sample Analysis
2. Chemical Fertilizer Sample Analysis
3. Compost Analysis
4. Water Sample Analysis
5. Plant Sample Analysis
6. Bio efficacy testing of special fertilizers
7. Undertake university students' researches
8. Training Programs (school and University)
9. Training Program (Diploma Students)
10. Training on Organic Farming

The main activities that are undertaken by the division are as follows;

- Improve fertilizer use efficiency by introducing new technology.
- Promoting of organic agriculture
- Introduction of compost preparation technology
- Promotion of soil and plant test based fertilizer recommendation
- Detection of heavy metals in environmental samples
- Testing of micro-nutrient in plant samples
- Conducting research on soil fertility and plant nutrient management, soil physics and soil microbiology

Food Contaminant Analytical Division

Main scope of this division is carrying out analysis on food contaminants. Accordingly, residue analysis for pesticide residues and trace elements in food is being continued at the two separate laboratories. In addition, testing for pesticide formulations are also carried out at a separate laboratory division.

Considering the capacity of the laboratory, per day nearly forty (40) samples can be analyzed as for pesticide residue analysis or elemental analysis. Nearly seventy pesticides can be analyzed as pesticide residues while 13 elements can be analyzed as trace elements including most toxic elements of Arsenic (As), Mercury (Hg), Cadmium (Cd) and Lead (Pb). Nearly 85 equipment are located at the laboratory including high-end equipment of LC-MS/MS, GC-MS, ICP-MS, HPLC, FTIR and two GCs. The following services are produced by the division

- Pesticide residue analysis in food items of fruits, vegetables, rice and water
- Elemental analysis in food items of fruits, vegetables, rice and water
- Elemental analysis in pesticides as impurities
- Conducting under graduate/student training and research studies.
- Quality analysis for pesticides.

Extension and Communication Division

Research proven new findings and improved varieties in related to the vegetables and tuber crops are disseminated to different groups of people including students, government and non-government organization, farmers and entrepreneurs to enhance production and productivity of vegetables and tuber crops. Coordinating, the industrial training program for students under Diploma and University. Research extension linkage is developed by organizing and coordinating demonstration on new technologies and conducting and coordinating research extension dialogue. Division is responsible for compilation and preparation of annual research report. The activities performed by the division;

- Timely editing and updating of technical leaflets
- Technology dissemination by telephone calls, radio program, TV Program, paper articles, exhibitions, workshops, training program and demonstration
- Coordinating the research and extension linkage by conducting and coordinating research extension dialogue.
- Coordinating industrial training program for the undergraduates and diploma students.
- Participate for PTWG and DTC with new findings to extension officers at field level and identified the priority issues and problems for research.
- Coordinating exhibitions

The main service of the division is conducting advisory services at farmer premises by visiting and at the office



Figure 9: Land identified to construct the polytunnels



Figure 10: The greenhouses identified to rehabilitate

2. Seed and Planting Material Production Farm- Kundasale

The seed production farm includes a polytunnel area, open field, and Deputy Director (Seed) office complex. Presently, the farm division gets seeds and planting material from HORDI and cultivates in polytunnel/control environment tunnels to avoid cross-pollination and produces quality basic seeds for distribution among the farmers and the private farms.

The seed farm has constructed polytunnels to produce the hybrid seed and cultivation area used to produce Open Pollinated Varieties (OPV) seed. The seed farm is planning to construct new polytunnels to increase hybrid seed production and improve the underutilized land area for OPV seed production.



Figure 11: Existing polytunnels



Figure 12: Area identified to construct new polytunnels under ASMP

There are 5 earthen ponds within the farm. Seed farm irrigates the crops using these earthen ponds.



Figure 13: An earthen pond that uses for irrigation

3. University Experimental Station- Dodangolla

This station has facilities for residential training programs, agricultural demonstrations, and research trials. Students of the University of Peradeniya and students from other Sri Lankan and foreign universities conduct their Bachelor, Master, and Doctoral field experiments at this station. In addition, leading local and foreign private organizations use the unit for research purposes. Very importantly, the unit offers very good facilities for academia of the University of Peradeniya to conduct research programs. The station gives treasured research opportunities for undergraduate and postgraduate levels. The main research areas are.;

- Crop Physiology and Agronomy based research
- Protected Culture and Organic Agriculture
- Site-specific soil management
- Land use planning
- Spatial variability of soil properties

Nearly 79 ha (195 acres) extent farmland has separately allocated spaces for the training & research, facilities (for researchers and service seekers), production units, and biodiversity & plantation fields. As well farm conducts training programs in,

- Mushroom Cultivation
- Protected Culture
- Tissue Culture
- Organic Farming and
- Farm Machinery, on the request of outside organizations, farmer groups etc.

This station has residential facilities to accommodate approximately 60 students. The student hostel consists of three dormitories to accommodate males and females separately. Within this hostel premises there is a lecture hall with adequate facilities and lodging facilities, meals and recreation facilities.

A sophisticated glass house, two poly tunnels with different levels of shading and net houses are available for research and training activities.

A tissue culture laboratory was established in 2008 for training and production requirements. This laboratory consists of all instruments to practice low-cost tissue culture techniques. Presently, the laboratory is being used to produce Anthurium and Banana plantlets for sale.

The plant nursery has all the facilities for good management of plants and for plant propagation practical training. These include facilities to conduct training programs on budding, grafting, layering, and other plant propagation techniques using well-trained and skilled staff. This nursery supplies sufficient numbers of quality annual and perennial horticultural crop plants to the plant sales center at the Faculty of Agriculture of the University at Peradeniya and sells the propagules on site at the farm.

The mushroom unit was developed in 2009 to enhance the knowledge of mushroom cultivation of undergraduate students and external trainees. The unit is offers practical knowledge on all the techniques of oyster mushroom production. It encourages trainees to initiate mushroom cultivation as self-employment programs. In addition, this unit provides research facilities for undergraduate students and academia of the university.

There is a land reserved for organic agriculture experiments. This field has not received any agro chemicals for the last 10 years. The unit has a compost production unit, which is used for practical classes by students and for research.

Approximately 25% of the unit is reserved to commercial vegetable and fruit production. A wide range of vegetables and fruits such as mango, banana, jack fruit, Anona and pomegranate are grown on this land.

This station has a high degree of bio diversity, with about 150 species of plants within its premises. This is an added bonus, which is used extensively for student practical. The experimental unit offers a unique opportunity for student training, research and demonstrations.

	<p>Perennial crops, principally Teak, Coffee and Coconut cover approximately 50% of the land area of the farm.</p> <div style="display: flex; justify-content: space-around;"> <div data-bbox="470 237 943 607"> </div> <div data-bbox="954 237 1426 607"> </div> </div> <p>Figure 14: Land identified to construct new polytunnels</p> <p>Figure 15: Ongoing research at a polytunnel</p> <p>DOA and the University of Peradeniya annually allocate funds for the recurrent expenditures to undertake the services and the research activities undertaken by these three institutions but there are low allocations for the capital investment. ASMP and DOA together conduct the consultation sessions with relevant officials and identified to need of strengthening the HORDI, Seed Farm and University Experimental Station’s services through capacity building component of ASMP</p>
<p>2. Other factors</p>	
<p>Solid waste</p>	<p>The crop residuals and organic waste generated in these institutions are properly disposed of using safety & health precautions to keep the hygienic conditions at the research stations and the farmlands. The agrochemical waste, lab chemical waste, and used chemical containers are kept in separate safe stores established in the centers until proper disposal. This store is being monitored by special audit teams of the relevant authorities (DOA and University) timely whether there is quantity and process are going properly. This is a special and important process observed during the screening process. Further, there is no possibility to contaminate the substances of chemical waste with the environment sensitive areas, community or staff of the research centers since these stores are located beyond the residential areas, community gathering locations and environmental sensitive places.</p> <p>The university/DOA select a contractor who has the facilities for the insulation of this waste at higher temperatures (through Cement Kiln Co-processing) as an approved and appropriate method. Most often, the cement factories have been selected as the qualified contractor for this job. This process is being monitored by the university audit team timely whether there is quantity and process are going properly.</p>
<p>E-Waste Management Process</p>	<p>The total solution of the e-waste disposal consists of three main pillars. They are E-Waste Collection, E-Waste Logistics, and E-Waste Dismantling. During the e-waste collection, segregation is the most important step that helps to decide the disposal system. The segregation of the waste should be done at the place of origin and research stations will segregate and store their e-waste in the safe storage room. The CEA has introduced the E-Waste</p>

disposal system to Sri Lanka when it became a national issue. Simultaneously, they have introduced the Licensed E-Waste collectors to manage the logistics and the dismantling steps of the waste disposal process. The research stations have a responsibility to hand over their e-waste to the licensed waste collector timely. The list of CEA licensed E-Waste collectors is annexed as Annex 6. Based on the type of e-waste, following disposal systems have been identified for the proper management.

SN	Type of waste	Disposal System
1	Printed Circuit Board / Core Waste	Exported for Recycling
2	Plastic Waste	Redirected to Recyclers
3	Wire Waste	Redirected to Recyclers
4	Metal Waste	Redirected to Recyclers
5	Unrecyclable Waste	Disposed of through Cement Kiln Co-processing

F. DESCRIPTION OF THE EXISTING ENVIRONMENT

1. PHYSICAL FEATURES – ECOSYSTEM COMPONENTS	
<p>Topography and terrain</p>	<p><u>1. Horticultural Crops Research and Development Institute (HORDI)</u> Geologically, the Gannoruwa area belongs to the Highland Complex of Sri Lanka and the elevation is below 600m AMSL. The site of the proposed subproject is located at Gannoruwa East in Yatinuwara Divisional Secretary Divisions in Kandy District. Kandy is surrounded by a triangular mountain range, namely the Hantana and Knuckles Mountain ranges. The elevation of these entrances is approximately 450 m in the North side (A 10 road), 520 m on the Eastern side (A 26 road), 580 m Southern side (B 39 road), and 530 m Western directions (A1 Road) respectively.</p> <p>The proposed project site is located within the wet zone of the country. The topography of the project area is characterized by steep dip slopes towards west and south, and steep hilly terrain towards north and east.</p> <p>The project site falls into Wet Zone Mid Country of Sri Lanka and the features of this area are WM2bAgro-ecological zone.</p> <p><u>2. Seed and Planting Material Production Farm- Kundasale and University Experimental Station- Dodangolla</u> Geologically, the Gannoruwa area belongs to the Highland Complex of Sri Lanka and the elevation is below 500m AMSL. The seed farm and university experimental station are located at Kundasale and Dodangolla respectively. Both sites belong to the Kundasale DS division in Kandy District. The distance between the two institutions is about 1.5km and they are located bounded to A26 road (which connects Kandy-Padiyathalawa).</p> <p>The seed farm and university experimental station belong to the mid-country Intermediate zone. The topography of the project area is characterized by steep hilly terrain towards north and east.</p> <p>The project sites fall into Intermediate Zone Mid Country and the features of the area is IM3 Agro Ecological Zone</p>
<p>Climate and Meteorology</p>	<p><u>HORDI- Gannoruwa Area</u> Climatically the area belongs to Mid Country Wet Zone and the average temperature varies between 22.1°C and 24.7°C. The zone receives annual rainfall more than 2,500mm and average 2,950mm. Relative Humidity varies from 74% during the day to 84% at night.</p> <p><u>Kundasale Area</u> Dodangolla and Kundasale areas belong to Mid Country Intermediate Zone and the average temperature is 24.5°C and maximum and minimum is 28°C and 19°C respectively. The average annual rainfall varies from 2,200 mm to 2,900 mm and average 2400mm. Relative Humidity varies from 70% during the day to 90% at night</p>
<p>Soil (type and quality)</p>	<p><u>HORDI- Gannoruwa Area</u> Riverbanks consist of slightly weathered to fresh bedrock overlying with thick residual and colluvium overburden materials. Intake is planned along the right bank of the river. The geological soil type of the proposed channeling area is a mixture of residual and colluvium soils which has a varying thickness from</p>

	<p>place to place. Bedrock exposures and a few boulders can be observed at places within the stream. The soil type of the area is reddish brown latasolic soil with dissected hilly and rolling terrain.</p> <p>The area is identified as a landslide-prone area as per the National Building Research Organization-2004 Sri Lanka.</p> <p><u>Kundasale Area</u></p> <p>The soil type of Dodangolla and Kundasale area is Immature Brown Loams, Reddish Brown Latazolic soils and Reddish-Brown Earths with dissected hilly and rolling terrain.</p> <p>The Kundasale area is identified as landslide-prone area as per the National Building Research Organization-2004 Sri Lanka</p>
<p>Surface water (Sources, distance from the site, local uses and quality)</p>	<p><u>HORDI- Gannoruwa Area</u></p> <p>The project area lies adjacent to the Mahaweli river and it is the only surface water body located in the vicinity of the project area.</p> <p>Uses:</p> <p>The local people use the river water to meet some of their domestic needs, such as washing, bathing, etc. No irrigated lands are noted within the project area and water extraction for irrigation purposes is negligible.</p> <p>In the vicinity of the project area, surface water bodies seem not abundant apart from the Mahaweli River and Meda Ela.</p> <p>Quality: At present, there is no detailed background information on surface water quality in these water bodies apart from a few studies done in the past by several organizations. The project area lies close to the Mahaweli river and it is only surface water body located in the vicinity of the project area.</p> <p><u>Kundasale Area</u></p> <p>The seasonal stream and earthen ponds are the only surface water bodies located in the vicinity of the project area.</p> <p>Uses:</p> <p>The local people use the seasonal streams and earthen ponds to meet their irrigation, washing, needs and for animal washing, etc.</p> <p>Quality: At present, there is no detailed background information on surface water quality in these water bodies.</p>
<p>Ground water (Sources, distance from the site, local uses and quality)</p>	<p><u>HORDI- Gannoruwa Area</u></p> <p>The groundwater table is relatively shallow in areas close to the river. However, due to the sloping terrain, the groundwater table lies fairly deep in hilly areas. Houses located in the valley areas, use shallow well water for domestic consumption; however, use of such wells is not widespread within the project area due to the availability of pipe-borne water. Most of the residents in the area use pipe-borne water for consumption, but their old wells are still in use for purposes such as bathing and washing.</p> <p>The quality of groundwater present in this area is moderate in condition and use for drinking, washing/ bathing, and cultivation activities.</p> <p><u>Kundasale Area</u></p>

	<p>Due to the sloping terrain, the groundwater table lies fairly deep in hilly areas. Houses located in the valley areas, use shallow well water for domestic consumption; however, use of such wells is not widespread within the project area due to the availability of pipe-borne water. Most of the residents in the area use pipe-borne water for consumption, but their old wells are still in use for purposes such as bathing and washing.</p> <p>The quality of groundwater present in this area is moderate in condition and use for drinking, washing/ bathing, and cultivation activities</p>
Air quality (Any pollution issues)	Any major pollution source near the Gannoruwa and Kundasale areas are not recorded
Noise	No any noise pollution sources in the vicinity of the stations.
2 ECOLOGICAL FEATURES – ECOSYSTEM COMPONENTS	
Vegetation (Trees, ground cover, aquatic vegetation)	<p><u>HORDI- Gannoruwa Area</u></p> <p>The proposed project area belongs to the WM2b Agro-ecological Zone map of Sri Lanka. No natural vegetation/habitats exist in and around the proposed project area except the river and its disturbing riverside vegetation. The whole land belongs to HORDI except the built-up area is used for the cultivations and to establish the propagation houses (Polytunnels, glasshouses, net houses, etc.). The HORDI land is surrounded by the government-owned land occupied by the many government agencies and most of these institutions are the DOA affiliated institution. Government institutions have used the land to establish their office premises building, and cultivations (use for research and model farming activities). The balance part of the land is scrublands that are covered with shrubs, grasses, etc. The area used for the different government institutions is surrounded by privately owned land but no agricultural lands are observed. All privately owned lands are residential or commercial. The residential land consists of a house and a home garden. The Kandyan Home Garden (KHG) is prominent vegetation as well as landscaping model observed in the area.</p> <p>KHG model can be observed in Kandy and adjacent districts, such as Badulla, Kegalle, Kurunegala, Matale, Nuwara Eliya, and Rathnapura. This area largely falls in the wet zone of Sri Lanka but occasionally in the intermediate zone, where the climate and environment support the luxurious growth of perennial trees. The area consists of deep soil (i.e., reddish-brown latasolic, immature brown loam, and red-yellow podzolic soils). The rainfall is year-round, sufficient to meet the evaporation demand of the atmosphere, with a distinct dry spell of one to two weeks that triggers the flowering of perennial species. KHGs are considered a result of farmers’ conception, investment, and long-term planning. The main components (tree categories) of KHG are ornamental, medicinal, spices, fruits, food, fuel, and timber. Livestock is also an important part of the KHG. The common flora species observed in the area are <i>Mangifera zeylanica</i>- Atemba, <i>Durio zibethinus</i> Murr. - Durian, <i>Artocapus heterophyllus</i>- Jackfruit, <i>Artocarpus nobilis</i>- Waldel, <i>Musa</i> spp. L. Kesel, <i>Psidium guineense</i>- Cheena pera, <i>Psidium montane</i>- Embulpera, <i>Persea americana</i>- Avacardo, <i>Eriobotrya japonica</i>- Japan batu, <i>Nephelium lappaceum</i></p>

	<p>L. Rambutan, Citrus spp., <i>Theobroma cacao</i> L. Cocoa, <i>Lantana camara</i> L.- Gandapana, <i>Syzygium aromaticum</i>- Clove, <i>Myristica fragrans</i>- Sadikka, <i>Piper nigrum</i> – Pepper.</p> <p><u>Kundasale Area</u></p> <p>The proposed project area belongs to the IU3 Agro-ecological Zone map of Sri Lanka. The university experimental station is surrounded by the private home gardens that are mostly like as Kandyan home garden that is described above. There is distinguish change in vegetation than above since the area belongs to the IM3 Agro ecological Zone. No natural vegetation / habitats exist in and around the proposed project area Scrub lands are covered with shrubs, grasses etc. Perennial crop such as Jack, coconut and other plants of fruit varieties could be seen in the project study area. There are Kumbuk (<i>Terminalia arjuna</i>), Kottamba (<i>Terminalia catappa</i>), <i>Tabebuia rosea</i>, Amba (<i>Mangifera indica</i>), Pulun (<i>Ceiba pentandra</i>) trees. The whole land belongs to Dodangolla farm. Human settlement cannot be seen immediate vicinity of the project site except the buildings belongs to the farm</p>
Presence of wetlands	No wetlands present in the area adjacent to research station
Fish and fish habitats	Mahaweli river and open water body, Kandy Lake, irrigation canals, earthen pond and seasonal streams are water bodies that are ideal for fish habitat and also found with freshwater fish varieties.
Birds (<i>waterfowl, migratory birds, others</i>)	<p>The Gannoruwa and Kundasale area is closer to the waterways (Mahaweli river) and agricultural lands and there is a possibility of recording bird species in these habitat types.</p> <p>The most common birds species found in and around the project locations are, <i>Orthotomus sutorius</i> (Common Tailorbird), <i>Turdoides affinis</i> (Yellow-billed Babbler), <i>Corvus splendens</i> (House Crow), <i>Acridotheres tristis</i> (Common Myna), <i>Eudynamis scolopacea</i> (Asian Koel), <i>Dicaeum erythrorhynchos</i> (Pale-billed Flowerpecker), <i>Accipiter badius</i> (Shikra), <i>Spilornis cheela</i> (Crested Serpent Eagle), <i>Nectarina lotenia</i> (Loten's Sunbird), <i>Pycnonotus cafer</i> (Red-vented Bulbul), <i>Halcyon smyrnensis</i> (White-throated Kingfisher), <i>Bubulcus ibis</i> (Cattle Egret), <i>Columba livia</i> (Rock Pigeon), <i>Streptopelia chinensis</i> (Spotted Dove), <i>Centropus sinensis</i> (Greater Coucal), <i>Dicrurus caerulescens</i> (White-bellied Drongo), <i>Hirundo daurica</i> (Red-rumped Swallow), <i>Copsychus saularis</i> (Oriental Magpie Robin).</p>
Presence of special habitat areas (<i>special designations and identified sensitive zones</i>)	<p>Udawattakele sanctuary and Gannoruwa forest reserve presence as a special habitat area are reported in surrounding area, but not within the 2 km radius of the HORDI premises and Kundasale area.</p> <p>According to environment sensitive areas map of CEA, no any environmental sensitive area recorded in the close proximity of the project site</p>
3 OTHER FEATURES	
Residential/Sensitive Areas	All farming areas are located separately from the other institutions and they do not impact sensitive areas such as hospitals, schools, etc..

(E.g., Hospitals, Schools)	
Archaeological resources (Recorded or potential to exist)	The HORDI and seed farm Kundasale are located on DOA owned lands and Dodangolla experimental station is located in university owned land. There is no archaeological or Physical Cultural Resource (PCR) to record or potential to exist.

G. SOCIO-ECONOMIC ENVIRONMENT

1. Stakeholders and Public consultation																																																	
Stakeholders' engagements	<p>The Department of Agriculture is the main project partner agency of this subproject. The staff of the HORDI, Seed and Planting Material Development Center (SPMDC), and Agriculture Faculty (University of Peradeniya) jointly prepared their capacity needs and submitted them to the ASMP. Several discussions were undergone to finalize the subproject activities between the HORDI, SMPDC, university staff and the ASMP. For more transparency, the relevant institution staff were represented the technical evaluation committee of this subproject.</p> <p>The ASMP PMU staff conducted site visits, consultations with DOA's officials during subproject identification and designing stages.</p> <p style="text-align: center;">Table 1: Responsible Officers in HORDI Project Activities</p> <table border="1"> <thead> <tr> <th>SN</th> <th>Name</th> <th>Designation</th> <th>Contacts</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Dr. (Ms.) S.K. Wasala</td> <td>Additional Director General of Agriculture (Research)-DOA</td> <td>samanthiwasala@gmail.com</td> </tr> <tr> <td>2</td> <td>Prof. K.W.L.K. Weerasinghe</td> <td>Senior Lecturer- Faculty of Agriculture, University of Peradeniya</td> <td>0714462995</td> </tr> <tr> <td colspan="4">HORDI- Gannoruwa</td> </tr> <tr> <td>3</td> <td>Ms. W.A.P.G.Weeraratna</td> <td>Director/ HORDI</td> <td>gethweerarathna@yahoo.com</td> </tr> <tr> <td colspan="4">Plant Breeding Division</td> </tr> <tr> <td>4</td> <td>Ms.N.L.A.T.S. Nanayakkara</td> <td>Head of the Division Assistant Director of Agriculture (Research)</td> <td>subodhinit@gmail.com</td> </tr> <tr> <td>5</td> <td>Ms. H.M.P.S. Kumari</td> <td>Assistant Director of Agriculture (Research)</td> <td>pabakumari68@yahoo.com</td> </tr> <tr> <td>6</td> <td>Ms. H.M.V.T.Welegama</td> <td>Assistant Director of Agriculture (Research)</td> <td>tharanganiwelegama@gmail.com</td> </tr> <tr> <td>7</td> <td>Ms. R.G.S.Iroshani</td> <td>Assistant Director of Agriculture (Research)</td> <td>shyaliiroshani@gmail.com</td> </tr> <tr> <td>8</td> <td>Ms. N.B.U.Dissanayaka</td> <td>Assistant Director of Agriculture (Research)</td> <td>bhagyadissanayaka@ymail.com</td> </tr> <tr> <td colspan="4">Pathology Division</td> </tr> </tbody> </table>	SN	Name	Designation	Contacts	1	Dr. (Ms.) S.K. Wasala	Additional Director General of Agriculture (Research)-DOA	samanthiwasala@gmail.com	2	Prof. K.W.L.K. Weerasinghe	Senior Lecturer- Faculty of Agriculture, University of Peradeniya	0714462995	HORDI- Gannoruwa				3	Ms. W.A.P.G.Weeraratna	Director/ HORDI	gethweerarathna@yahoo.com	Plant Breeding Division				4	Ms.N.L.A.T.S. Nanayakkara	Head of the Division Assistant Director of Agriculture (Research)	subodhinit@gmail.com	5	Ms. H.M.P.S. Kumari	Assistant Director of Agriculture (Research)	pabakumari68@yahoo.com	6	Ms. H.M.V.T.Welegama	Assistant Director of Agriculture (Research)	tharanganiwelegama@gmail.com	7	Ms. R.G.S.Iroshani	Assistant Director of Agriculture (Research)	shyaliiroshani@gmail.com	8	Ms. N.B.U.Dissanayaka	Assistant Director of Agriculture (Research)	bhagyadissanayaka@ymail.com	Pathology Division			
SN	Name	Designation	Contacts																																														
1	Dr. (Ms.) S.K. Wasala	Additional Director General of Agriculture (Research)-DOA	samanthiwasala@gmail.com																																														
2	Prof. K.W.L.K. Weerasinghe	Senior Lecturer- Faculty of Agriculture, University of Peradeniya	0714462995																																														
HORDI- Gannoruwa																																																	
3	Ms. W.A.P.G.Weeraratna	Director/ HORDI	gethweerarathna@yahoo.com																																														
Plant Breeding Division																																																	
4	Ms.N.L.A.T.S. Nanayakkara	Head of the Division Assistant Director of Agriculture (Research)	subodhinit@gmail.com																																														
5	Ms. H.M.P.S. Kumari	Assistant Director of Agriculture (Research)	pabakumari68@yahoo.com																																														
6	Ms. H.M.V.T.Welegama	Assistant Director of Agriculture (Research)	tharanganiwelegama@gmail.com																																														
7	Ms. R.G.S.Iroshani	Assistant Director of Agriculture (Research)	shyaliiroshani@gmail.com																																														
8	Ms. N.B.U.Dissanayaka	Assistant Director of Agriculture (Research)	bhagyadissanayaka@ymail.com																																														
Pathology Division																																																	

9	Ms. W.A.P.G.Weeraratna	Agriculture Principal Scientist (Plant Pathology)	gethweerathna@yahoo.com
10	Ms. M.S.W.Fernando	Assistant Director of Agriculture (Research)	sobashinifernando@gmail.com
Agronomy Division			
11	Ms.D.P.Karunananda	Agriculture Principal Scientist (Agronomy)	dayani.karunananda@gmail.com
12	Ms.K.A.D.S.D. Kahadawaarachchi	Assistant Director of Agriculture (Research)	dilrukshi_sandya@ymail.com
13	Ms.K.H.S.T.Deshabandu	Assistant Director of Agriculture (Research)	khstdeshabandu@yahoo.com
14	Ms. H.M.P.T.K.Hettigedara	Assistant Director of Agriculture (Research)	hettigedara64@yahoo.com
Entomology Division			
15	Mr.S.S.Weligamage	Agriculture Principal Scientist (Entomology)	senaniweligamage@gmail.com
16	Mr. K.M.D.W.P. Nishantha	Assistant Director of Agriculture (Research)	wpnishantha@yahoo.com
17	Ms.P.H.Ranaweera	Assistant Director of Agriculture (Research)	ranaweerapra@yahoo.com
Soil and Plant Nutrition Division			
18	Ms. N.R.N. Silva	Principal Agriculture Scientist (Soil Science)	renukasilva@yahoo.com
19	Mrs. K.K.K. Nawarathne	Assistant Director of Agriculture (Research)	kkknawaratna@yahoo.com
Food Contaminant Analytical Division			
20	Ms.C.Magamage	Principal Agriculture Scientist (Analytical Chemistry)	champamgmg@gmail.com
21	Ms.P.W.Y. Lakshani	Assistant Director of Agriculture (Research)	jayayoshil@yahoo.com
Extension and Communication Division			
22	Ms.K.A.S. Thilakarathne	Assistant Director of Agriculture (Development)	arunisriya@gmail.com
Seed Farm- Kundasale			
23	Mr. K.D. Pushpananda	Director (Seed and Planting Material Development Center- Peradeniya)	0812 388122 0812 388608 pushpanandak@yahoo.com
24	Mr. W.M.I. Weerasekara	Deputy Director of Agriculture (Farm Development)	0715 347267 weerasekaradoa@gmail.com
25	Ms.Samanthi Anuruddhika Godigamuwa	Deputy Director (Seeds)	0716 037756
University Experimental Station- Dodangolla			
26	K.G.S.N. Amarasiri	Farm Manager	
Stakeholders' consultation	During the social and environmental screening process, the staff of DOA, University of Peradeniya, HORDI and SPMDC were consulted. Meantime ASMP has taken actions to conduct the stakeholders' consultation starting from the subproject identification stage up to finalizing the subproject's design. It was a good tool to maintain transparency among the stakeholders. Due to the impact		

of the fruitful consultation process undertaken by the ASMP, the DOA and University staff are well aware of the subproject activities and their objectives. Meantime, they have negotiated and decided the real requirements that they want to enhance the service of the institute

Table 2: Consultation outputs

Locations / Sub Units / Fields Visited	Participants with Designations	Matters Discussed
DOA- Peradeniya- 19.01.2022		
ADG (Research) Office, DOA	Dr. (Ms.) S.K. Wasala Additional Director General (Research)	Overall capacity building plan to be implemented with ASMP assistance
Faculty of Agriculture, University of Peradeniya- 19.01.2022		
Faculty of Agriculture	Prof. Buddhi Marambe Senior Professor	Requirement of Controlled Environment Research Facility (CERF)at University Experimental Station
	Prof. K.W.L.K. Weerasinghe Senior Lecturer	
HORDI Gannoruwa-19.01.2022		
Director Office, HORDI	Ms. W.A.P.G.Weeraratna Director/ HORDI	Proposed subproject activities
Analytical Laboratory (Pesticide residuals & Heavy metals)	Ms.P.W.Y.Lakshani, Assistant Director of Agriculture (Research)	<ul style="list-style-type: none"> • Routine functions of the lab • Overall environmental and social risks/impacts • Safety precautions that are implemented
	Ms. Chamila Vaidyaratne Research Assistant	
Sample Receiving Point	Mr.Asanga Panditharathna Sample receiving Officer	<ul style="list-style-type: none"> • Rehabilitation of existing greenhouses of the research station • Waste disposal
Plant Pathology Division	Ms.Kanchana Dissanayake, Programme Assistant	
	Ms.Shyamali Kohombange Research Assistant	
	Ms. Nishani Research Assistant	
	Ms.Nishadi Samarakoon Research Assistant	
	Ms.N.M.S.Maheshika Technical Assistant	
	Ms.W.Anurudhdhika Technical Assistant	
	Mr.R.W.Weerasekara Technical Assistant	
Soil & Plant Nutrition Division	Ms.Renuka Silva Principal Senior Scientist (Soil Science)	
Microbiology Laboratory	Ms.Kumudu Nawarathna, Assistant Director of Agriculture (Research)	
University Experimental Station, Dodangolla- 20.01.2022		
University Experimental Station	Mr.W.M.I.N.D.Abeysingha, Technical Officer	<ul style="list-style-type: none"> • Selected location for CERF establishment and its surrounding • Available water source for irrigation
Deputy Director (Seed)- Kudasale- 20.01.2022Seed		

	Deputy Director (Seed office and Farm)	Ms.Samanthi Godigamuwa DD (Seeds)	Anuruddhika	Requirement of CERF and proposed locations for establishment its socially & environmental suitability
--	--	-----------------------------------	-------------	---

H. SCREENING OF POTENTIAL ENVIRONMENTAL IMPACTS

SN	Screening question	Yes	No	Significance of the effect (Low, moderate, high)	Remarks
1	Are there any asset(s) that would be affected or acquired due to proposed project interventions such as: Land, Physical structure (Dwelling or commercial), Fruit trees/crops, Community Resource Property etc.?		√		Construction of controlled environment research facilities (polytunnels) and automated polytunnels will be done at HORDI, Seed Farm-Kundasale, and University Experimental Station-Dodangolla as the proposed civil works under the subproject. In addition, rehabilitation of 5 existing greenhouses at HORDI is also proposed as a civil work of the subproject. Proposed activities will slightly change the topography but no harm or impact to the natural drainage patterns of the locality. And the drainage activities are designed and implemented as an important part of the subproject activities. Debris/unsuitable excavated or clearing material will be disposed of properly
2	Is the sub-project area adjacent to (less than 500m) or goes through any of the following environmentally sensitive areas such as: Cultural heritage site, protected area and/or of its buffer zone, Conservation Forest, reserve or a sanctuary, Mangrove, Estuarine, Wetland, including paddy fields, water bodies, PCRs, Landslide-prone areas etc.?		√		No such sensitive areas are located in the vicinity of the subproject area
3	Will the project activities involve with Encroachment on historical/cultural areas: disfiguration of landscape by road embankments, cuts, fills and quarries?		√		No such impacts will be anticipated from the proposed civil works of the subproject
4	Will the project interventions involve with encroachment on or impact ecologically sensitive or protected areas?		√		No such impacts will be anticipated from the proposed civil works of the subproject

SN	Screening question	Yes	No	Significance of the effect (Low, moderate, high)	Remarks
5	Will the project interventions involve with alteration of surface water hydrology of waterways crossed by roads, resulting in increased sediment in streams affected by increased soil erosion at construction site?		√		No such impacts are anticipated but there may be temporary impacts. Such impacts will be mitigated through implementation of EMP
6	Will the project interventions involve with deterioration of surface water quality due to silt runoff and sanitary wastes from work-based camps and chemicals used in construction?		√		No such impacts will be anticipated from the proposed civil works of the subproject
7	Will the project intervention involve with Increased local air pollution due to rock crushing, cutting and filling works, and chemicals from asphalt processing?		√		No such activities are included as the subproject's activities
8	Will the project interventions involve with noise and vibration due to blasting and other civil works?	√		Low	The use of machines for civil works may make noise and vibrations but those impacts will be mitigated through the implementation of EMP. Further, civil works are taking place at the research stations and seed farm away from the residential area. Hence there is no possibility happen such impacts to the surrounding area.
9	Is there any possibility to create poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of communicable diseases from workers to local populations due project interventions?		√		No such impacts are anticipated
10	Will be possible to creation of temporary breeding habitats for mosquito vectors of disease?		√		No such impacts are anticipated
11	Will there be risk of accidents associated with the increased vehicular traffic due to project interventions?		√		The construction area is far away from the residential, commercial or any other occupants' areas. There is no any contact with the outsiders or activities

SN	Screening question	Yes	No	Significance of the effect (Low, moderate, high)	Remarks
12	Will the project activities increase the risk of water pollution from oil, greases and fuel spills, and other materials?		√		No such impacts are anticipated
13	Will the project activities involve with additional waste in water canals that may increase floods and waterlogs?		√		No such impacts are anticipated
14	Will the project activities involve with new/restored public areas/spaces that can be inundated in case of floods?		√		No such impacts are anticipated
15	Project interventions proposed to include Green infrastructure: Does sub-project include any of the following design aspects such as: Sri Lankan Guidelines of Green and Environmentally Friendly Building for the State Institutions (2016), Low energy materials, Reduced water use options, Energy optimization for lights, A/C etc. , Recycling and waste management, Increased human comfort, Enhanced landscaping, exterior or interior design, Site selection considering conservation of vegetation and wildlife?	√			During the operation of controlled environment research facility units, automated polytunnels and renovated greenhouses will be equipped with efficient watering systems. And proposed subproject indirectly affects water conservation. The structure constructed and renovated under the subproject do not require much energy for operation since they are mainly designed as transparent material for effective absorption of the sunlight. Further, there is a stormwater management system in each premises to avoid soil erosion.
16	Will the project interventions increase disaster Risk Management (DRM): such as: Floods, including coastal, Storm surges, Coastal erosion, Landslides, Land subsidence, Soil erosion and sedimentation, Rock falls, Cyclones, Droughts, Earthquakes, Salinization, salinity intrusion into drinking water sources, Forest fires, High winds, tornadoes etc., Epidemic and hazards related to environmental pollution, Vector borne diseases?		√		No such impacts will be resulted by this subproject
17	Will construction and operation of the Project involve actions which will cause physical changes in the locality (topography, land use, changes in water bodies, etc.?)	√		Low	The construction activities slightly effect on changes the topography of the area but proposed civil works have been designed

SN	Screening question	Yes	No	Significance of the effect (Low, moderate, high)	Remarks
					with appropriate drainage improvements. No change on land use and waterbodies by civil works.
18	Will the Project involve use, storage, transport, handling or production of substances or materials, which could be harmful to human health or the environment or raise concerns about actual or perceived risks to human health?		√		No such substances are involved with this subproject
19	Will the Project produce solid wastes during construction and/ or operation?	√		Low	The solid waste generated through the civil works should be properly managed by the contractor. The EMP will guide to proper disposal of the waste by the contractor. ASMP-PMU will timely monitor the process.
20	Will the Project release pollutants or any hazardous, toxic or noxious substances to air?		√		No such emission will be released
21	Will the Project cause noise and vibration or release of light, heat energy or electromagnetic radiation?	√		Low	Construction of polytunnels and proposed renovation activities may cause noise and vibration due to the machinery uses for the activities. Such impacts will be mitigated by implementing EMP. No impacts such as the release of light, heat, energy, or electromagnetic radiation are anticipated as a result of the subproject implementation or operation
22	Will the Project lead to risks of contamination of land or water from releases of pollutants onto the ground or into surface waters, groundwater or coastal wasters?		√		No such impacts are anticipated
23	Will the project cause localized flooding and poor drainage during construction Is the project area located in a flooding location?		√		No such impacts are anticipated

SN	Screening question	Yes	No	Significance of the effect (Low, moderate, high)	Remarks
24	Will there be any risks and vulnerabilities to public safety due to physical hazards during construction or operation of the Project?		√		No such impacts are anticipated. The construction area is a separate area from the other activities and the public
25	Are there any transport routes on or around the location which are susceptible to congestion or which cause environmental problems, which could be affected by the project?		√		No such impacts are anticipated
26	Are there any routes or facilities on or around the location, which are used by the public for access to recreation or other facilities, which could be affected by the project?		√		No such impacts are anticipated
27	Are there any areas or features of high landscape or scenic value on or around the location, which could be affected by the project?		√		No such impacts are anticipated
28	Are there any other areas on or around the location, which are important or sensitive for reasons of their ecology e.g., wetlands, watercourses or other water bodies, the coastal zone, mountains, forests, which could be affected by the project?		√		No such impacts are anticipated
29	Are there any areas on or around the location, which are used by protected, important or sensitive species of fauna or flora e.g., for breeding, nesting, foraging, resting, migration, which could be affected by the project?		√		No such impacts are anticipated
30	Is the project located in a previously undeveloped area, where there will be loss of green field land		√		No such impacts are anticipated. The lands are exclusively allocated for the relevant institutions only
31	Will the project cause the removal of trees in the locality?		√		Tree removal is not required
32	Are there any areas or features of historic or cultural importance on or around the location, which could be affected by the project?		√		No such impacts are anticipated
33	Are there existing land uses in or around the location e.g., home gardens, other private property, industry, commerce, recreation, public open space, community facilities, agriculture, forestry, tourism, mining or quarrying which could be affected by the project?		√		No such impacts are anticipated
34	Are there any areas in or around the location which are densely		√		No such impacts are anticipated

SN	Screening question	Yes	No	Significance of the effect (Low, moderate, high)	Remarks
	populated or built-up, which could be affected by the project?				
35	Are there any areas in or around the location, which is occupied by sensitive land uses e.g., hospitals, schools, places of worship, community facilities, which could be affected by the project?		√		No such impacts are anticipated
36	Are there any areas in or around the location, which contain important, high quality or scarce resources e.g., groundwater, surface waters, forestry, agriculture, fisheries, tourism, minerals, which could be affected by the project?		√		No such impacts are anticipated
37	Are there any areas in or around the location, which are already subject to pollution or environmental damage e.g., where existing legal environmental standards are exceeded, which could be affected by the project?		√		No such impacts are anticipated

I. CONCLUSION AND SCREENING DECISION SUMMARY OF ENVIRONMENTAL EFFECTS:

Assuming that all mitigation measures are implemented as proposed, the following effects can be predicted

Key project activities	Potential Environmental Effects	Significance of environmental effect with mitigation in place NS - Effect not significant, or can be rendered insignificant with mitigation SP - Significant positive effect SN - Significant negative effect
Rehabilitation and upgrading of 5 Nos of existing Greenhouses at Planting Materials Production Unit, HORDI- Gannoruwa	Dust, Noise, Vibration, Siltation, Vegetation Loss, Crop Damage	NS
Construction of 10 Nos of Semi-Automated Poly Tunnel for Planting Materials Production Units at University Experimental Station- Dodangolla, Seed Farm-Kundasale and HORDI- Gannoruwa.	Dust, Noise, Vibration, Siltation, Vegetation Loss, Crop Damage	NS
Construction of 01 No of Fully Automated Poly Tunnel for Planting Materials Production Unit at HORDI, Gannoruwa	Dust, Noise, Vibration, Siltation, Vegetation Loss, Crop Damage	NS

J. ENVIRONMENTAL MANAGEMENT PLAN

1. Contractor's responsibility for preventing/minimizing/ mitigating adverse environmental issues raised during construction activities

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
1	Public complaints and lack of stakeholders' support for the project implementation	<ul style="list-style-type: none"> Information Disclosure among Stakeholders 	<ul style="list-style-type: none"> Discussions should be conducted with the relevant stakeholders to aware the subproject activities Disseminate the finalized subproject's activity list and implementation arrangement with staff of HORDI, Seed Farm, University Experimental Station and other stakeholders Timely conduct the progress review meetings with relevant stakeholders to discuss the implementation of subproject activities The contractor should take note of all impacts, especially temporary issues and safety hazards that will be of concern to the research stations routing activities. All possible negative impacts will be mitigated as stipulated in the EMP to mitigate them The contractor will maintain a log of any grievances/complaints and actions taken to resolve them and incorporate a summary to the progress reports A copy of the EMP should be available at all times at the project supervision office on site
2	Spreading COVID 19	<ul style="list-style-type: none"> All activities as per health guidelines 	<ul style="list-style-type: none"> The contractor must ensure that all workers, including managers and other staff, are well trained/make aware on COVID 19 safety precautions/health guidelines published by the health ministry/authorities All construction activities should follow the 'INTERIM GUIDANCE ON COVID-19 (VERSION 1: APRIL 7, 2020)' recommended by World Bank's Operations Environmental and Social Review Committee
3	Activities related to subproject's civil works	<p>At HORDI</p> <ul style="list-style-type: none"> Construction of controlled environment research facility, and automated polytunnels Rehabilitation of existing greenhouses 	<ul style="list-style-type: none"> Implement renovation and upgrading activities phase-wise to avoid disturbances to the existing activities Minimize the disturbances to other activities that can be made by the civil works Implement the new construction works within the proposed project period

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
		<p><u>At Seeds Farm and University Experimental Station</u></p> <ul style="list-style-type: none"> • Construction of controlled environment research facility 	<ul style="list-style-type: none"> • Avoid potential damages to the existing rainwater harvesting systems and other utilities
4	Exposing and damaging of physical cultural resources (PCR)	<ul style="list-style-type: none"> • Site preparatory work • Construction of controlled environment research facility • Construction of automated polytunnels • Rehabilitation of existing greenhouses • Vehicle and machinery movements 	<ul style="list-style-type: none"> • Upon discovery of physical cultural material during project implementation work, the following should be carried out • Immediately stop construction activities • With the approval of the resident engineer delineate the discovered site area. • Secure the site to prevent any damage or loss of removable objects. In case of removable antiquities or sensitive remains, a night guard should be present until the responsible authority takes over. • Through the Resident Engineer, notify the responsible authorities, the Department of Archaeology, and local authorities within 24 hours. • Submit a brief chance to find the report, within a specified time period, with the date and time of discovery, location of discovery, description of finding, estimated weight and dimension of PCR, and temporary protection implemented. • Responsible authorities would be in charge of protecting and preserving the site before deciding on the proper procedures to be carried out. • An evaluation of the finding will be performed by the Department of Archaeology who may decide to either remove the PCR deemed to be of significance, further excavate within a specified distance of the discovery point and conserve on-site, and/or extend/reduce the areas demarcated by the contractor, etc. This should ideally take place within about 7 days. • Construction work could resume only when permission is given from the Department of Archaeology after the decision concerning the safeguard of the heritage is fully executed.
5	Spreading of Invasive Alien Species	<ul style="list-style-type: none"> • Vegetation clearing • Importation of construction materials, organic manure and machinery from outside 	<ul style="list-style-type: none"> • Manual and integrated vegetation clearing • Prevent weed spreading via construction materials, machinery and organic manure (Compost) by periodic inspection and manual removal if observed

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
		<ul style="list-style-type: none"> • Desilting 	<ul style="list-style-type: none"> • Construction materials and organic manure should be supplied only from suppliers having relevant approvals
6	Noise Pollution & Vibration that can affect nearby structures	<ul style="list-style-type: none"> • Use of construction vehicles and machineries • Transportation of products from outside 	<ul style="list-style-type: none"> • Working time for noise/vibration generation activities should be restricted and carried out only from 6 am to 6 pm. • Noise related to all agricultural improvement activities should not exceed 55 dB (daytime) and 45dB (night time) as practicable as possible. • Equipment and machinery should be maintained in good condition. • It is highly recommended to do transportation during daytime only
7	Air Pollution including dust generation that can affect nearby vegetation and households	<ul style="list-style-type: none"> • Site Preparation activities setting up of material storage yards, and removal of vegetation • Transport of construction materials and storage on site 	<ul style="list-style-type: none"> • In the construction method statement, the contractor should clearly designate areas for maintaining material stockpiles, waste stockpiles, labor camps, and vehicle maintenance yards. These dust-emitting sources should be located away from human settlements and natural drainage paths as much as possible. • All heavy equipment and machinery shall be fitted in full compliance with the national and local regulations. • Stockpiled soil and sand shall be slightly wetted before loading, particularly in windy conditions. • The site should be wetted at least 2/3 times a day during dry weather to keep dust levels low. • Vehicles transporting soil, sand, and other construction materials shall be covered. Limitations to the speeds of such vehicles are necessary. Transport through densely populated areas should be avoided. • Regular and proper maintenance of construction vehicles and machinery to avoid air emissions. • There should be no burning of wastes on-site. • Until removal to arranged disposal sites, waste from demolition shall be held stockpiled in a place with minimal interference with local drainage paths and obstruction to traffic, local residents.

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
8	Solid Waste Disposal	<ul style="list-style-type: none"> • Site clearing • Construction waste • Waste from labor resting areas and labor camps 	<ul style="list-style-type: none"> • The contractor shall make a list of all types of waste resulting from the construction activity, and obtain direction from the relevant LA on possible disposal sites for each waste type. • Any hazardous type of waste shall be dealt with special care and instructions from the LA. • The contractor shall document all types and quantities of waste generated and removed from the site and the disposal locations. • The contractor shall remove waste from the site each day and dispose of the waste in the LA-approved site/s.
9	Contamination of water, land and air during usage of chemicals (Oil, Greis, petroleum products...) and Solid Waste Disposal	<ul style="list-style-type: none"> • Civil works • Transportation • Organic materials disposal • Chemical waste disposal 	<ul style="list-style-type: none"> • Awareness of usage time, handling, and storage of chemicals • Guidance on a suitable time for the usage of chemicals • Enhance the supervision activities • Dispose all the solid waste as directed by the local authority of the area • Maintain site hygienic condition well
10	Water Quantity	<ul style="list-style-type: none"> • For construction activities 	<ul style="list-style-type: none"> • Excess water extraction is to be cut down to up to subproject is completed • Proper introduction of sprinkler irrigation practices instead of conventional irrigation to preserve water and use of modern techniques to reduce water consumption • Proper irrigation practice to avoid excess water drain back to the canals
11	Health & safety hazard	<ul style="list-style-type: none"> • Use of chemicals for construction activities 	<ul style="list-style-type: none"> • Carry out proper hazardous identification and risk assessment of all proposed activities • Training and awareness for workers on safe chemical handling • Implement proper health and safety protocols by elimination, substitution, engineering controls, administrative control, and providing personal protective equipment (PPEs). Provide necessary PPEs (basic should include gloves, goggles, masks, and protective clothing) • A safety inspection checklist should be prepared to take into consideration what the workers are supposed to be wore and monitored

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
12	Temporary loss of livelihood due to civil works	<p><u>At HORDI</u></p> <ul style="list-style-type: none"> • Construction of controlled environment research facility, and automated polytunnels • Rehabilitation of existing greenhouses <p><u>At Seeds Farm and University Experimental Station</u></p> <ul style="list-style-type: none"> • Construction of controlled environment research facility 	<ul style="list-style-type: none"> • Since the subproject activities are taken place in research station, seed farm and university experimental station, no such impacts are anticipated
13	Blocking of surface drainage paths leading to localized flooding and ponding of water	<ul style="list-style-type: none"> • Site Preparation including provision of access roads, material/waste piles 	<ul style="list-style-type: none"> • Until transport to approved disposal sites, debris and waste from site preparation work and desilting shall be stockpiled in a place with minimal interference with local drainage paths and obstruction to traffic and local residents. The contractor shall identify areas for stockpiling material and waste. • The stockpiles should be suitably covered to minimize wash-offs to nearby waterways during rainy periods and to minimize dust emission during dry weather conditions. • If impacts to surface drainage cannot be avoided leading to ponding of rainwater and inconvenience to people, the contractor must provide an adequate surface drainage system to safely remove water from the site to the canal to avoid on-site ponding or flooding. • Proper planning to avoid construction during the rainy season. • Preventing total blockage of streams / providing alternative drainage paths during construction.
14	Public/occupational safety hazard	<ul style="list-style-type: none"> • Site clearing, storage of equipment, material etc. • Increased traffic of heavy vehicles for material transportation • Noise and vibration of construction machinery 	<p>Training</p> <ol style="list-style-type: none"> 1. The contractor must ensure that all workers, including managers, are trained on occupational health and public safety risks and mitigation measures for the site, prior to commencement of construction. <p>Personal Protective Equipment</p>

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
			<p>2. All workers will be provided with necessary PPEs (basic should include a safety helmet, protective footwear, and high visibility jackets).</p> <p>3. In addition, the contractor shall maintain in stock at the site office, gloves, ear muffs, goggles, dust masks, safety harness, and any other equipment considered necessary.</p> <p>4. A safety inspection checklist should be prepared to take into consideration what the workers are supposed to be wore and monitoring.</p> <p>Site Delineation and Warning Signs</p> <p>5. The entire construction site should be delineated using devices such as cones, lights, tubular markers, orange and white stripes, and barricades to inform oncoming vehicular traffic and pedestrians in the area about work zones.</p> <p>6. All digging and installation work items that are not accomplished should be isolated and warned of by signposts and flash lamps in the night-time.</p> <p>7. Dangerous warning signs should be raised to inform the public of particular dangers and to keep the public away from such hazards.</p> <p>8. Trenches should be progressively rehabilitated once work is completed.</p> <p>9. Overloading of vehicles with materials should be controlled</p> <p>10. Construction wastes should be removed as much as possible within 24 hours from the site to ensure public safety.</p> <p>11. The safety inspection checklist must look to see that the delineation devices are used, whether they are appropriately positioned if they are easily identifiable, and whether they are reflective.</p> <p>Equipment safety</p> <p>12. Work zone workers use tools, equipment, and machinery that could be dangerous if used incorrectly or if the equipment malfunctions. Inspections must be carried out to test the equipment before it is used so that worker safety can be secured. Inspections should look for evidence of wear and tear, frays, missing parts, and mechanical or electrical problems.</p>

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
			<p>Emergency Procedures</p> <p>13. An emergency aid service must be in place on the worksite.</p> <p>14. During health and safety training, site staff should be properly briefed as to what to do in the event of an emergency, such as who to notify and where to assemble in an emergency. This information must be conveyed to employees by the site manager on the first occasion a worker visits the site.</p> <p>Construction camps</p> <p>15. Construction camps should have adequate sanitation facilities for construction workers to control the transmission of infectious diseases.</p> <p>16. Avoid housing workers in camps and provide socio-economic benefits locally by employing local people. If there is no alternative to employ workers from elsewhere, locate accommodation camps away from communities on land acquired from willing sellers. Provide labor camps with adequate sanitation, waste disposal, and health facilities according to labor laws. Clear work campsites after use and reinstate vegetation. Conduct programs to raise worker awareness of HIV/AIDS.</p> <p>Information management</p> <p>17. Develop and establish the contractor's own procedure for receiving, documenting, and addressing complaints from the affected public and nearby communities.</p> <p>18. Provide advance notice to local communities by way of information boards or leaflets about the schedule of construction activities, interruption to services and access, etc.</p>
15	Damages to Flora and Fauna	<ul style="list-style-type: none"> Vegetation clearing/ site clearing 	<ul style="list-style-type: none"> Due consideration should be given to carefully clearing of vegetation avoiding the destruction of habitats of fauna. The de-silted matter shall immediately be disposed of off to pre-decided approved disposal sites.

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
			<ul style="list-style-type: none"> • The contractor will take reasonable precautions to prevent workmen or any other persons from removing and damaging any flora (plant/vegetation) and fauna (animal) including fishing in any water body and hunting of any animal. • If any wild animal is found near the construction site at any point of time, the contractor will immediately upon discovery thereof acquaint the Engineer and carry out the Engineer's instructions for dealing with the same. • The Engineer will report to the nearby Forest Department /Department of Wild Life Conservation (range office or divisional office) and will take appropriate steps/ measures if required in consultation with the forest officials. • It is recommended to do the project work in day time only
16	Soil erosion, sedimentation of nearby waterbodies and low-lying areas	<ul style="list-style-type: none"> • Construction work • Vegetation clearance 	<ul style="list-style-type: none"> • Soil stockpiles and other construction material should not be placed within the bed or banks of the tanks or canal. • Installing and maintaining permanent erosion and sediment control measures such as silt traps to avoid sediment runoff into the tank and nearby waterways.
17	Access restrictions and public inconvenience	<ul style="list-style-type: none"> • Material transportation and storage • Noise, vibration, dust and waste piling from demolition and construction 	<ul style="list-style-type: none"> • If any temporary interruptions to house access take place, the contractor should inform the concerned houses prior to breaching access. • Provision of access during designated times of the day or where possible provides temporary access paths for pedestrians on the downstream side of the bund. • If a road is closed completely for a period, signage is to be put up at both ends.
Post construction phase			
18	Clearing/Closure of Construction Site/Labour Accommodations		<ul style="list-style-type: none"> • Contractor to prepare site restoration plans for approval by the engineer. The plan is to be implemented by the contractor prior to demobilization. This includes burrow sites and storage yards as well • On completion of the works, all temporary structures will be cleared away, all rubbish cleared, excreta or other disposal pits or trenches filled in and effectively sealed off and the site left clean and tidy, at the contractor's expenses, to the entire satisfaction of the engineer.

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing Mitigation Measures proposed and action to be implemented by the Contractor
19	Solid waste	<ul style="list-style-type: none"> Operational stage crops related waste, general household waste & machinery parts. 	<ul style="list-style-type: none"> Any hazardous type of waste shall be dealt with special care and instructions from relevant local authority. The contractor shall remove waste from the site each day and dispose of the waste as appropriate with support of local authority
20	Environmental Enhancement/Landscaping		<ul style="list-style-type: none"> Landscape plantation, including turfing shall be taken up as per either detailed design or typical design guidelines given as part of the Bid Documents. The contractor also shall remove all debris, piles of unwanted earth, spoil material, away from the site and disposed at locations designated or acceptable to the Engineer or as per the stipulated waste management criteria of this EMP

2. Cost of mitigation

SN	Environmental mitigation measure	Cost (LKR)	Remarks
1	Information Boards, leaflets	35,000	Diversion of roads, Safety signage, awareness leaflets & COVID 19 sign boards
2	On site first aid facilities	15,000	
3	Personal Protective Equipment (PPE)	70,000	Basic should include sanitizers, safety helmet, protective footwear and high visibility jackets.
4	Site delineation and barricading material and equipment	15,000	
4	Dust suppression	20,000	Need to be done during road and canal renovation activities
5	Waste removal from site	20,000	Desilted material, waste from vegetation clearing, labour camps (amount is only for construction phase)
6	Training of Farmers and Village level stakeholders on new technological applications	20,000	Should be scheduled to a few sessions

K. OPERATIONAL ENVIRONMENT MANAGEMENT PLAN

1. The client's (Research Station's Officers) responsibility for preventing/minimizing/mitigating adverse environmental issues raised during the subproject operational stage

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing/Mitigation Measures proposed and action to be implemented by the Contractor
1	Soil, Water, and Leachate	<ul style="list-style-type: none"> • Soil and water (surface and ground water) on the onsite is unlikely to be contaminated by the operation of the subproject 	<ul style="list-style-type: none"> • Periodic monitoring of the operation of the wastewater management system of the research station • Ensure the operation of wastewater pits in good condition • Periodic maintenance of the sedimentations, overflow of the waste water pits • Periodic maintenance of the pipelines of the wastewater management system • Timely address the breakdown/blocking of the pipelines and pits • Testing the samples to check the contamination of soil, groundwater table, and the surface water sources of the surrounding area • Avoid surface water stagnation and creating mosquito breeding places • Frequent monitoring of contamination of leachate that is originated in labs with water and soil if any
2	Traffic and Transport Impact	<ul style="list-style-type: none"> • Unnecessary Traffic (Vehicular and Pedestrians) issues raised by Transport needs of the subproject operation 	<ul style="list-style-type: none"> • No new transport needs is generated by the operation of the subproject • Follow the solid waste transport schedule according to the present routing • Identify the new transport needs created by the subproject operation if avail • Plan the new transport needs minimizing present activities • Display the in and out services routes to aware the staff
3	Air Quality	<ul style="list-style-type: none"> • Dust, Odour and Greenhouse Gas generated by the Subproject Operation 	<ul style="list-style-type: none"> • Assess the emission (Air Quality Testing) during subproject operation • Assess the potential impacts of dust, suspended particulate matter, odor, and greenhouse gas emissions • Take precautionary actions to minimize the emission

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing/Mitigation Measures proposed and action to be implemented by the Contractor
4	Noise and Vibration	<ul style="list-style-type: none"> Disturbances and inconveniences occurred by Noise and Vibration 	<ul style="list-style-type: none"> Measure the noise and vibration level of subproject operation Identify the possible impacts by noise and vibration created by subproject operations If exceed the acceptable level of noise and vibration, take precautionary actions to minimize Prepare the specifications of the equipment and machinery with low vibration and noise Introduce a code of conduct for the staff who engages in subproject operations to minimize the noise and vibration impacts. Noise emission levels of all critical plant and equipment should be expected to comply with manufacturers' specifications with noise limits appropriate to those items
5	Invasive Species of Flora and Fauna, Weeds, Pests and Diseases	<ul style="list-style-type: none"> Invasive Species of Flora and Fauna, Weeds, Pests and Diseases spreading due to subproject's operation 	<ul style="list-style-type: none"> Always keep hygienic conditions of the labs, cultivation areas. Disinfect all the soil, plant and pests samples after testing using autoclaves or appropriate technique. The composting organic material, which may contain insect eggs or larvae, weed seeds and spores, will be subject to temperatures in excess of 55 degrees for at least three days. Control the weeds, diseases and pests as stipulated in PMP Select healthy and diseases free planting materials with high purity for the cultivation Avoid the contaminations of cultivation lands Avoid the visitors of the labs and cultivation areas Follow the approved procedures to maintain the hygienic conditions at the labs and cultivation plots Follow the guidelines for the transport of the movement of solid waste from the research station/ farmlands

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing/Mitigation Measures proposed and action to be implemented by the Contractor
			<ul style="list-style-type: none"> • Burnt the crop residuals and the organic waste generated at the locations using safety measures
6	Waste Management	<ul style="list-style-type: none"> • Crops-related waste, general waste 	<ul style="list-style-type: none"> • Dump the organic waste in the soil pit established at the stations • Use the organic waste for compost preparation after heat treatments/ disinfection • Burnt the crop residuals to maintain hygienic conditions of the field • Implement crop rotation to breakdown of pests/ diseases lifecycles
		<ul style="list-style-type: none"> • Utensils of agrochemicals, & chemicals, and chemical waste 	<ul style="list-style-type: none"> • Store in the safe store up to proper dispose • Select a suitable contractor who has facilities for Cement Kiln Co-processing for disposing
		<ul style="list-style-type: none"> • E-Waste 	<ul style="list-style-type: none"> • Segregate the e-waste on its type • Store in the safe store up to proper dispose • Keep records on the accumulated waste • Contact the licensed e-waste collectors (CEA Licensed) • Handing over the e-waste to the licensed e-waste collector for proper disposal that has been approved by the CEA
7	Occupational Health and Safety	<ul style="list-style-type: none"> • Occupational hazards which can cause during subproject operation 	<ul style="list-style-type: none"> • Develop and implement site-specific Health and Safety (H&S) plan which will include measures such as: <ul style="list-style-type: none"> (a) excluding the public from the defined labs/cultivation areas; (b) ensuring all workers/staff are provided with and use of personal protective equipment (PPE); (c) provision of H&S training for all personnel; (d) documented procedures to be followed for all construction activities; and (e) documentation of work-related accidents (There is a SOP that has already been implemented in the labs and all activities have been arranged accordingly).

SN	Potential Environmental Impacts and Risk Level	Key project activities causing the impact	Preventing/Minimizing/Mitigation Measures proposed and action to be implemented by the Contractor
			<ul style="list-style-type: none"> • Provide H&S training to all new workers/staff to ensure that they are appraised of the basic rules of work at the labs, personal protective protection, and preventing injuries to fellow workers/staff • Ensure that a first-aid station, eye washers, bathing location are provided within easy access to all and that trained first-aid personnel are made available to attend to first-aid needs and keep ready the vehicle to a government hospital in emergency case. • Provide medical insurance coverage for all workers/ staff • Ensure that all labs/ cultivation areas are barricaded to prevent unauthorized person entry • Provide a source of potable water and a clean eating place for workers, at a location not exposed to hazardous or noxious substances. • Provide visitors with necessary safety gear if visitors to the labs/cultivation areas are allowed access to areas where incubators, crop/disease samples, culturing activities, hazardous conditions, or substances may be present. • Ensure that visitor/s do not enter hazard areas unescorted by relevant authorized parties in attendance. • Provide signboards to mark, hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal of hazardous substances. • Such signage shall be in accordance with international standards and be well known and easily understood by workers, visitors, and the general public

2. Cost of mitigation

The cost incurred with implementation of O-EMP will be allocated through the research station's budget

K. EMP IMPLEMENTATION RESPONSIBILITIES AND COST

The overall responsibility of ensuring compliance with safeguard requirements rests with the PMU. The PMU is directly responsible for reviewing the proposed activities are aligned with environmental safeguards compliances. The overall supervision will be carried out by the in-house staff of the PMU supported by the staff in research centers. Any consequent modification or amendments of subproject will be negotiated prior to implementation with ASMP and DOA staff with notification to the WB's office. The operational EMP implementation is a responsibility of the particular research station/ seed farm and the required budgetary allocations should be accessed by the research station themselves.

Environmental & Social monitoring will be carried out largely through visual observations and compliance monitoring using the checklist provided in the EMF & RPF by the Safeguard Specialist of the PMU and the DOA jointly. The Environmental and Social Safeguards Specialist will need to visit the site quarterly and report on issues and performance on EMP implementation to the

L. DETAILS OF PERSON RESPONSIBLE FOR THE ENVIRONMENTAL SCREENING

This project does not require environmental clearance under national environmental regulations. No other approval is required due to the spread and magnitude of the project. The project will have negligible environmental impacts, mostly limited to the operation period and there is a set of activities which needs to manage the negative impacts while enhancing positive impact to the environment. The impacts on the physical and biological environment are virtually none.


M. DETAILS OF PERSONS RESPONSIBLE FOR THE ENVIRONMENTAL SCREENING

Screening conducted and reviewed D.M. Sanjaya Bandara Environment and Social Safeguard Specialist Agriculture Sector Modernization Project Name/Designation/Contact information	Date January 2022  Signature
Screening report approved by Dr. Rohan Wijekoon Project Director Agriculture Sector Modernization Project Name/Designation/Contact information	Date January 2022  Signature

N. ANNEXES


Annex 1: Google Map/ Location Map

1. Horticultural Crops Research and Development Institute at Gannoruwa

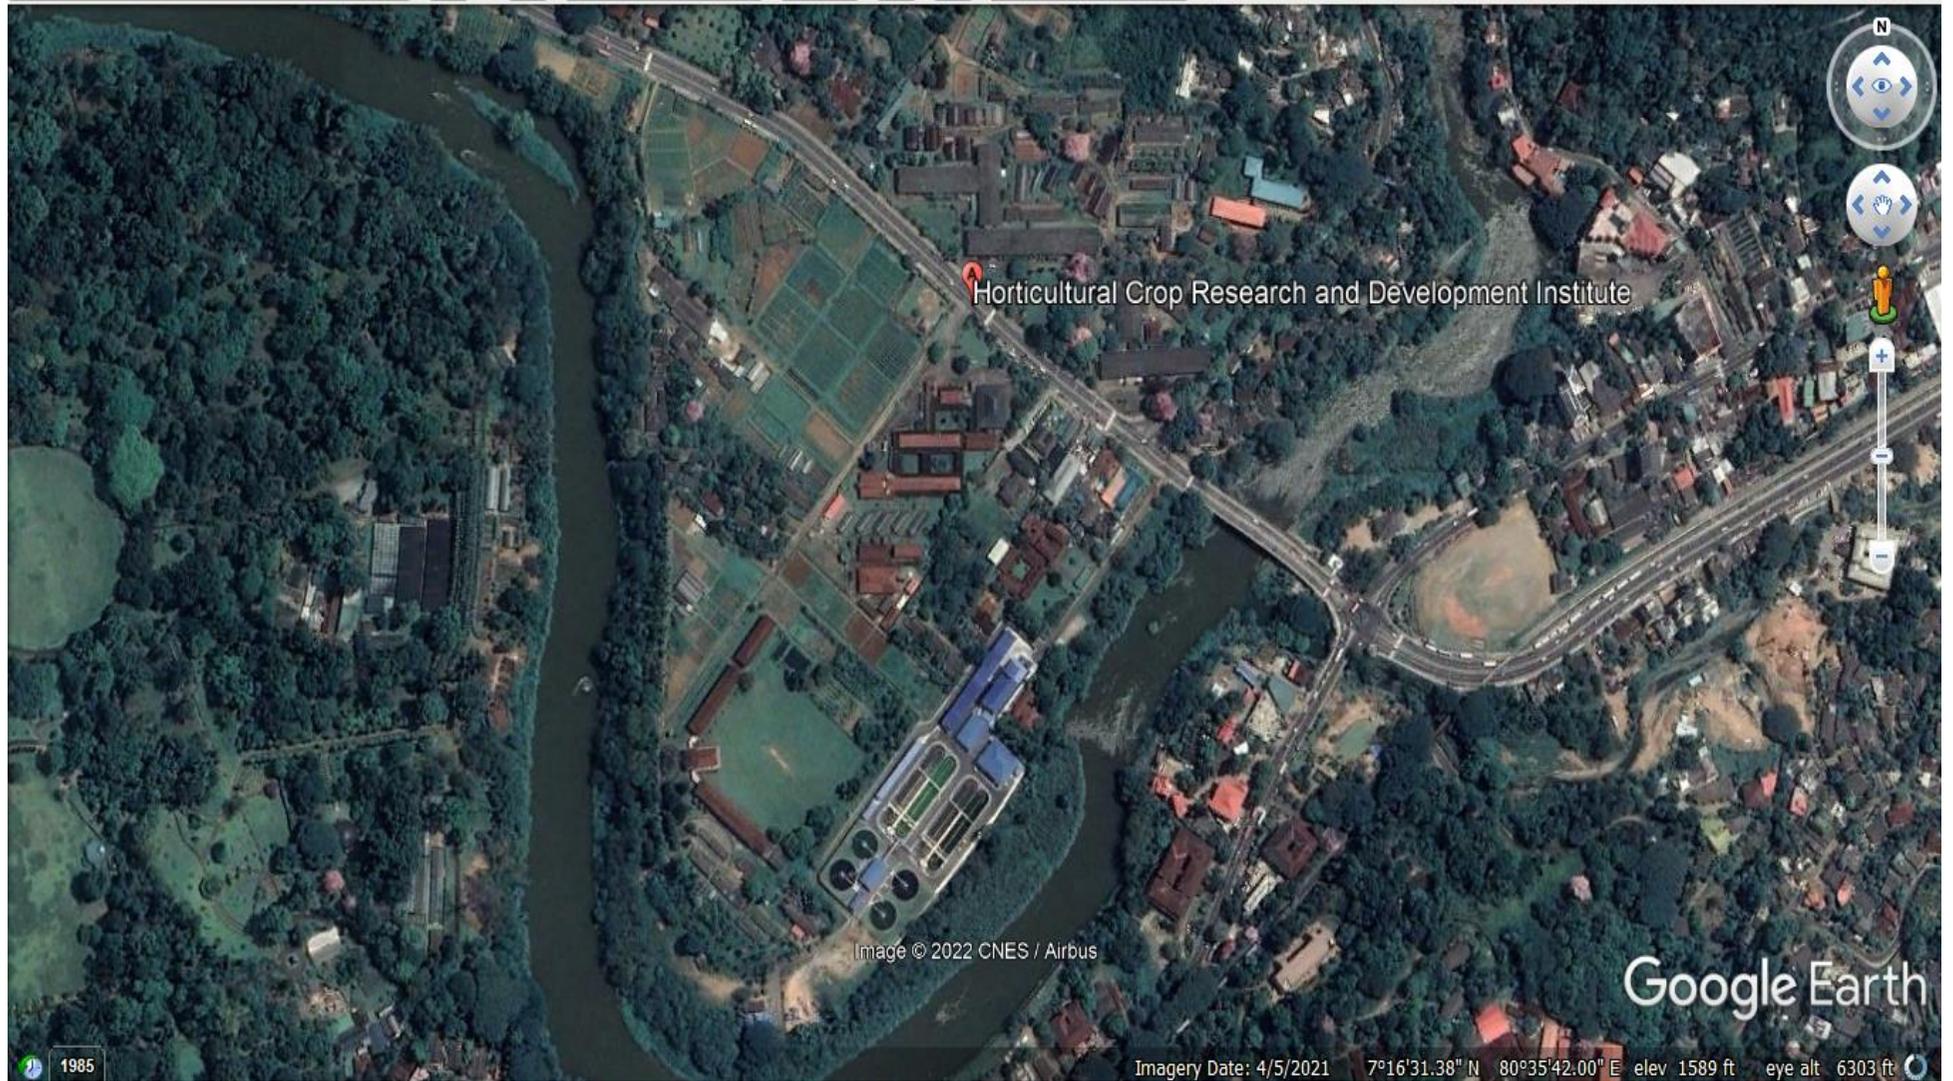


Source: Google Map

2. Seed and Planting Material Production Farm at Kundasale

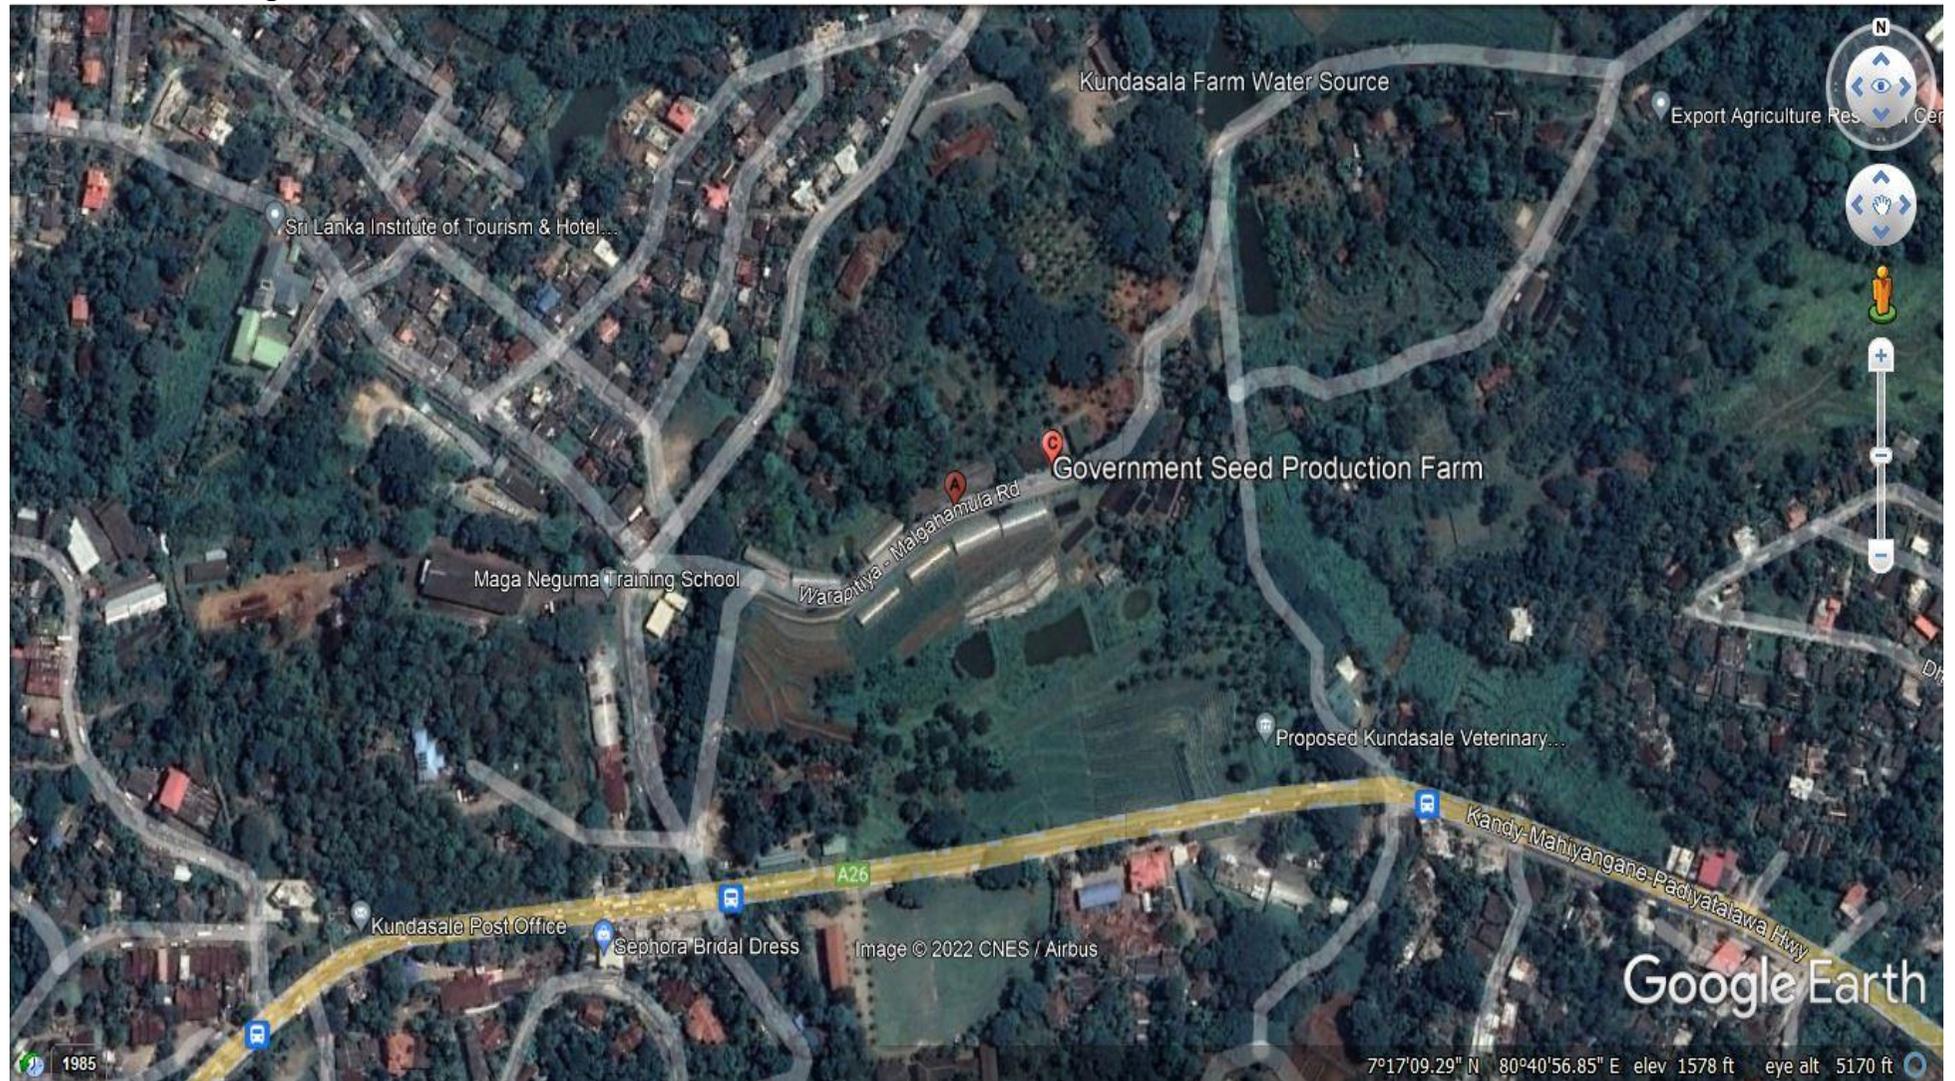


Source: Google Map

3. University Experimental Station at Dodangolla, Kundasale

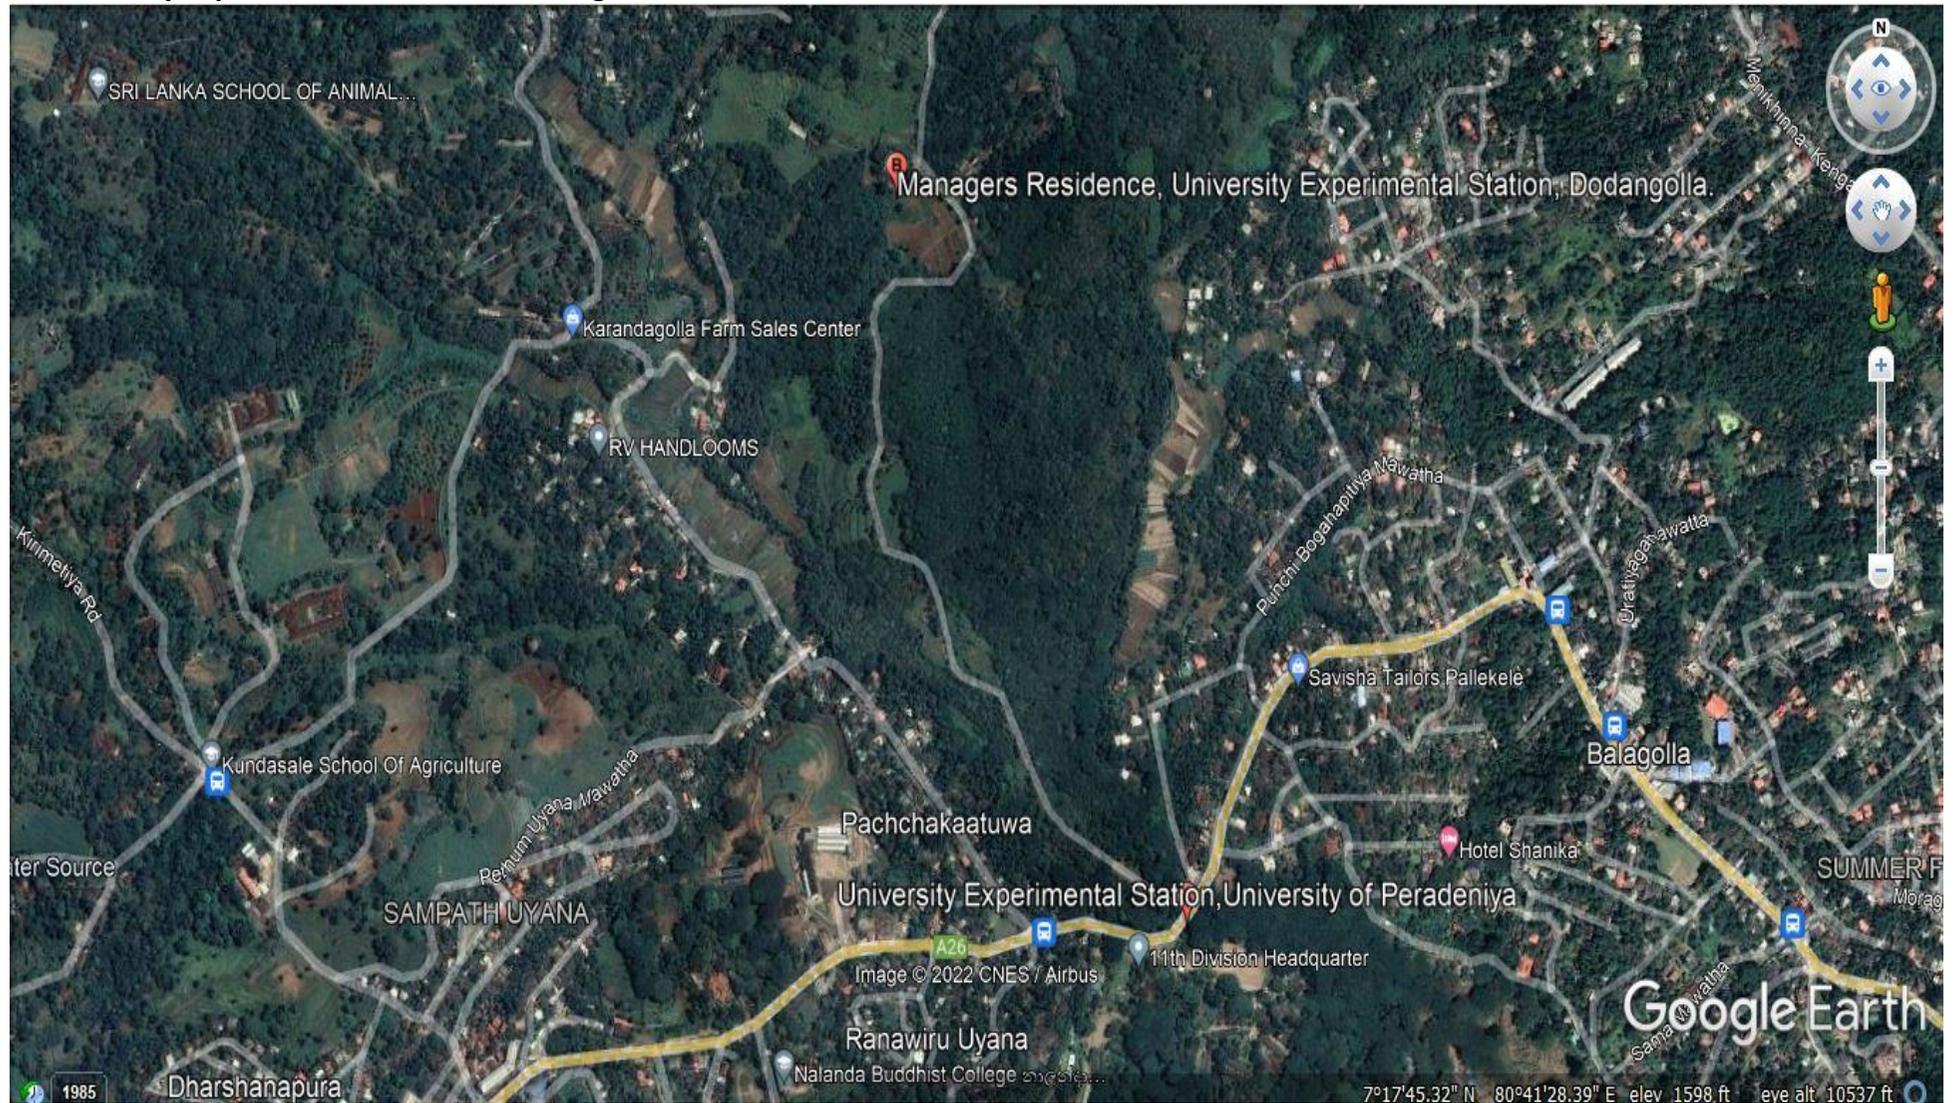


Source: Google Map

Annex 2: Organizational Structure of HORDI

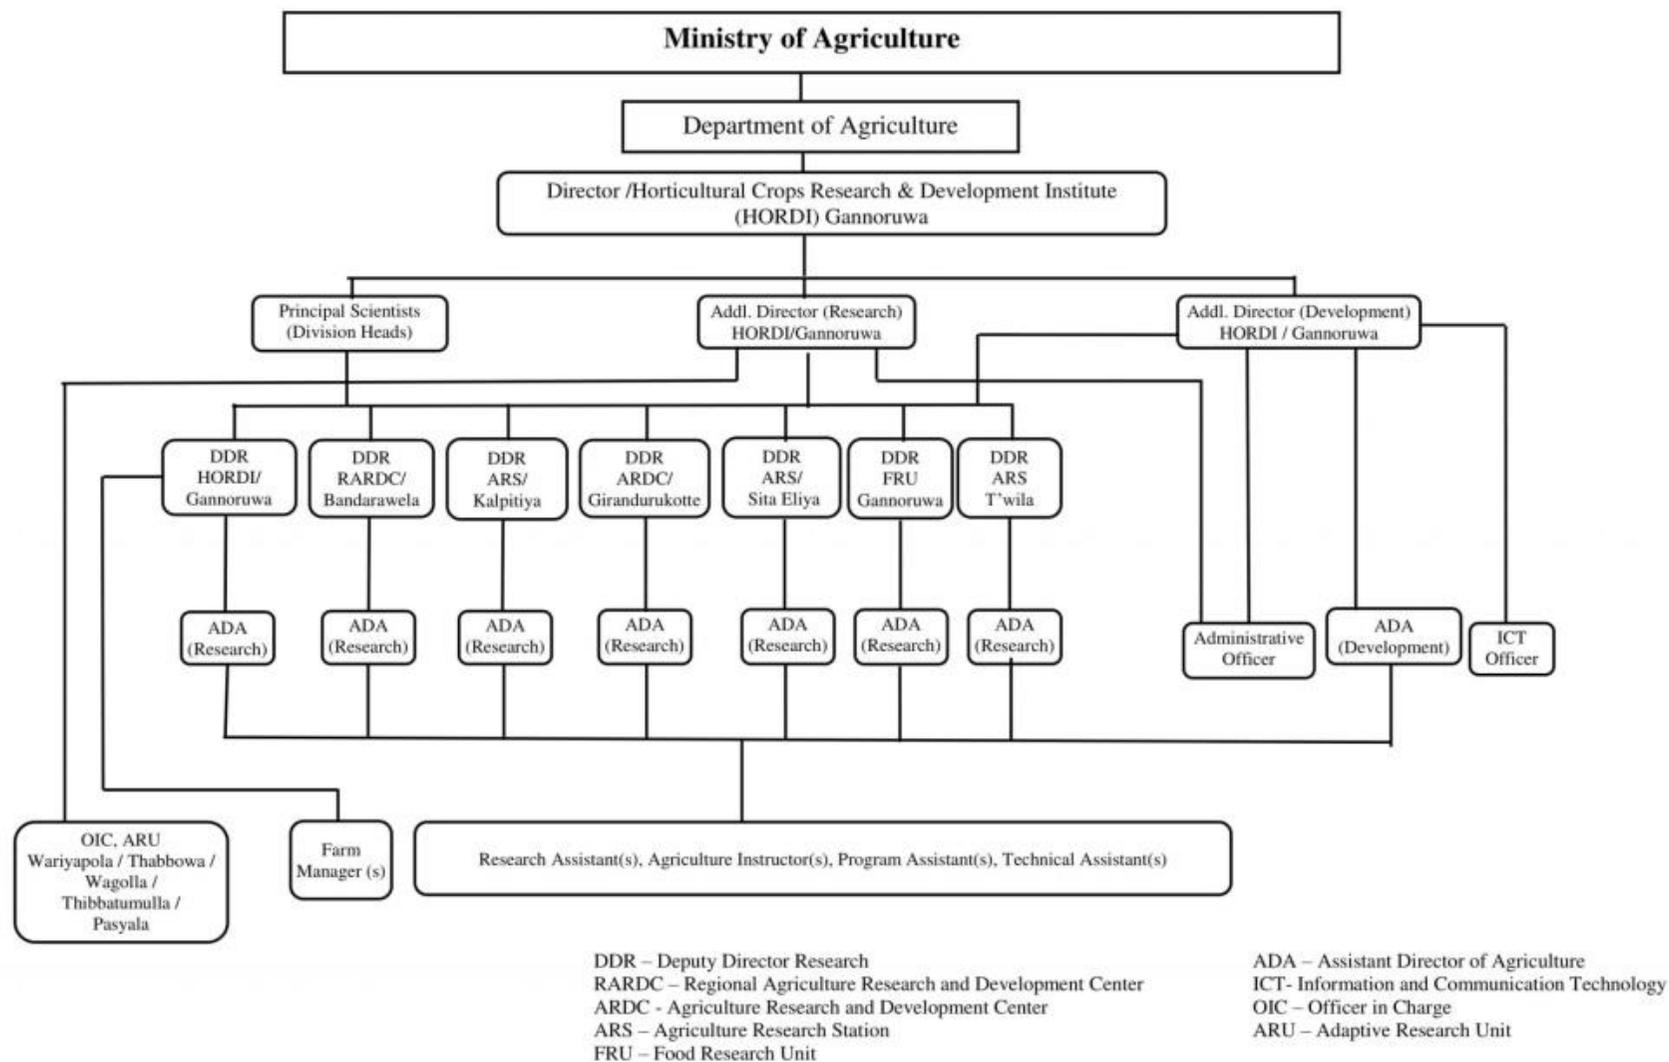

Source: [HORDI Home page – Department of Agriculture Sri Lanka \(doa.gov.lk\)](http://doa.gov.lk)


Annex 3: Organizational Structure of University Experimental Station- Dodangolla

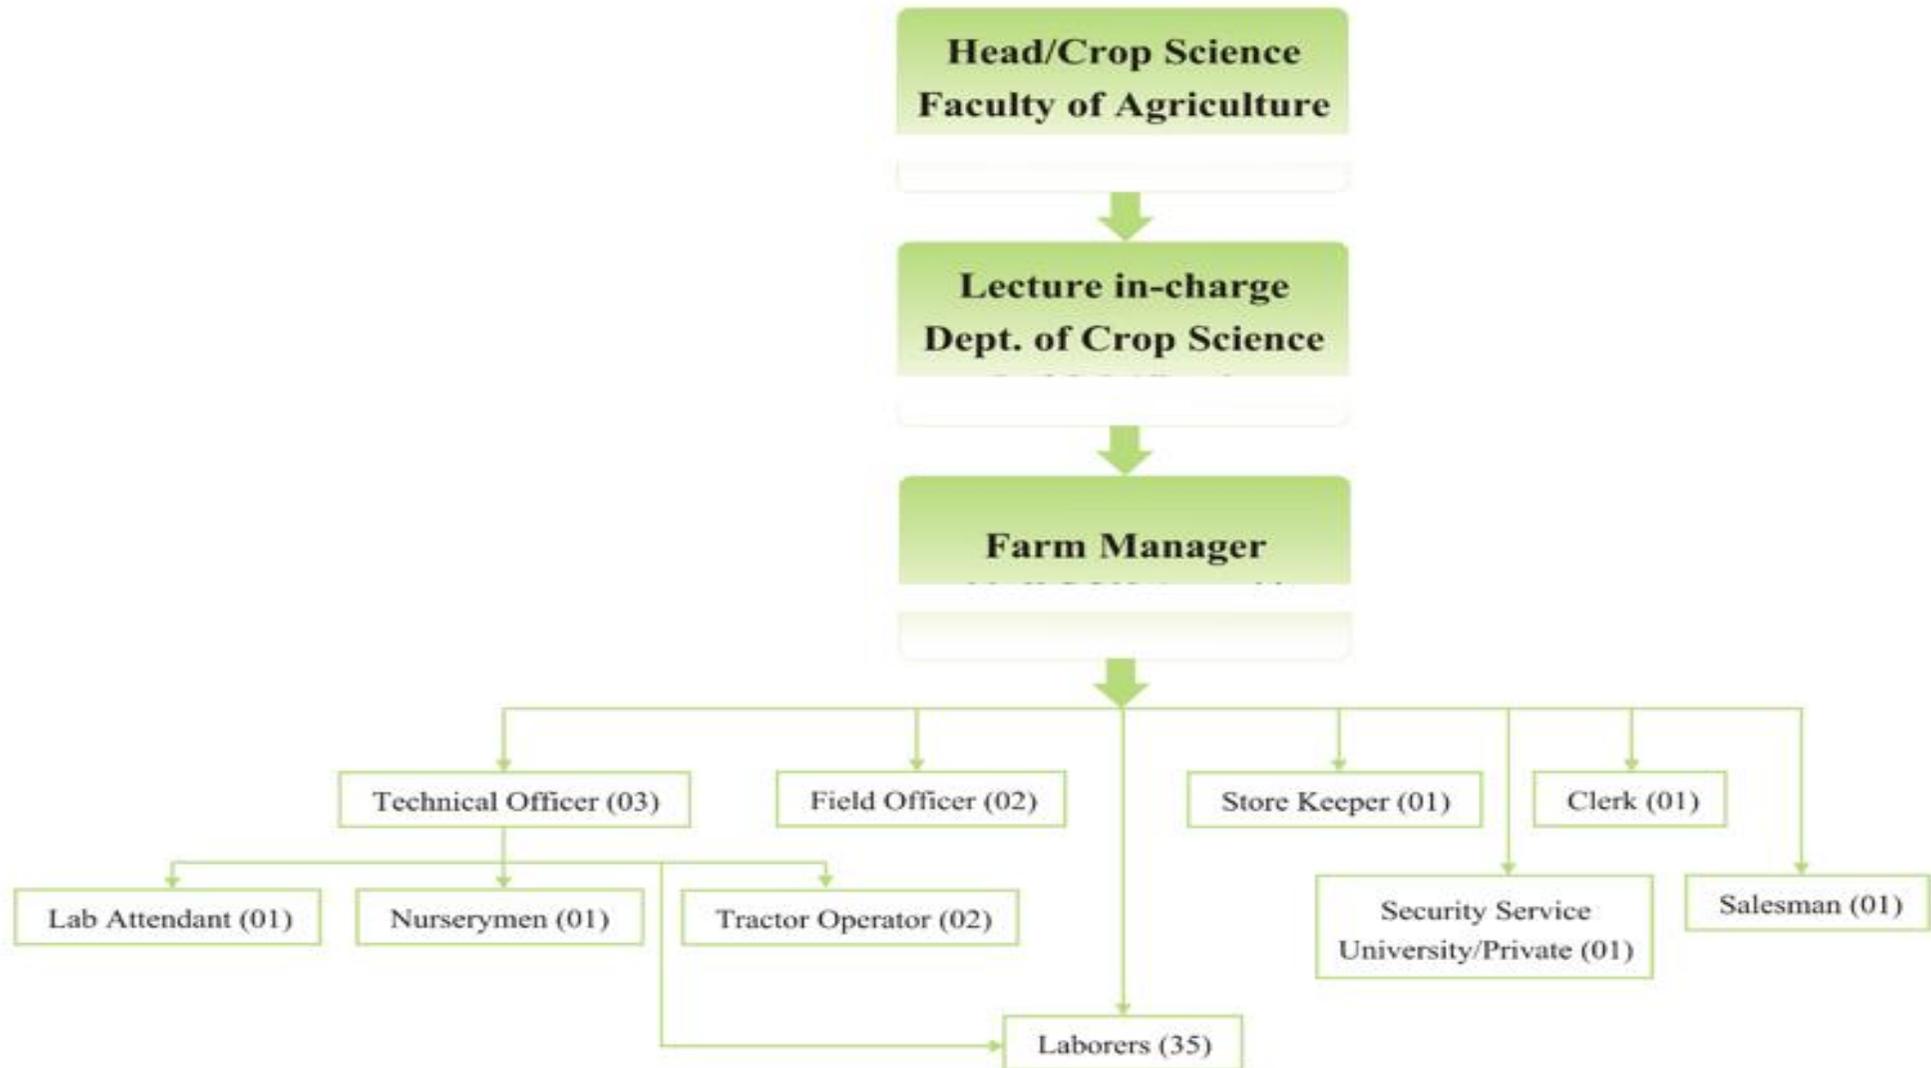


Source: agri.pdn.ac.lk/farms/dodangolla/about.php


Annex 4: Design drawings of New Construction and Renovation Activities

1. Controlled Environment Research Facility Until

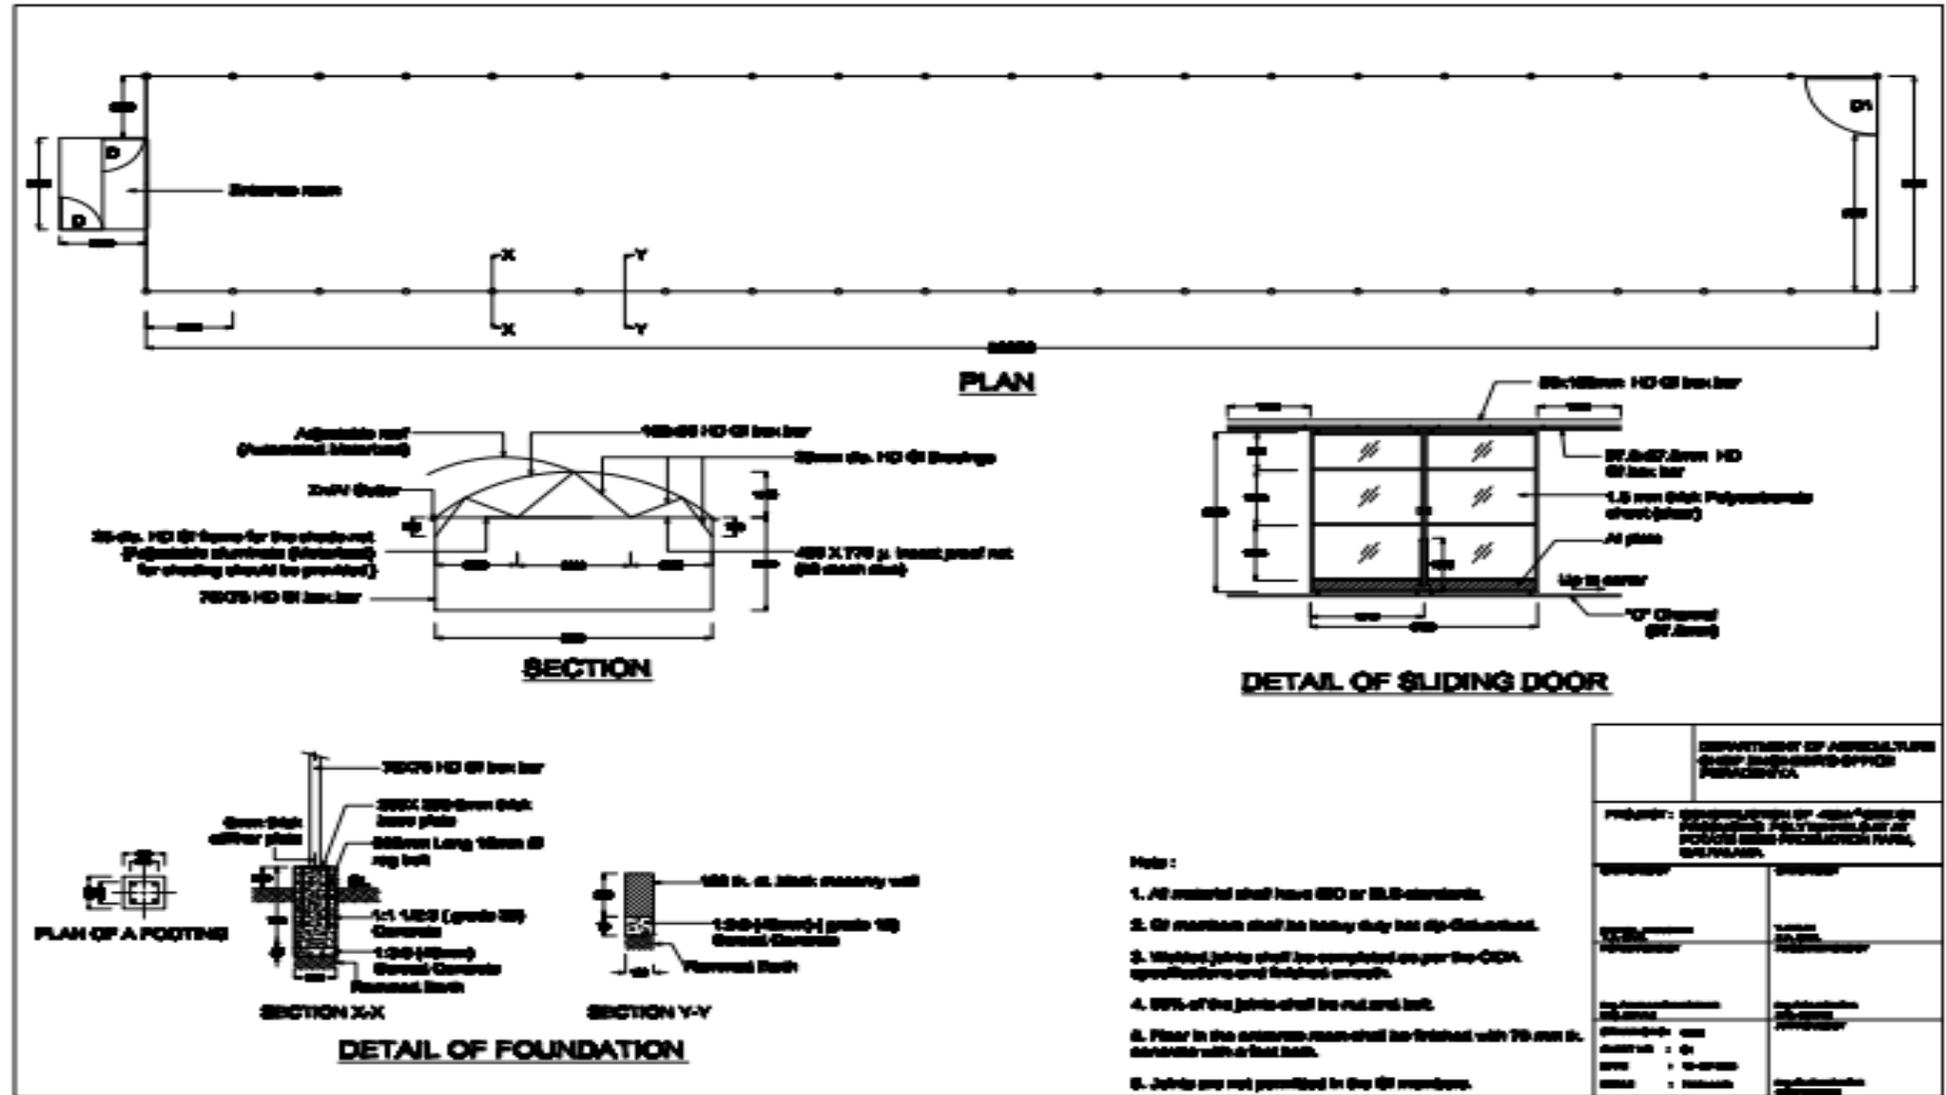


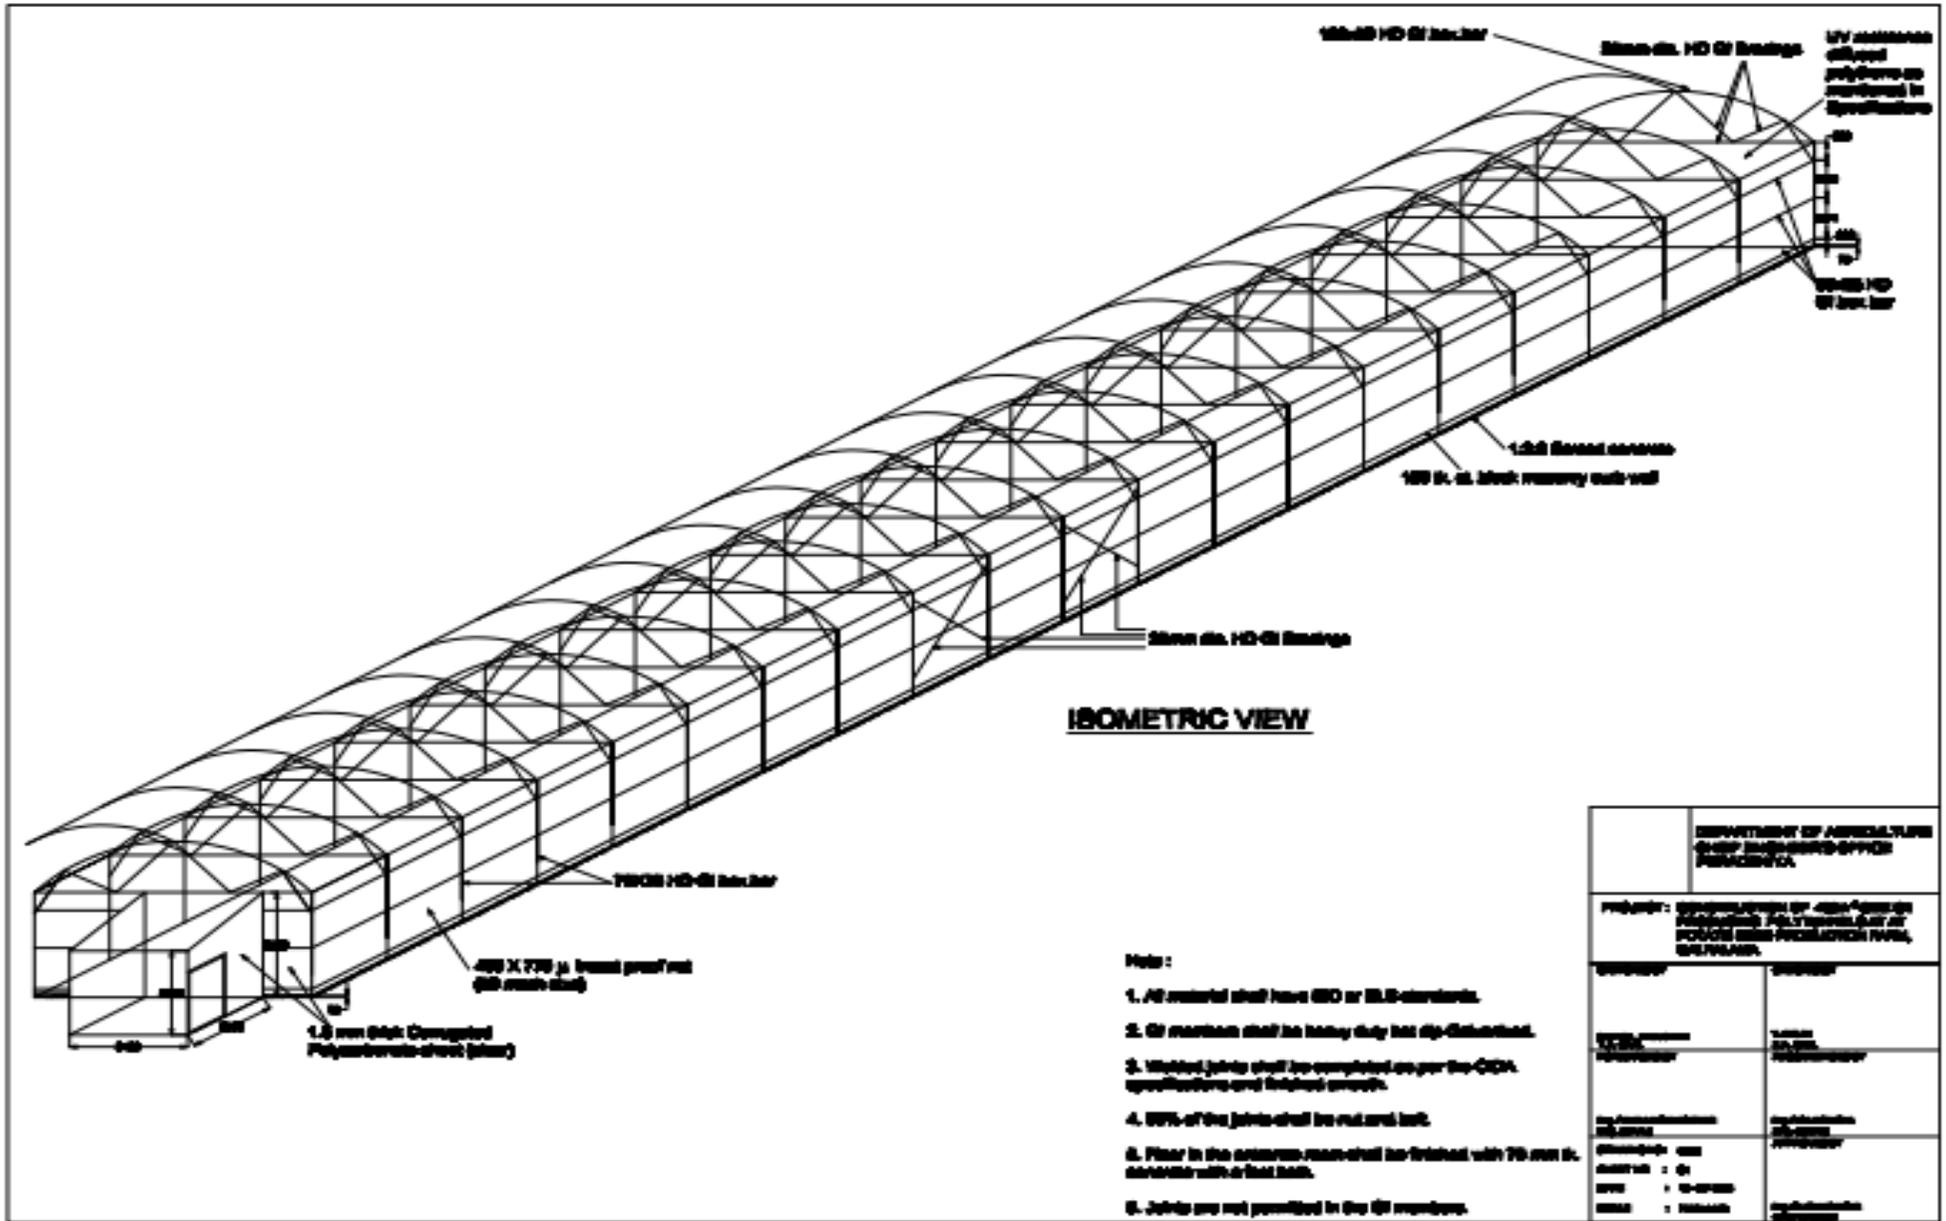

2. Automated Polytunnel

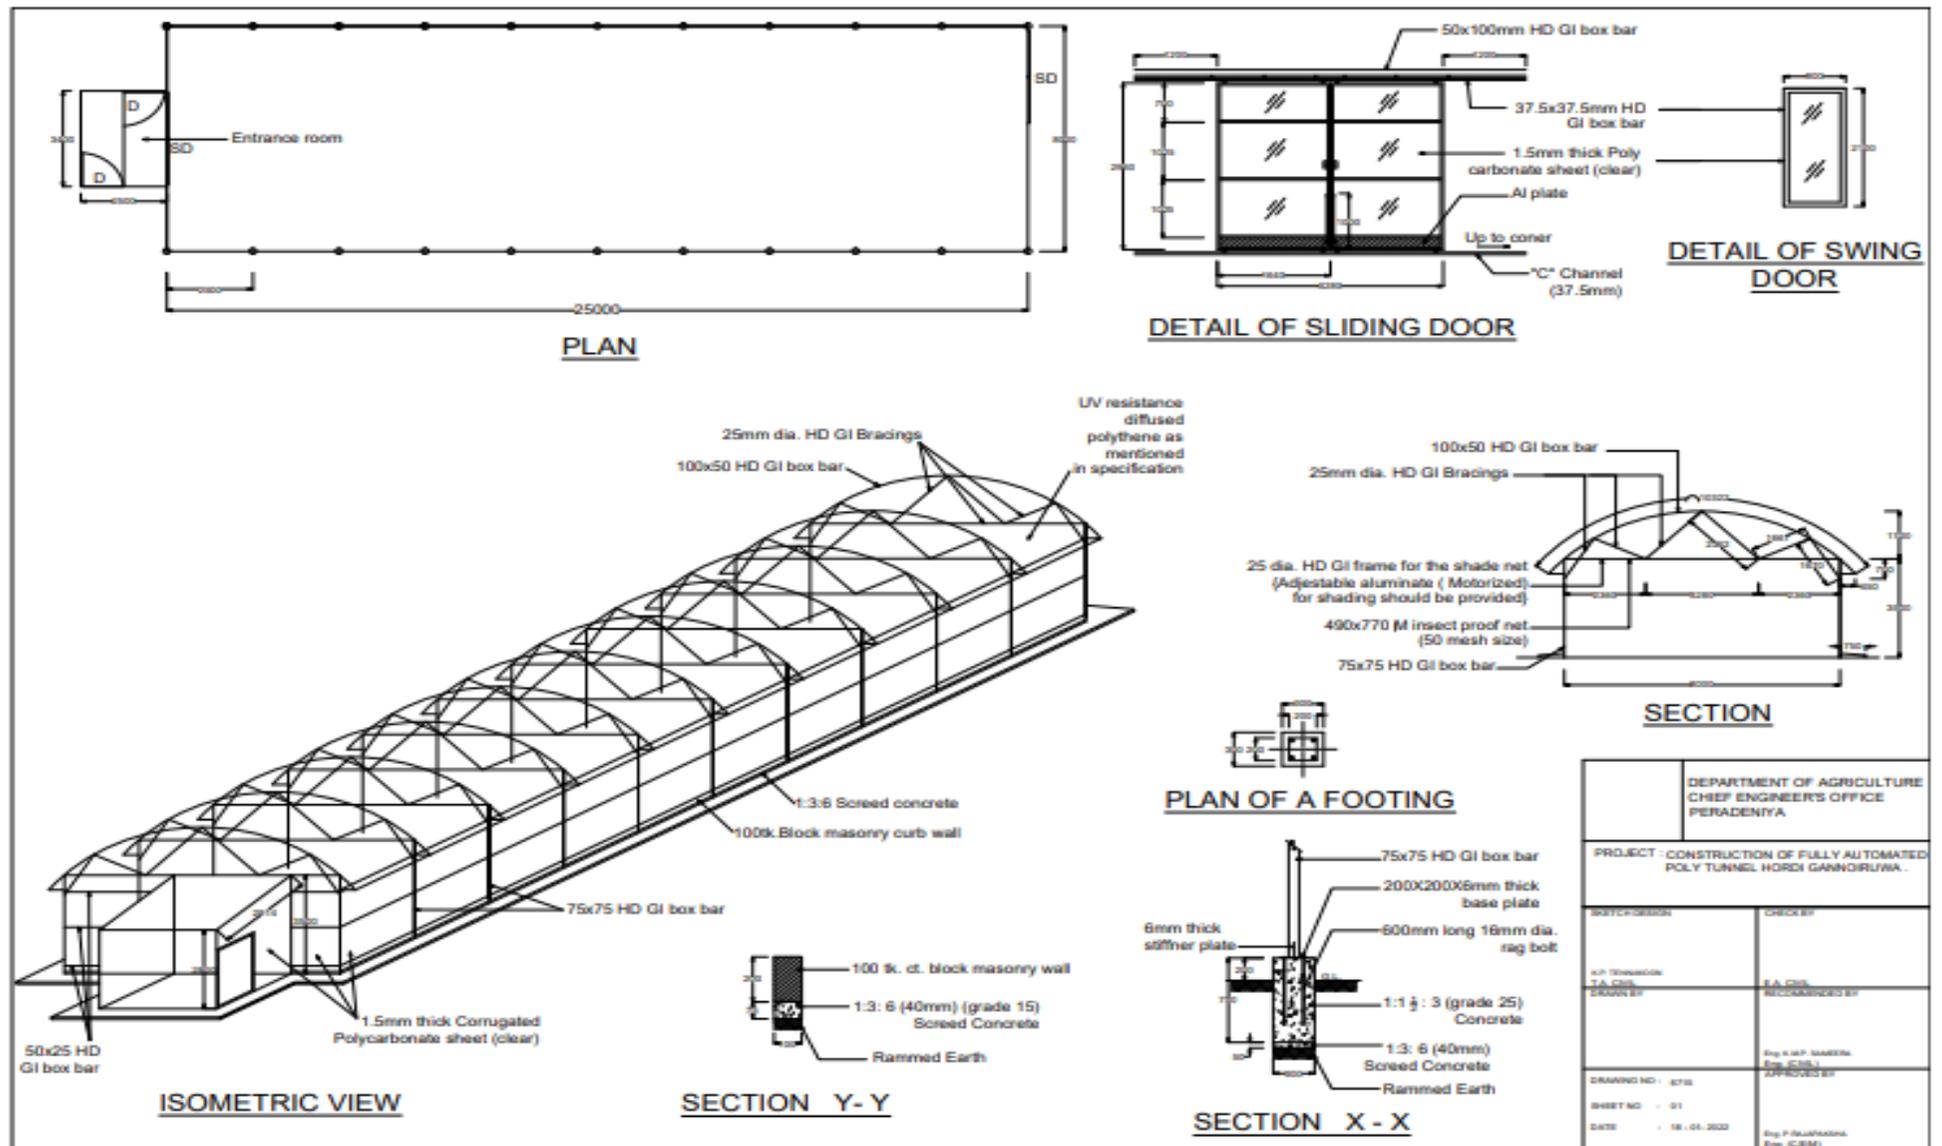


3. Renovation Work of Plant House (Soil) at - HORDI, Gannoruwa

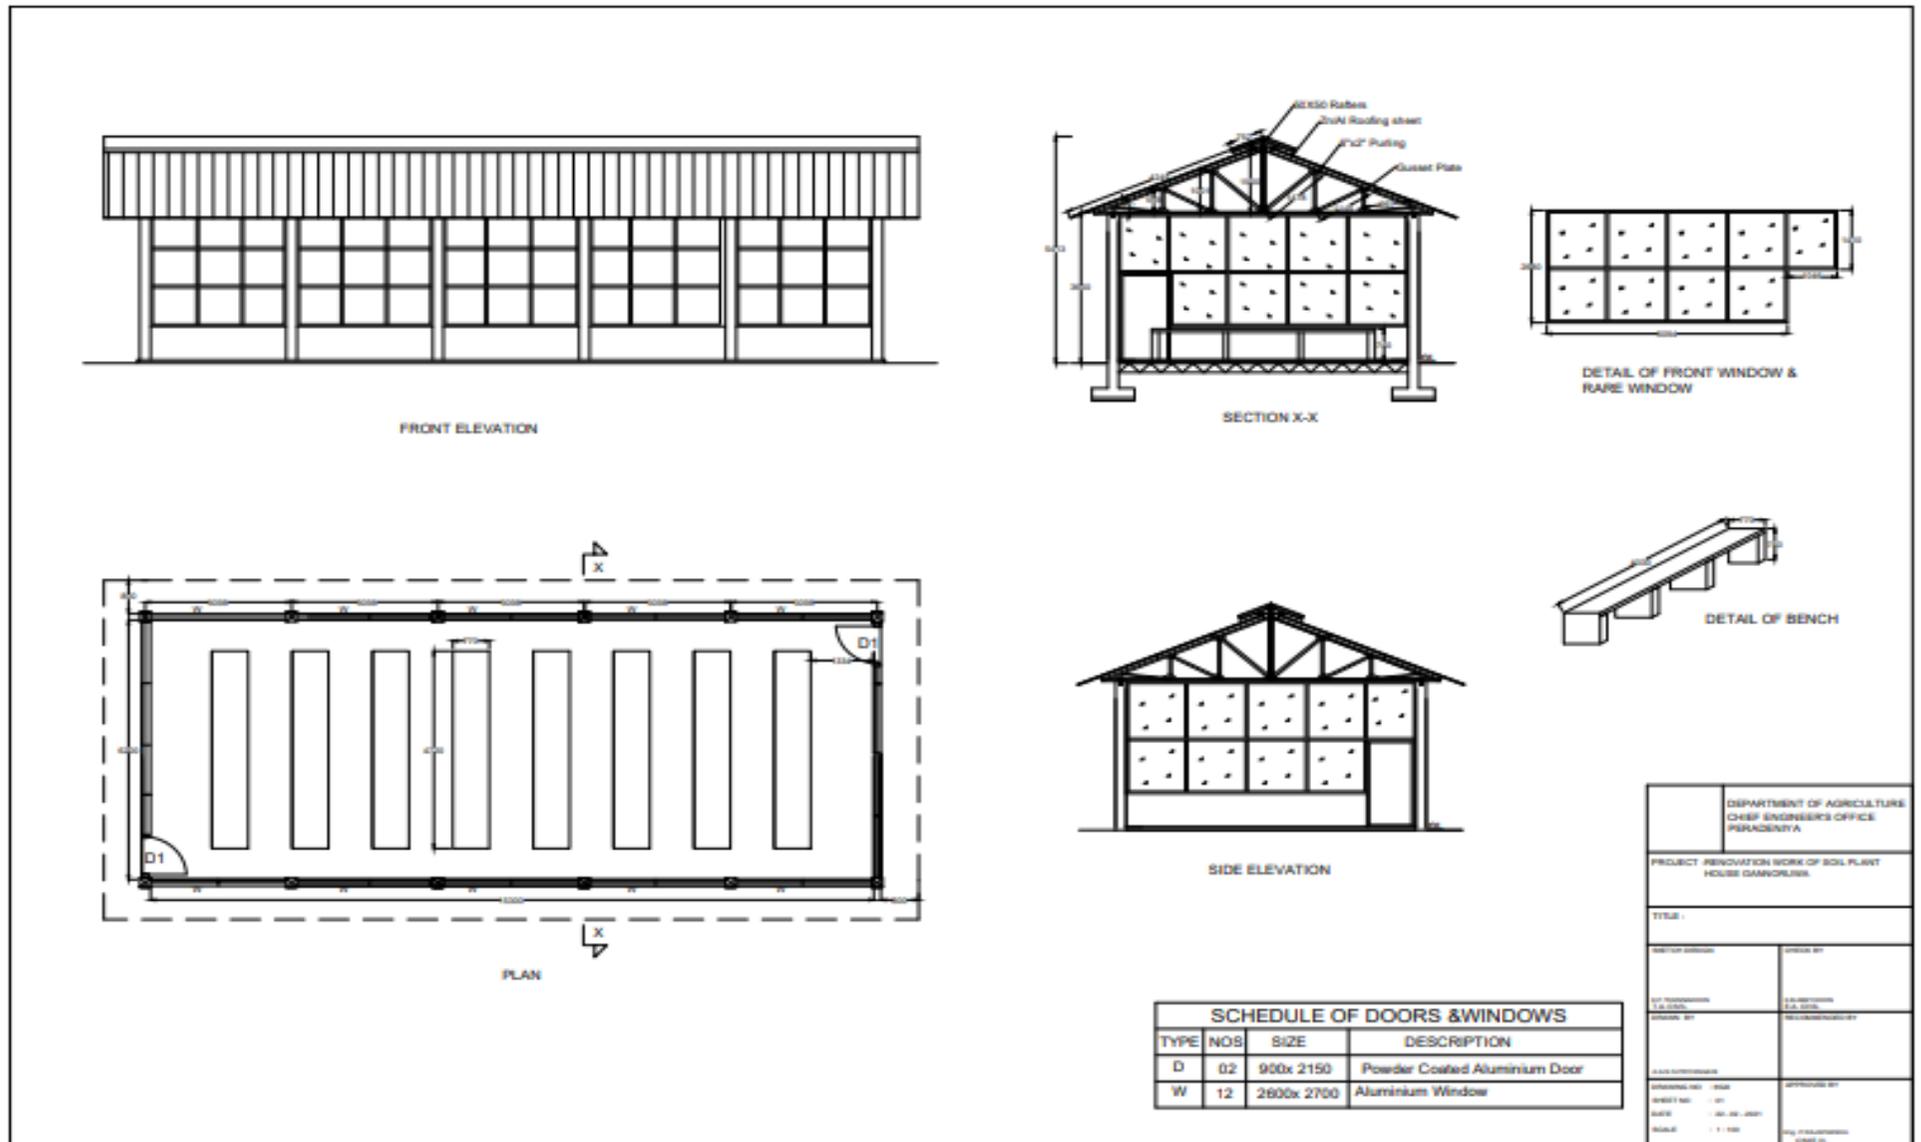


SCHEDULE OF DOORS & WINDOWS			
TYPE	NOS	SIZE	DESCRIPTION
D	02	900x 2150	Powder Coated Aluminium Door
W	12	2800x 2700	Aluminium Window

DEPARTMENT OF AGRICULTURE CHIEF ENGINEER'S OFFICE PARANURTA	
PROJECT: RENOVATION WORK OF SOIL PLANT HOUSE GANNORUWA	
TITLE:	
DESIGNED BY:	DRAWN BY:
CHECKED BY:	APPROVED BY:
DATE:	SCALE:


4. Renovation Work of Plant House (Tissue Culture) at - HORDI, Gannoruwa

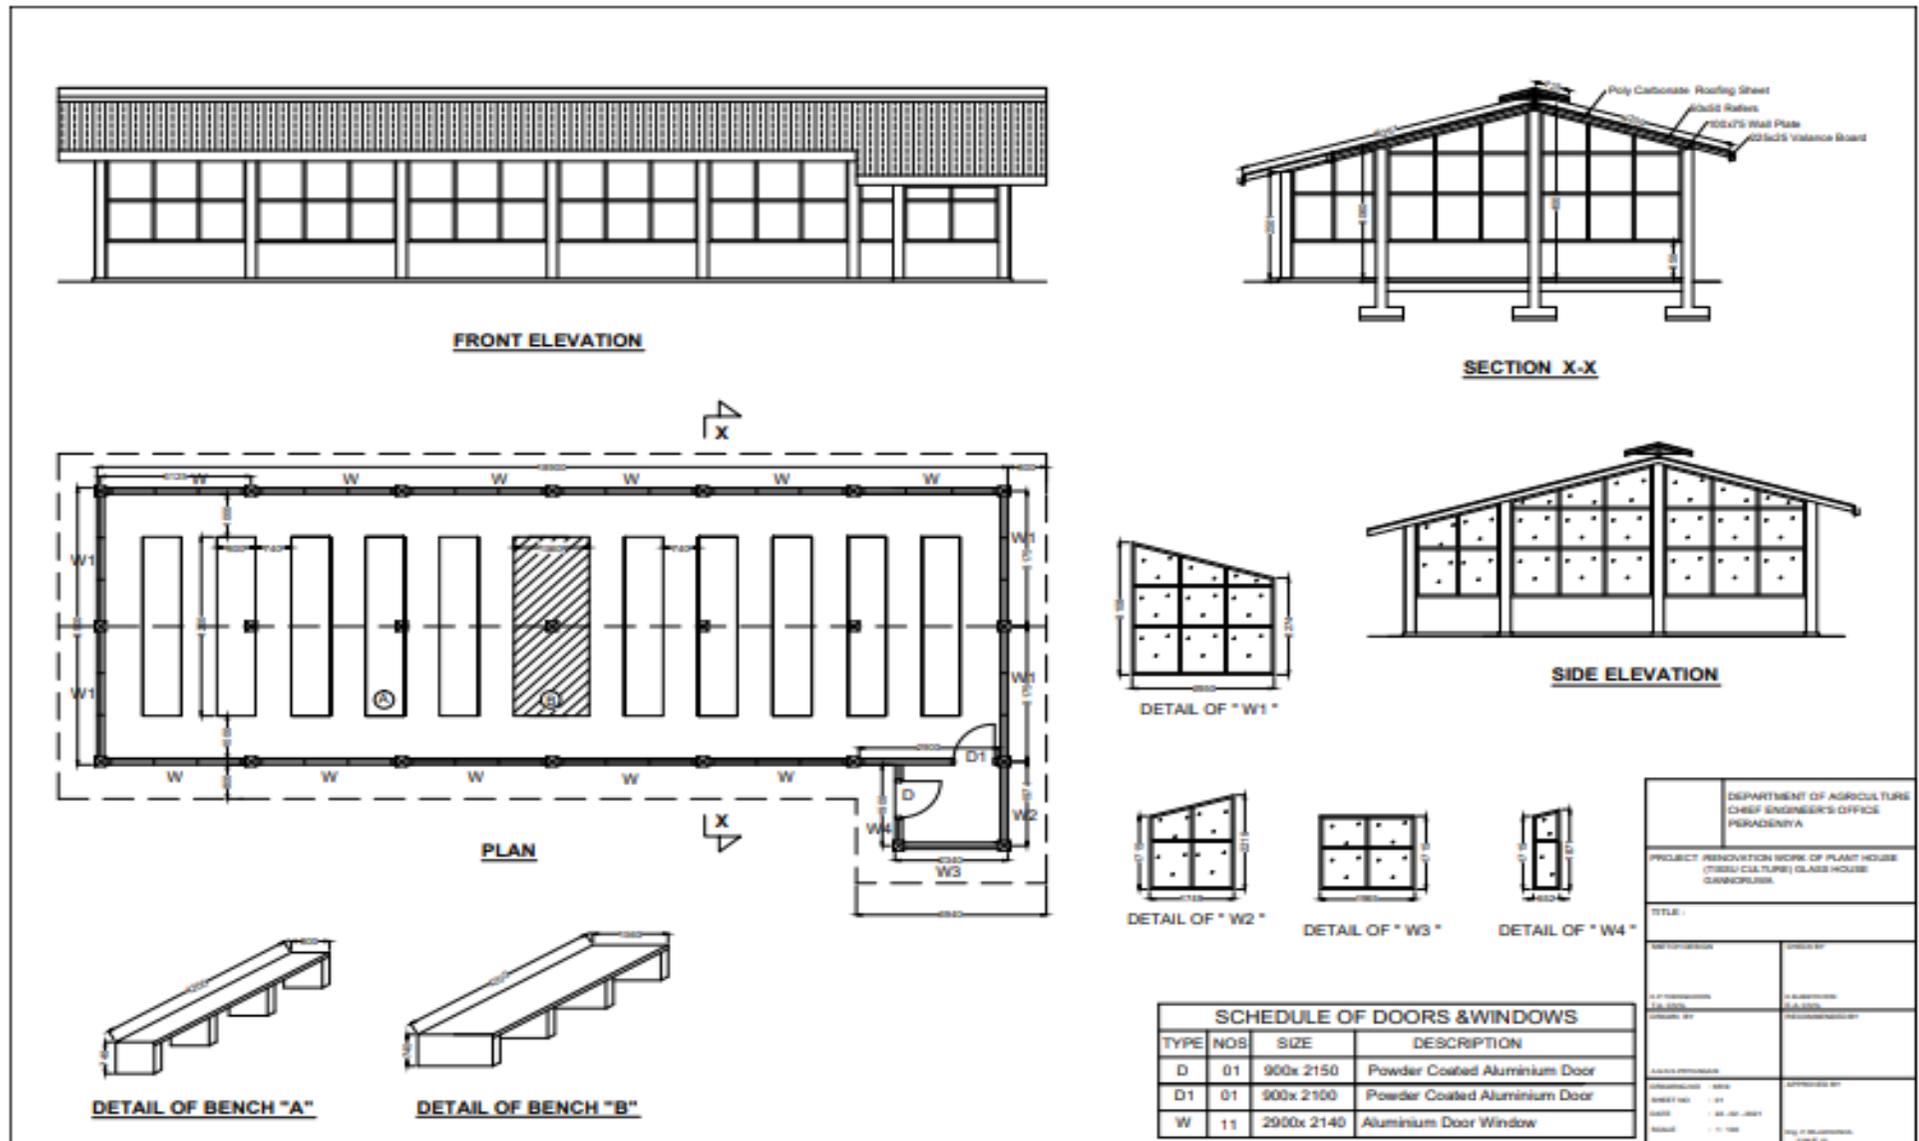

5. Renovation Work of Plant House 1 at Entomology Division - HORDI, Gannoruwa

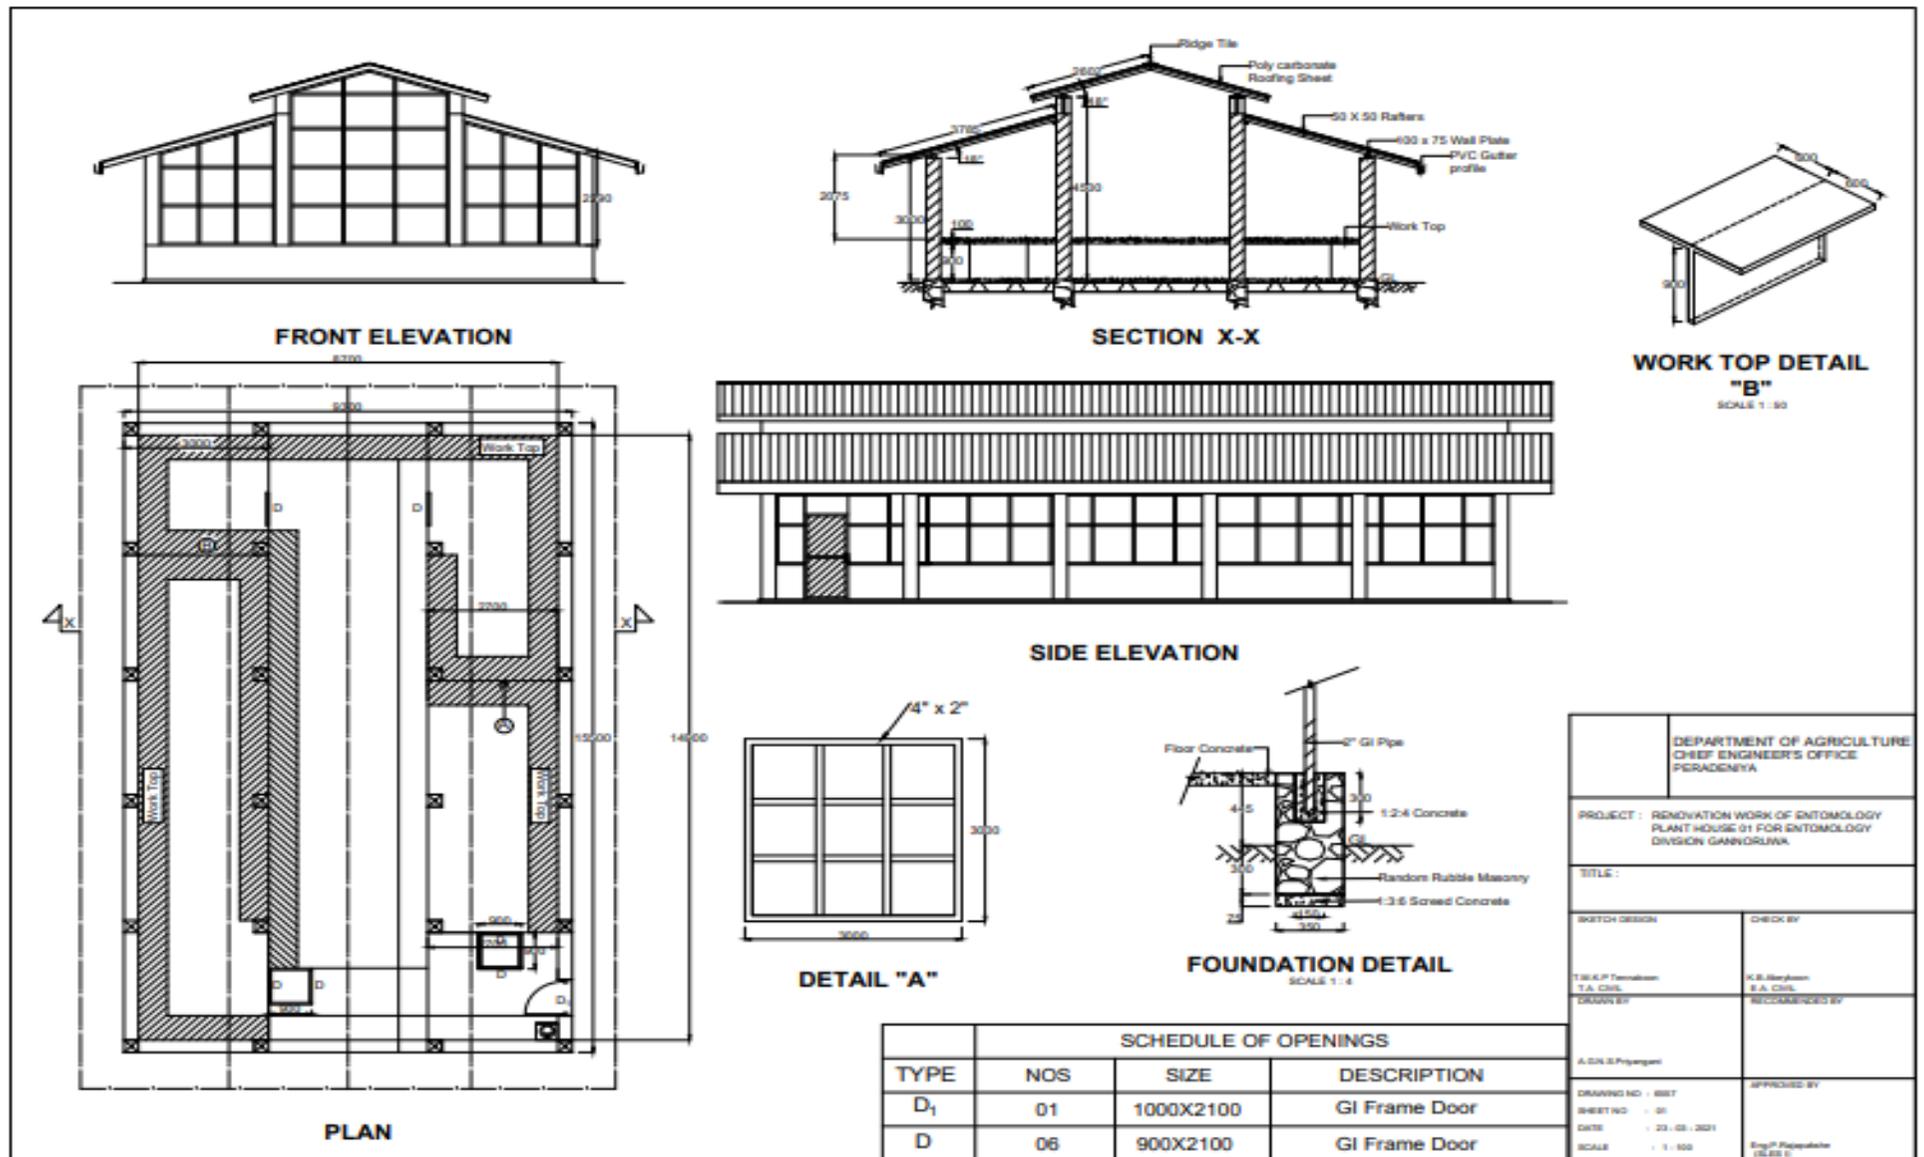


6. Plant House of Pathology-Model- HORDI, Gannoruwa

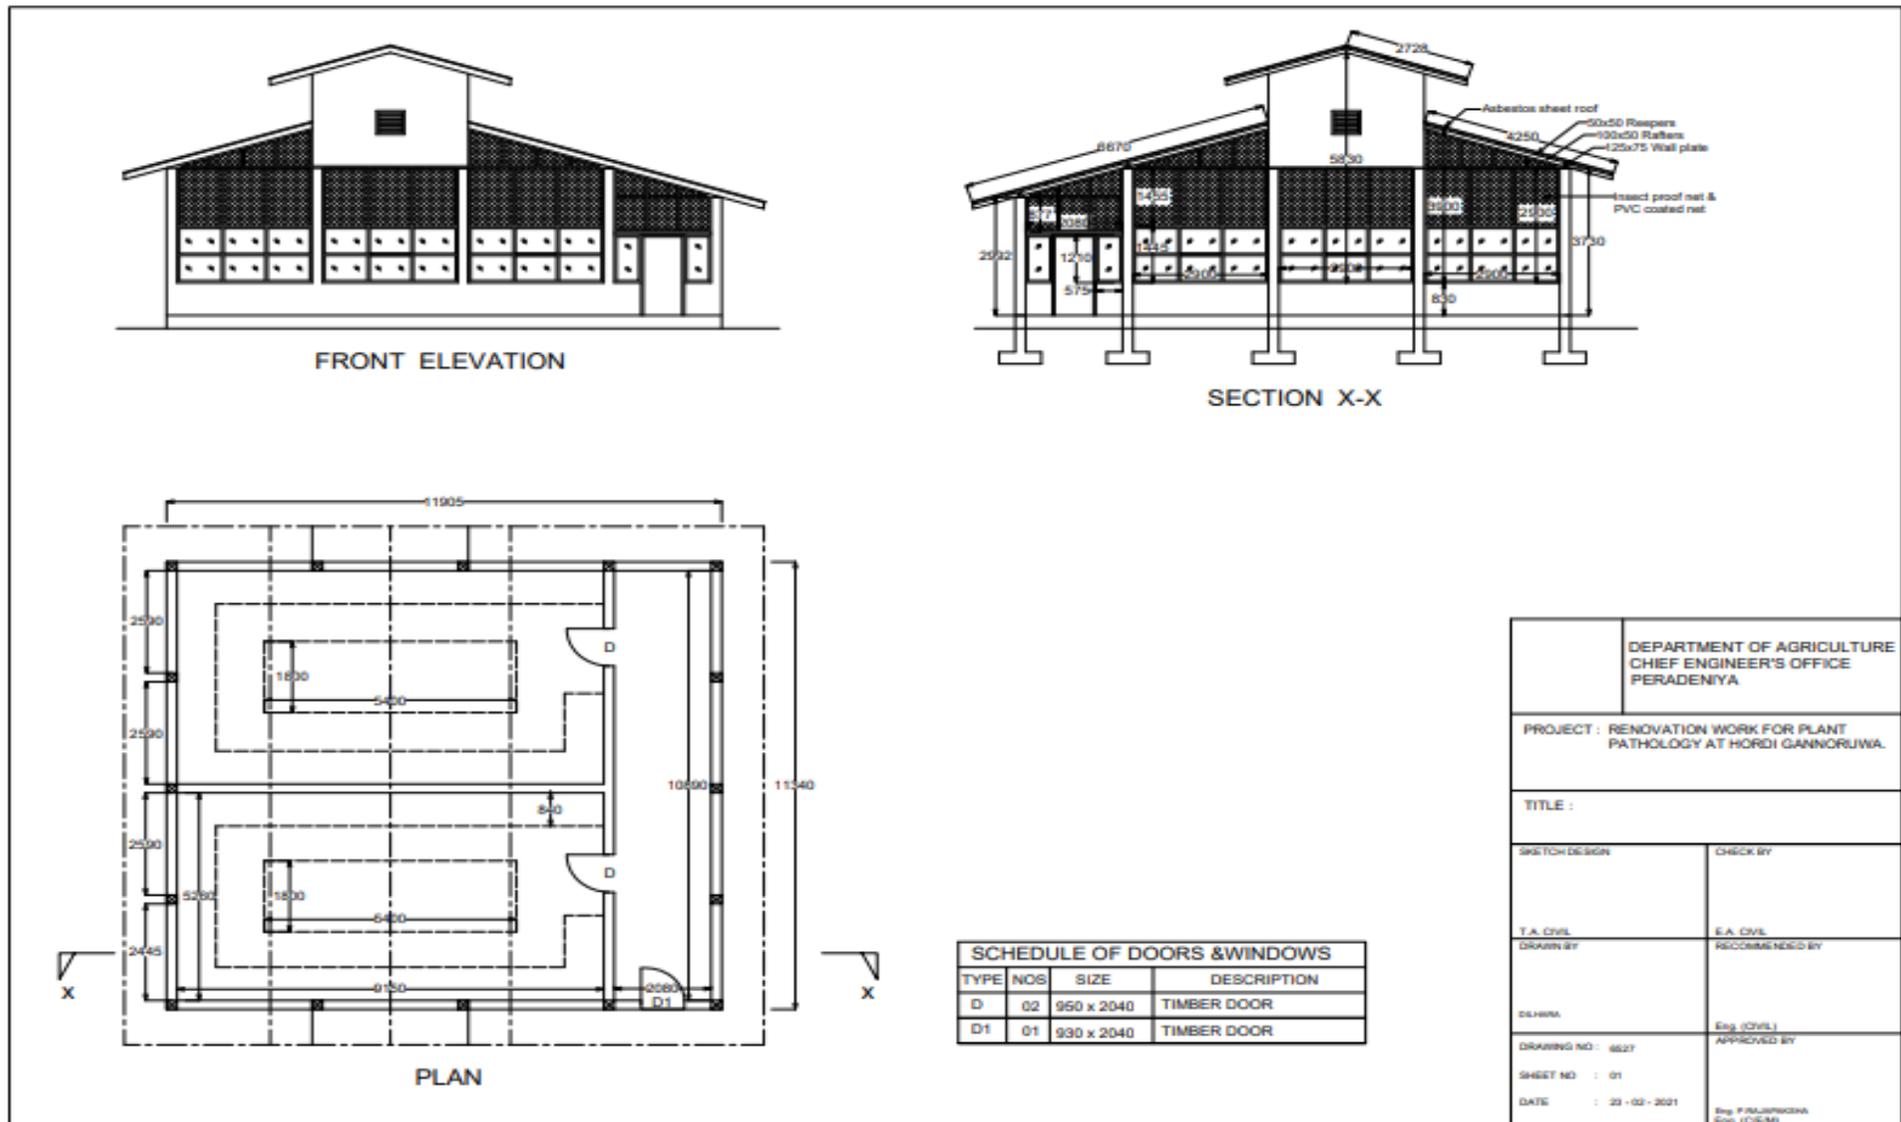

SCHEDULE OF DOORS & WINDOWS			
TYPE	NOS	SIZE	DESCRIPTION
D	02	950 x 2040	TIMBER DOOR
D1	01	930 x 2040	TIMBER DOOR

DEPARTMENT OF AGRICULTURE CHIEF ENGINEER'S OFFICE PERADENIYA	
PROJECT : RENOVATION WORK FOR PLANT PATHOLOGY AT HORDI GANNORUWA.	
TITLE :	
SKETCH DESIGN	CHECK BY
T.A. CIVIL DRAWN BY	E.A. CIVIL RECOMMENDED BY
DLHWA	Eng. (CIVIL)
DRAWING NO : 6627	APPROVED BY
SHEET NO : 01	
DATE : 23 - 02 - 2021	Eng. P. RAJAPKSA Eng. (CIVIL)

7. Plant house of Pathology-Model ELECTRICAL- HORDI, Gannoruwa

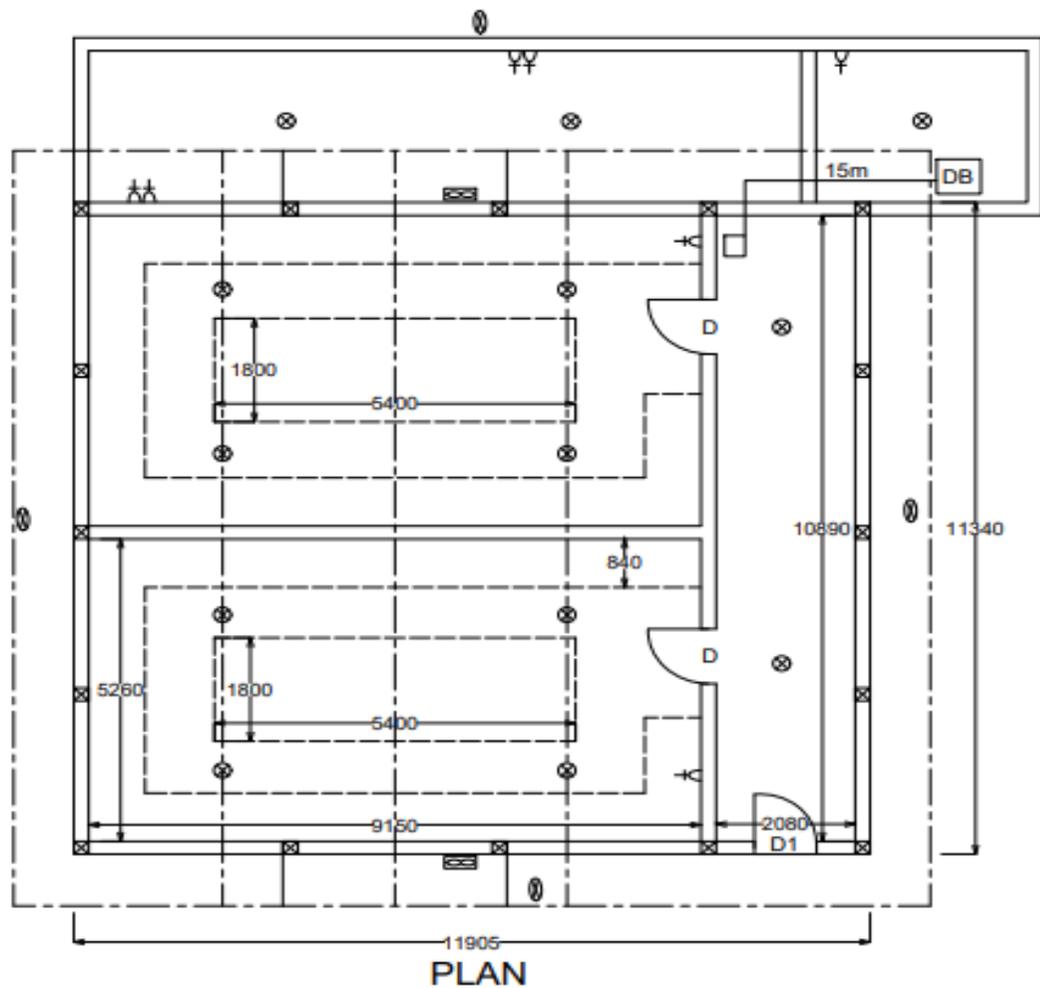

- ⊗ - Pendent type lamp point
- ⊕ - Out door bracket lamp
- ▨ - Exhaust fan
- ⚡ - 13A socket outlet
- ⚡⚡ - Double looped 13A socket outlet

DEPARTMENT OF AGRICULTURE CHIEF ENGINEER'S OFFICE PERADENIYA	
PROJECT : RENOVATION WORK FOR PLANT PATHOLOGY AT HORDI GANNORUWA.	
TITLE : ELECTRICAL LAYOUT	
SKETCH DESIGN	CHECK BY
T.A. (ELECTRICAL) DRAWN BY	E.A. (ELECTRICAL) RECOMMENDED BY
DILHARA	Eng. (ELECTRICAL) APPROVED BY
DRAWING NO : 6527	Eng. P.RAJAPAKSHA Eng. (C/E/M)
SHEET NO : 02	
DATE : 13 - 05 - 2021	

ESF/SAFEGUARDS INTERIM NOTE: COVID-19 CONSIDERATIONS IN CONSTRUCTION/CIVIL WORKS PROJECTS

This note was issued on April 7, 2020 and includes links to the latest guidance as of this date (e.g. from WHO). Given the COVID-19 situation is rapidly evolving, when using this note it is important to check whether any updates to these external resources have been issued.

1. INTRODUCTION

The COVID-19 pandemic presents Governments with unprecedented challenges. Addressing COVID-19 related issues in both existing and new operations starts with recognizing that this is not business as usual and that circumstances require a highly adaptive responsive management design to avoid, minimize and manage what may be a rapidly evolving situation. In many cases, we will ask Borrowers to use reasonable efforts in the circumstances, recognizing that what may be possible today may be different next week (both positively, because more supplies and guidance may be available, and negatively, because the spread of the virus may have accelerated).

This interim note is intended to provide guidance to teams on how to support Borrowers in addressing key issues associated with COVID-19, and consolidates the advice that has already been provided over the past month. As such, it should be used in place of other guidance that has been provided to date. This note will be developed as the global situation and the Bank's learning (and that of others) develops. This is not a time when 'one size fits all'. More than ever, teams will need to work with Borrowers and projects to understand the activities being carried out and the risks that these activities may entail. Support will be needed in designing mitigation measures that are implementable in the context of the project. These measures will need to take into account capacity of the Government agencies, availability of supplies and the practical challenges of operations on-the-ground, including stakeholder engagement, supervision and monitoring. In many circumstances, communication itself may be challenging, where face-to-face meetings are restricted or prohibited, and where IT solutions are limited or unreliable.

This note emphasizes the importance of careful scenario planning, clear procedures and protocols, management systems, effective communication and coordination, and the need for high levels of responsiveness in a changing environment. It recommends assessing the current situation of the project, putting in place mitigation measures to avoid or minimize the chance of infection, and planning what to do if either project workers become infected or the work force includes workers from proximate communities affected by COVID-19. In many projects, measures to avoid or minimize will need to be implemented at the same time as dealing with sick workers and relations with the community, some of whom may also be ill or concerned about infection. Borrowers should understand the obligations that contractors have under their existing contracts (see Section 3), require contractors to put in place appropriate organizational structures (see Section 4) and develop procedures to address different aspects of COVID-19 (see Section 5).

2. CHALLENGES WITH CONSTRUCTION/CIVIL WORKS

Projects involving construction/civil works frequently involve a large work force, together with suppliers and supporting functions and services. The work force may comprise workers from international, national, regional, and local labor markets. They may need to live in on-site accommodation, lodge within communities close to work sites or return to their homes after work. There may be different contractors

permanently present on site, carrying out different activities, each with their own dedicated workers. Supply chains may involve international, regional and national suppliers facilitating the regular flow of goods and services to the project (including supplies essential to the project such as fuel, food, and water). As such there will also be regular flow of parties entering and exiting the site; support services, such as catering, cleaning services, equipment, material and supply deliveries, and specialist sub-contractors, brought in to deliver specific elements of the works.

Given the complexity and the concentrated number of workers, the potential for the spread of infectious disease in projects involving construction is extremely serious, as are the implications of such a spread. Projects may experience large numbers of the work force becoming ill, which will strain the project's health facilities, have implications for local emergency and health services and may jeopardize the progress of the construction work and the schedule of the project. Such impacts will be exacerbated where a work force is large and/or the project is in remote or under-serviced areas. In such circumstances, relationships with the community can be strained or difficult and conflict can arise, particularly if people feel they are being exposed to disease by the project or are having to compete for scarce resources. The project must also exercise appropriate precautions against introducing the infection to local communities.

3. DOES THE CONSTRUCTION CONTRACT COVER THIS SITUATION?

Given the unprecedented nature of the COVID-19 pandemic, it is unlikely that the existing construction/civil works contracts will cover all the things that a prudent contractor will need to do. Nevertheless, the first place for a Borrower to start is with the contract, determining what a contractor's existing obligations are, and how these relate to the current situation.

The obligations on health and safety will depend on what kind of contract exists (between the Borrower and the main contractor; between the main contractors and the sub-contractors). It will differ if the Borrower used the World Bank's standard procurement documents (SPDs) or used national bidding documents. If a FIDIC document has been used, there will be general provisions relating to health and safety. For example, the standard FIDIC, Conditions of Contract for Construction (Second Edition 2017), which contains no 'ESF enhancements', states (in the General Conditions, clause 6.7) that the Contractor will be required:

- to take all necessary precautions to maintain the health and safety of the Contractor's Personnel
- to appoint a health and safety officer at site, who will have the authority to issue directives for the purpose of maintaining the health and safety of all personnel authorized to enter and or work on the site and to take protective measures to prevent accidents
- to ensure, in collaboration with local health authorities, that medical staff, first aid facilities, sick bay, ambulance services and any other medical services specified are available at all times at the site and at any accommodation
- to ensure suitable arrangements are made for all necessary welfare and hygiene requirements and for the prevention of epidemics

These requirements have been enhanced through the introduction of the ESF into the SPDs (edition dated July 2019). The general FIDIC clause referred to above has been strengthened to reflect the requirements of the ESF. Beyond FIDIC's general requirements discussed above, the Bank's Particular Conditions include a number of relevant requirements on the Contractor, including:

- to provide health and safety training for Contractor's Personnel (which include project workers and all personnel that the Contractor uses on site, including staff and other employees of the Contractor and Subcontractors and any other personnel assisting the Contractor in carrying out project activities)
- to put in place workplace processes for Contractor's Personnel to report work situations that are not safe or healthy
- gives Contractor's Personnel the right to report work situations which they believe are not safe or healthy, and to remove themselves from a work situation which they have a reasonable justification to believe presents an imminent and serious danger to their life or health (with no reprisal for reporting or removing themselves)
- requires measures to be in place to avoid or minimize the spread of diseases including measures to avoid or minimize the transmission of communicable diseases that may be associated with the influx of temporary or permanent contract-related labor
- to provide an easily accessible grievance mechanism to raise workplace concerns

Where the contract form used is FIDIC, the Borrower (as the Employer) will be represented by the Engineer (also referred to in this note as the Supervising Engineer). The Engineer will be authorized to exercise authority specified in or necessarily implied from the construction contract. In such cases, the Engineer (through its staff on site) will be the interface between the PIU and the Contractor. It is important therefore to understand the scope of the Engineer's responsibilities. It is also important to recognize that in the case of infectious diseases such as COVID-19, project management – through the Contractor/subcontractor hierarchy – is only as effective as the weakest link. A thorough review of management procedures/plans as they will be implemented through the entire contractor hierarchy is important. Existing contracts provide the outline of this structure; they form the basis for the Borrower to understand how proposed mitigation measures will be designed and how adaptive management will be implemented, and to start a conversation with the Contractor on measures to address COVID-19 in the project.

4. WHAT PLANNING SHOULD THE BORROWER BE DOING?

Task teams should work with Borrowers (PIUs) to confirm that projects (i) are taking adequate precautions to prevent or minimize an outbreak of COVID-19, and (ii) have identified what to do in the event of an outbreak. Suggestions on how to do this are set out below:

- The PIU, either directly or through the Supervising Engineer, should request details in writing from the main Contractor of the measures being taken to address the risks. As stated in Section 3, the construction contract should include health and safety requirements, and these can be used as the basis for identification of, and requirements to implement, COVID-19 specific measures. The measures may be presented as a contingency plan, as an extension of the existing project emergency and preparedness plan or as standalone procedures. The measures may be reflected in revisions to the project's health and safety manual. This request should be made in writing (following any relevant procedure set out in the contract between the Borrower and the contractor).
- In making the request, it may be helpful for the PIU to specify the areas that should be covered. This should include the items set out in Section 5 below and take into account current and relevant

guidance provided by national authorities, WHO and other organizations. See the list of references in the Annex to this note.

- The PIU should require the Contractor to convene regular meetings with the project health and safety specialists and medical staff (and where appropriate the local health authorities), and to take their advice in designing and implementing the agreed measures.
- Where possible, a senior person should be identified as a focal point to deal with COVID-19 issues. This can be a work supervisor or a health and safety specialist. This person can be responsible for coordinating preparation of the site and making sure that the measures taken are communicated to the workers, those entering the site and the local community. It is also advisable to designate at least one back-up person, in case the focal point becomes ill; that person should be aware of the arrangements that are in place.
- On sites where there are a number of contractors and therefore (in effect) different work forces, the request should emphasize the importance of coordination and communication between the different parties. Where necessary, the PIU should request the main contractor to put in place a protocol for regular meetings of the different contractors, requiring each to appoint a designated staff member (with back up) to attend such meetings. If meetings cannot be held in person, they should be conducted using whatever IT is available. The effectiveness of mitigation measures will depend on the weakest implementation, and therefore it is important that all contractors and sub-contractors understand the risks and the procedure to be followed.
- The PIU, either directly or through the Supervising Engineer, may provide support to projects in identifying appropriate mitigation measures, particularly where these will involve interface with local services, in particular health and emergency services. In many cases, the PIU can play a valuable role in connecting project representatives with local Government agencies, and helping coordinate a strategic response, which takes into account the availability of resources. To be most effective, projects should consult and coordinate with relevant Government agencies and other projects in the vicinity.
- Workers should be encouraged to use the existing project grievance mechanism to report concerns relating to COVID-19, preparations being made by the project to address COVID-19 related issues, how procedures are being implemented, and concerns about the health of their co-workers and other staff.

5. WHAT SHOULD THE CONTRACTOR COVER?

The Contractor should identify measures to address the COVID-19 situation. What will be possible will depend on the context of the project: the location, existing project resources, availability of supplies, capacity of local emergency/health services, the extent to which the virus already exist in the area. A systematic approach to planning, recognizing the challenges associated with rapidly changing circumstances, will help the project put in place the best measures possible to address the situation. As discussed above, measures to address COVID-19 may be presented in different ways (as a contingency plan, as an extension of the existing project emergency and preparedness plan or as standalone procedures). PIUs and contractors should refer to guidance issued by relevant authorities, both national

and international (e.g. WHO), which is regularly updated (see sample References and links provided in the Annex).

Addressing COVID-19 at a project site goes beyond occupational health and safety, and is a broader project issue which will require the involvement of different members of a project management team. In many cases, the most effective approach will be to establish procedures to address the issues, and then to ensure that these procedures are implemented systematically. Where appropriate given the project context, a designated team should be established to address COVID-19 issues, including PIU representatives, the Supervising Engineer, management (e.g. the project manager) of the contractor and sub-contractors, security, and medical and OHS professionals. Procedures should be clear and straightforward, improved as necessary, and supervised and monitored by the COVID-19 focal point(s). Procedures should be documented, distributed to all contractors, and discussed at regular meetings to facilitate adaptive management. The issues set out below include a number that represent expected good workplace management but are especially pertinent in preparing the project response to COVID-19.

(a) ASSESSING WORKFORCE CHARACTERISTICS

Many construction sites will have a mix of workers e.g. workers from the local communities; workers from a different part of the country; workers from another country. Workers will be employed under different terms and conditions and be accommodated in different ways. Assessing these different aspects of the workforce will help in identifying appropriate mitigation measures:

- The Contractor should prepare a detailed profile of the project work force, key work activities, schedule for carrying out such activities, different durations of contract and rotations (e.g. 4 weeks on, 4 weeks off).
- This should include a breakdown of workers who reside at home (i.e. workers from the community), workers who lodge within the local community and workers in on-site accommodation. Where possible, it should also identify workers that may be more at risk from COVID-19, those with underlying health issues or who may be otherwise at risk.
- Consideration should be given to ways in which to minimize movement in and out of site. This could include lengthening the term of existing contracts, to avoid workers returning home to affected areas, or returning to site from affected areas.
- Workers accommodated on site should be required to minimize contact with people near the site, and in certain cases be prohibited from leaving the site for the duration of their contract, so that contact with local communities is avoided.
- Consideration should be given to requiring workers lodging in the local community to move to site accommodation (subject to availability) where they would be subject to the same restrictions.
- Workers from local communities, who return home daily, weekly or monthly, will be more difficult to manage. They should be subject to health checks at entry to the site (as set out above) and at some point, circumstances may make it necessary to require them to either use accommodation on site or not to come to work.

(b) ENTRY/EXIT TO THE WORK SITE AND CHECKS ON COMMENCEMENT OF WORK

Entry/exit to the work site should be controlled and documented for both workers and other parties, including support staff and suppliers. Possible measures may include:

- Establishing a system for controlling entry/exit to the site, securing the boundaries of the site, and establishing designating entry/exit points (if they do not already exist). Entry/exit to the site should be documented.
- Training security staff on the (enhanced) system that has been put in place for securing the site and controlling entry and exit, the behaviors required of them in enforcing such system and any COVID - 19 specific considerations.
- Training staff who will be monitoring entry to the site, providing them with the resources they need to document entry of workers, conducting temperature checks and recording details of any worker that is denied entry.
- Confirming that workers are fit for work before they enter the site or start work. While procedures should already be in place for this, special attention should be paid to workers with underlying health issues or who may be otherwise at risk. Consideration should be given to demobilization of staff with underlying health issues.
- Checking and recording temperatures of workers and other people entering the site or requiring self-reporting prior to or on entering the site.
- Providing daily briefings to workers prior to commencing work, focusing on COVID-19 specific considerations including cough etiquette, hand hygiene and distancing measures, using demonstrations and participatory methods.
- During the daily briefings, reminding workers to self-monitor for possible symptoms (fever, cough) and to report to their supervisor or the COVID-19 focal point if they have symptoms or are feeling unwell.
- Preventing a worker from an affected area or who has been in contact with an infected person from returning to the site for 14 days or (if that is not possible) isolating such worker for 14 days.
- Preventing a sick worker from entering the site, referring them to local health facilities if necessary or requiring them to isolate at home for 14 days.

(c) GENERAL HYGIENE

Requirements on general hygiene should be communicated and monitored, to include:

- Training workers and staff on site on the signs and symptoms of COVID-19, how it is spread, how to protect themselves (including regular handwashing and social distancing) and what to do if they or other people have symptoms (for further information see [WHO COVID-19 advice for the public](#)).
- Placing posters and signs around the site, with images and text in local languages.
- Ensuring handwashing facilities supplied with soap, disposable paper towels and closed waste bins exist at key places throughout site, including at entrances/exits to work areas; where there is a toilet, canteen or food distribution, or provision of drinking water; in worker accommodation; at waste stations; at stores; and in common spaces. Where handwashing facilities do not exist or are not adequate, arrangements should be made to set them up. Alcohol based sanitizer (if available, 60-95% alcohol) can also be used.
- Review worker accommodations, and assess them in light of the requirements set out in [IFC/EBRD guidance on Workers' Accommodation: processes and standards](#), which provides valuable guidance as to good practice for accommodation.
- Setting aside part of worker accommodation for precautionary self-quarantine as well as more formal isolation of staff who may be infected (see paragraph (f)).

(d) CLEANING AND WASTE DISPOSAL

Conduct regular and thorough cleaning of all site facilities, including offices, accommodation, canteens, common spaces. Review cleaning protocols for key construction equipment (particularly if it is being operated by different workers). This should include:

- Providing cleaning staff with adequate cleaning equipment, materials and disinfectant.
- Review general cleaning systems, training cleaning staff on appropriate cleaning procedures and appropriate frequency in high use or high-risk areas.
- Where it is anticipated that cleaners will be required to clean areas that have been or are suspected to have been contaminated with COVID-19, providing them with appropriate PPE: gowns or aprons, gloves, eye protection (masks, goggles or face screens) and boots or closed work shoes. If appropriate PPE is not available, cleaners should be provided with best available alternatives.
- Training cleaners in proper hygiene (including handwashing) prior to, during and after conducting cleaning activities; how to safely use PPE (where required); in waste control (including for used PPE and cleaning materials).
- Any medical waste produced during the care of ill workers should be collected safely in designated containers or bags and treated and disposed of following relevant requirements (e.g., national, WHO). If open burning and incineration of medical wastes is necessary, this should be for as limited a duration as possible. Waste should be reduced and segregated, so that only the smallest amount of waste is incinerated (for further information [see WHO interim guidance on water, sanitation and waste management for COVID-19](#)).

(e) ADJUSTING WORK PRACTICES

Consider changes to work processes and timings to reduce or minimize contact between workers, recognizing that this is likely to impact the project schedule. Such measures could include:

- Decreasing the size of work teams.
- Limiting the number of workers on site at any one time.
- Changing to a 24-hour work rotation.
- Adapting or redesigning work processes for specific work activities and tasks to enable social distancing, and training workers on these processes.
- Continuing with the usual safety trainings, adding COVID-19 specific considerations. Training should include proper use of normal PPE. While as of the date of this note, general advice is that construction workers do not require COVID-19 specific PPE, this should be kept under review (for further information see [WHO interim guidance on rational use of personal protective equipment \(PPE\) for COVID-19](#)).
- Reviewing work methods to reduce use of construction PPE, in case supplies become scarce or the PPE is needed for medical workers or cleaners. This could include, e.g. trying to reduce the need for dust masks by checking that water sprinkling systems are in good working order and are maintained or reducing the speed limit for haul trucks.
- Arranging (where possible) for work breaks to be taken in outdoor areas within the site.
- Consider changing canteen layouts and phasing meal times to allow for social distancing and phasing access to and/or temporarily restricting access to leisure facilities that may exist on site, including gyms.

- At some point, it may be necessary to review the overall project schedule, to assess the extent to which it needs to be adjusted (or work stopped completely) to reflect prudent work practices, potential exposure of both workers and the community and availability of supplies, taking into account Government advice and instructions.

(f) PROJECT MEDICAL SERVICES

Consider whether existing project medical services are adequate, taking into account existing infrastructure (size of clinic/medical post, number of beds, isolation facilities), medical staff, equipment and supplies, procedures and training. Where these are not adequate, consider upgrading services where possible, including:

- Expanding medical infrastructure and preparing areas where patients can be isolated. Guidance on setting up isolation facilities is set out in [WHO interim guidance on considerations for quarantine of individuals in the context of containment for COVID-19](#). Isolation facilities should be located away from worker accommodation and ongoing work activities. Where possible, workers should be provided with a single well-ventilated room (open windows and door). Where this is not possible, isolation facilities should allow at least 1 meter between workers in the same room, separating workers with curtains, if possible. Sick workers should limit their movements, avoiding common areas and facilities and not be allowed visitors until they have been clear of symptoms for 14 days. If they need to use common areas and facilities (e.g. kitchens or canteens), they should only do so when unaffected workers are not present and the area/facilities should be cleaned prior to and after such use.
- Training medical staff, which should include current WHO advice on COVID-19 and recommendations on the specifics of COVID-19. Where COVID-19 infection is suspected, medical providers on site should follow [WHO interim guidance on infection prevention and control during health care when novel coronavirus \(nCoV\) infection is suspected](#).
- Training medical staff in testing, if testing is available.
- Assessing the current stock of equipment, supplies and medicines on site, and obtaining additional stock, where required and possible. This could include medical PPE, such as gowns, aprons, medical masks, gloves, and eye protection. Refer to WHO guidance as to what is advised (for further information see [WHO interim guidance on rational use of personal protective equipment \(PPE\) for COVID-19](#)).
- If PPE items are unavailable due to world-wide shortages, medical staff on the project should agree on alternatives and try to procure them. Alternatives that may commonly be found on construction sites include dust masks, construction gloves and eye goggles. While these items are not recommended, they should be used as a last resort if no medical PPE is available.
- Ventilators will not normally be available on work sites, and in any event, intubation should only be conducted by experienced medical staff. If a worker is extremely ill and unable to breathe properly on his or her own, they should be referred immediately to the local hospital (see (g) below).
- Review existing methods for dealing with medical waste, including systems for storage and disposal (for further information see [WHO interim guidance on water, sanitation and waste management for COVID-19](#), and [WHO guidance on safe management of wastes from health-care activities](#)).

(g) LOCAL MEDICAL AND OTHER SERVICES

Given the limited scope of project medical services, the project may need to refer sick workers to local medical services. Preparation for this includes:

- Obtaining information as to the resources and capacity of local medical services (e.g. number of beds, availability of trained staff and essential supplies).
- Conducting preliminary discussions with specific medical facilities, to agree what should be done in the event of ill workers needing to be referred.
- Considering ways in which the project may be able to support local medical services in preparing for members of the community becoming ill, recognizing that the elderly or those with pre-existing medical conditions require additional support to access appropriate treatment if they become ill.
- Clarifying the way in which an ill worker will be transported to the medical facility, and checking availability of such transportation.
- Establishing an agreed protocol for communications with local emergency/medical services.
- Agreeing with the local medical services/specific medical facilities the scope of services to be provided, the procedure for in-take of patients and (where relevant) any costs or payments that may be involved.
- A procedure should also be prepared so that project management knows what to do in the unfortunate event that a worker ill with COVID-19 dies. While normal project procedures will continue to apply, COVID-19 may raise other issues because of the infectious nature of the disease. The project should liaise with the relevant local authorities to coordinate what should be done, including any reporting or other requirements under national law.

(h) INSTANCES OR SPREAD OF THE VIRUS

WHO provides detailed advice on what should be done to treat a person who becomes sick or displays symptoms that could be associated with the COVID-19 virus (for further information see [WHO interim guidance on infection prevention and control during health care when novel coronavirus \(nCoV\) infection is suspected](#)). The project should set out risk-based procedures to be followed, with differentiated approaches based on case severity (mild, moderate, severe, critical) and risk factors (such as age, hypertension, diabetes) (for further information see [WHO interim guidance on operational considerations for case management of COVID-19 in health facility and community](#)). These may include the following:

- If a worker has symptoms of COVID-19 (e.g. fever, dry cough, fatigue) the worker should be removed immediately from work activities and isolated on site.
- If testing is available on site, the worker should be tested on site. If a test is not available at site, the worker should be transported to the local health facilities to be tested (if testing is available).
- If the test is positive for COVID-19 or no testing is available, the worker should continue to be isolated. This will either be at the work site or at home. If at home, the worker should be transported to their home in transportation provided by the project.
- Extensive cleaning procedures with high-alcohol content disinfectant should be undertaken in the area where the worker was present, prior to any further work being undertaken in that area. Tools used by the worker should be cleaned using disinfectant and PPE disposed of.
- Co-workers (i.e. workers with whom the sick worker was in close contact) should be required to stop work, and be required to quarantine themselves for 14 days, even if they have no symptoms.

- Family and other close contacts of the worker should be required to quarantine themselves for 14 days, even if they have no symptoms.
- If a case of COVID-19 is confirmed in a worker on the site, visitors should be restricted from entering the site and worker groups should be isolated from each other as much as possible.
- If workers live at home and has a family member who has a confirmed or suspected case of COVID-19, the worker should quarantine themselves and not be allowed on the project site for 14 days, even if they have no symptoms.
- Workers should continue to be paid throughout periods of illness, isolation or quarantine, or if they are required to stop work, in accordance with national law.
- Medical care (whether on site or in a local hospital or clinic) required by a worker should be paid for by the employer.

(i) CONTINUITY OF SUPPLIES AND PROJECT ACTIVITIES

Where COVID-19 occurs, either in the project site or the community, access to the project site may be restricted, and movement of supplies may be affected.

- Identify back-up individuals, in case key people within the project management team (PIU, Supervising Engineer, Contractor, sub-contractors) become ill, and communicate who these are so that people are aware of the arrangements that have been put in place.
- Document procedures, so that people know what they are, and are not reliant on one person's knowledge.
- Understand the supply chain for necessary supplies of energy, water, food, medical supplies and cleaning equipment, consider how it could be impacted, and what alternatives are available. Early pro-active review of international, regional and national supply chains, especially for those supplies that are critical for the project, is important (e.g. fuel, food, medical, cleaning and other essential supplies). Planning for a 1-2 month interruption of critical goods may be appropriate for projects in more remote areas.
- Place orders for/procure critical supplies. If not available, consider alternatives (where feasible).
- Consider existing security arrangements, and whether these will be adequate in the event of interruption to normal project operations.
- Consider at what point it may become necessary for the project to significantly reduce activities or to stop work completely, and what should be done to prepare for this, and to re-start work when it becomes possible or feasible.

(j) TRAINING AND COMMUNICATION WITH WORKERS

Workers need to be provided with regular opportunities to understand their situation, and how they can best protect themselves, their families and the community. They should be made aware of the procedures that have been put in place by the project, and their own responsibilities in implementing them.

- It is important to be aware that in communities close to the site and amongst workers without access to project management, social media is likely to be a major source of information. This raises the importance of regular information and engagement with workers (e.g. through training, town halls, tool boxes) that emphasizes what management is doing to deal with the risks of COVID-19. Allaying fear is an important aspect of work force peace of mind and business continuity. Workers should be given an opportunity to ask questions, express their concerns, and make suggestions.

- Training of workers should be conducted regularly, as discussed in the sections above, providing workers with a clear understanding of how they are expected to behave and carry out their work duties.
- Training should address issues of discrimination or prejudice if a worker becomes ill and provide an understanding of the trajectory of the virus, where workers return to work.
- Training should cover all issues that would normally be required on the work site, including use of safety procedures, use of construction PPE, occupational health and safety issues, and code of conduct, taking into account that work practices may have been adjusted.
- Communications should be clear, based on fact and designed to be easily understood by workers, for example by displaying posters on handwashing and social distancing, and what to do if a worker displays symptoms.

(k) COMMUNICATION AND CONTACT WITH THE COMMUNITY

Relations with the community should be carefully managed, with a focus on measures that are being implemented to safeguard both workers and the community. The community may be concerned about the presence of non-local workers, or the risks posed to the community by local workers presence on the project site. The project should set out risk-based procedures to be followed, which may reflect WHO guidance (for further information see [WHO Risk Communication and Community Engagement \(RCCE\) Action Plan Guidance COVID-19 Preparedness and Response](#)). The following good practice should be considered:

- Communications should be clear, regular, based on fact and designed to be easily understood by community members.
- Communications should utilize available means. In most cases, face-to-face meetings with the community or community representatives will not be possible. Other forms of communication should be used; posters, pamphlets, radio, text message, electronic meetings. The means used should take into account the ability of different members of the community to access them, to make sure that communication reaches these groups.
- The community should be made aware of procedures put in place at site to address issues related to COVID-19. This should include all measures being implemented to limit or prohibit contact between workers and the community. These need to be communicated clearly, as some measures will have financial implications for the community (e.g. if workers are paying for lodging or using local facilities). The community should be made aware of the procedure for entry/exit to the site, the training being given to workers and the procedure that will be followed by the project if a worker becomes sick.
- If project representatives, contractors or workers are interacting with the community, they should practice social distancing and follow other COVID-19 guidance issued by relevant authorities, both national and international (e.g. WHO).

6. EMERGENCY POWERS AND LEGISLATION

Many Borrowers are enacting emergency legislation. The scope of such legislation, and the way it interacts with other legal requirements, will vary from country to country. Such legislation can cover a range of issues, for example:

- Declaring a public health emergency

- Authorizing the use of police or military in certain activities (e.g. enforcing curfews or restrictions on movement)
- Ordering certain categories of employees to work longer hours, not to take holiday or not to leave their job (e.g. health workers)
- Ordering non-essential workers to stay at home, for reduced pay or compulsory holiday

Except in exceptional circumstances (after referral to the World Bank's Operations Environmental and Social Review Committee (OESRC)), projects will need to follow emergency legislation to the extent that these are mandatory or advisable. It is important that the Borrower understands how mandatory requirements of the legislation will impact the project. Teams should require Borrowers (and in turn, Borrowers should request Contractors) to consider how the emergency legislation will impact the obligations of the Borrower set out in the legal agreement and the obligations set out in the construction contracts. Where the legislation requires a material departure from existing contractual obligations, this should be documented, setting out the relevant provisions.

ANNEX

WHO Guidance

Advice for the public

WHO advice for the public, including on social distancing, respiratory hygiene, self-quarantine, and seeking medical advice, can be consulted on this WHO website:

<https://www.who.int/emergencies/diseases/novel-coronavirus-2019/advice-for-public>

Technical guidance

[Infection prevention and control during health care when novel coronavirus \(nCoV\) infection is suspected](#), issued on 19 March 2020

[Coronavirus disease \(COVID-19\) outbreak: rights, roles and responsibilities of health workers, including key considerations for occupational safety and health](#), issued on 18 March 2020

[Risk Communication and Community Engagement \(RCCE\) Action Plan Guidance COVID-19 Preparedness and Response](#), issued on 16 March 2020

[Considerations for quarantine of individuals in the context of containment for coronavirus disease \(COVID-19\)](#), issued on 19 March 2020

[Operational considerations for case management of COVID-19 in health facility and community](#), issued on 19 March 2020

[Rational use of personal protective equipment for coronavirus disease 2019 \(COVID-19\)](#), issued on 27 February 2020

[Getting your workplace ready for COVID-19](#), issued on 19 March 2020

[Water, sanitation, hygiene and waste management for COVID-19](#), issued on 19 March 2020

[Safe management of wastes from health-care activities](#) issued in 2014

[Advice on the use of masks in the community, during home care and in healthcare settings in the context of the novel coronavirus \(COVID-19\) outbreak](#), issued on March 19, 2020

ILO GUIDANCE

[ILO Standards and COVID-19 FAQ](#), issued on March 23, 2020 (provides a compilation of answers to most frequently asked questions related to international labor standards and COVID-19)

MFI GUIDANCE

[IDB Invest Guidance for Infrastructure Projects on COVID-19: A Rapid Risk Profile and Decision Framework](#)

Annex 6: CEA- Licensed e-waste Collectors in Sri Lanka

 මධ්‍යම පරිසර අධිකාරිය மத்திய சுற்றுமடல் அதிகாரசபை Central Environmental Authority 				
Licensed E-Waste Collectors in Sri Lanka				
No	Address of the Industry	Contact	Types of E-waste	Date of Expiry
1	British Ceylon Produce Export Co.(Pvt) Ltd <i>Operational Address:</i> No.573, Sasdharma Mawatha, Wanawasala, Kelaniya.	Mr. Hisham Abbas Mobile: 077 7958247 Office : 0114 717360 Mail: hafeelabbas@yahoo.com teacom@slk.lk	E-Waste Excluding CFL Bulbs, Fluorescent Bulbs & CRT Monitors	27.09.2022
2	Ceylon Waste Management (Pvt) Ltd <i>Operational Address:</i> 61/1/F2, Kelanimulla, Kelaniya.	Ms. Sewwandi Ranasinghe Director Mobile: 0777 999247 Ms. Asanga Opatha Tel : 0114 336336 Mail : info@sewaste.lk	E-Waste Including CFL Bulbs Fluorescent Bulbs & CRT Monitors/TV	19.08.2022
3	Cleantech (Pvt) Ltd <i>Operational Address:</i> No.281/1, Devamiththa Place, Heiyanthudawa, Sapugaskanda.	Mr. Kasun Karunanayake Manager Mobile : 071 5260624 Office : 0112 368768 Mail : kasun.karunanayake@cleantech.lk	E-Waste excluding CFL Bulbs, Fluorescent Bulbs & CRT Monitors	07.08.2022
4	Eco - Biz World (Pvt) Ltd <i>Operational Address:</i> 621/3, Wekanda Road, Walgama, Malwana.	Mr. A.G.S. Rukmal Mobile: 077 9129100 Office : 0112 476078 Mail: ebw@ecobizworld.com	E-Waste excluding CFL Bulbs, Fluorescent Bulbs & CRT Monitors	12.08.2022
5	Ecogate Lanka Engineering Services <i>Operational Address:</i> No.65/06, WelgedaraRoad, Molligoda, Waddurwa.	Mr. Evton Issec Mobile: 076-9268879 Office : 0113-675688 Mail: ecogatelanka@gmail.com	E-Waste Excluding CFL Bulbs, Fluorescent bulbs, & CRT monitors	Processing
6	Evergreen Trading and Marketing (Pvt) Ltd <i>Operational Address:</i> No.45, Muthuraja Marawatha, Mahola, Wattala	Mr. K.Ashwin Director Mobile: 0704373243 Office : 0758918919	E-Waste Excluding CFL Bulbs, Fluorescent bulbs, & CRT monitors	16.12.2022
7	Hiru Eco Waste Company <i>Operational Address:</i> No.213, Belabotuwa, Bandaragama	Mr. M.L.V.L Perera Mobile: 0762918554 0704429245 Mail: ecowastehiru@gmail.com	E-Waste Excluding CFL Bulbs, Fluorescent bulbs, & CRT monitors	03.10.2022

8	Infinity Green International (Pvt) Ltd <i>Office Address:</i> 454, Kandy Road, Kelaniya. <i>Operational Address:</i> No. 368, New Hunupitiya Road, Dalugama, Kelaniya.	Mr. Sanka Samudaya Mobile: 077 3433183 Office: 0115 923443 Mail: sanka@infinityzone.lk	E-Waste Excluding CFL Bulbs, Fluorescent Bulbs & CRT Monitors	Processing
9	Inova Environmental Services (Pvt) Ltd <i>Operational Address:</i> No. Galaboda Road, Wewalpanarwa, Padukka.	Mr. Ayal Piyathilake Mobile : 0773815989 Office: 0117072323 Mail : ayal.piyathilaka@inovaen.com	E-Waste Excluding CFL Bulbs, Fluorescent bulbs, & CRT monitors	Processing
10	Insee Eco Cycle Lanka (Pvt) Ltd <i>Office Address:</i> 413, R A De Mel Mawatha, Colombo 03. <i>Operational Address:</i> Preprocessing Facility, PO Box 01, Palavi, Puttalam.	Mr. Sarjewa Chulakumara Director Office: 0117 800800 Fax : 0112 555434	E-Waste Excluding CFL Bulbs, Fluorescent bulbs, & CRT monitors	10.05.2022
11	J F Supplier <i>Operational Address:</i> No. 276, Kottawaththa, Mawella.	Mr. M.S.M. Jawfer Mobile : 077 7789496 Office : 035 2248133 Mail : jfsuppliers@gmail.com Web: www.jfsuppliers.webs.com	E-Waste Excluding CFL Bulbs Fluorescent Bulbs & CRT Monitors	04.05.2022
12	Moksh Worldwide (Pvt) Ltd <i>Operational Address:</i> 93/2, Gothami Mawatha, Weluwatte, Wellampitiya.	Mr. Sandeep Chaturvedi Mobile : 077 7733100 075 2550000 Mail: findsandy@live.com	E-Waste Excluding CFL Bulbs, Fluorescent Bulbs & CRT Monitors	29.12.2021
13	N.S.Green Links Lanka (Pvt) Ltd <i>Operational Address:</i> No. 259, Wewagedara, Divulapitiya.	Mr. Nalin Guraratne - 071 4066455 Mr. Osada Weerasinghe - 071 6305184 Telephone: 0112 236366/0115 660900 Email: nalin@greenlink.lk osada@greenlink.lk	E-Waste Excluding CFL Bulbs, Fluorescent Bulbs & CRT Monitors	03.04.2022
14	Recotel Lanka (Pvt) Ltd <i>Operational Address:</i> 260, Sri Ramanathan Mawatha, Colombo 15.	Mr. Susantha Muhandiram Mobile : 0770090067 Mail: susantha@recotel.lanka.com	E-Waste Excluding CFL Bulbs Fluorescent Bulbs & CRT Monitors	23.08.2022
15	SCT Holdings (Pvt) Ltd <i>Operational Address:</i> 203/02, Horana Road, Kottawa.	Mr. Priyantha Basnayaka Mobile : 077 3274682 Office: 0112844228 Mail: sctholdings@gmail.com	E-Waste Excluding CFL Bulbs, Fluorescent bulbs & CRT monitors	20.03.2022
16	Think Green (Pvt) Ltd <i>Operational Address:</i> No.57/33, Muthuruwella Mawatha, Colombo 15.	Mr. Shivabar Muthuramalingam Mobile: 0773 733301, 0777323885 Office: 0112 522 111 Fax: 0112 520 015	E-Waste Excluding CFL Bulbs, Fluorescent bulbs, & CRT monitors	Processing
17	Waymarque(Pvt) Ltd <i>Operational Address:</i> No.264/A/2, Pitiyawala, Uruwatukriyawa.	Mr. J. Gabriel Mobile: 077 7221112	E-Waste Excluding CFL Bulbs, Fluorescent bulbs, & CRT monitors	12.12.2022